



Approval Sheet

Rev.	1.0
Model	WA20-6829B
Date	2021.04.07

DOCUMENTATION FOR APPROVAL

Customer : ALT

PART No. : WA20-6829B (Foxconn P/N: 620.05156.005)

PRODUCT : Full Digital Audio Amplifier

MSL Level : 3

Halogen-Free, Lead-Free : Yes

DATE : 2021. 04. 07

Written by	Checked by	Approved by	Remark
			

(Please Return One of These to Us Immediately with Your Signature for Approval)

Wellang Co., Ltd.

Head Office : #A-601, Silicon Park 35, Pangyo-Ro 255Beon-Gil,
Bundang-Gu, Seongnam-City, Gyeonggi-Do, 463-400, Republic of Korea
TEL:+82-31-8038-4900, FAX: +82-31-8038-4949



Approval Sheet

Rev.	1.0
Model	WA20-6829B
Date	2021.04.07

Contents

1. Datasheet	4
2. Packing Information	93
3. Barcode Information	102
4. Part Structure	105
5. Reliability Test Report	112
6. MSL Test Report	115
7. ESD Test Report	121
8. Actual Exterior Measures	123

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

1. Datasheet

(Total 88Page : 5-92)

WA20-6829B

Full Digital Audio Amplifier 20Wx2

Rev1.1 – 22 Jun. 2020

1. General description

The WA20-6829B is a single chip full digital audio amplifier including power stage for stereo amplifier system. WA20-6829B is integrated with versatile digital audio signal processing functions, high-performance, high-fidelity fully digital PWM modulator and two high-power full-bridge MOSFET power stages.

The WA20-6829B receives digital serial audio data with sampling frequencies of 32kHz, 44.1kHz, 48kHz, and 96kHz. It delivers 2 x 20 watts in stereo mode without heat sink.

The WA20-6829B has a mixer and Bi-Quad filters which can be used to implement the essential audio signal processing functions such as loudness control, compensation of a loud speaker response and parametric equalization.

All the functions of the WA20-6829B can be controlled by internal register values via I²C host interface bus.

2. Features

- 2 CH Stereo (20W x 2 BTL)
- Wide Operating Supply Voltage Range (5V to 28V)
- SDATA Generator (I²S Output)
- Floating Point Operation
- 32 Programmable Bi-Quad Filters
 - Speaker Compensation
 - LPF, HPF, DC Cut
 - Advanced Parametric Equalizer
- ReBASS(Remarkable BASS)
- 3 Band Dynamic Range Control
 - RS(Reinforced Sound) DRC
- Loudness Control
- Protection Circuit
 - OCP(Over Current Protection)
 - OTP(Over Temperature Protection)
 - UVP(Under Voltage Protection)
- Vol/Soft Mute/Power Meter/NS Feedback
- Smart PWM Switch On/Off
- High Efficiency (>90%)
- DC Protection
 - DC Cut Filter
 - Coefficient Memory Checksum
 - Modulation Index Check


3. Applications

- OLED/UHD/FHD TV or Monitor TV
- Docking Station
- Mini-Component Audio Solution

4. Package Information

Type number	Package		
	Name	Description	Marking
WA20-6829B	40QFN 6x6	QFN package	WA20-6829B

5. Pin Information

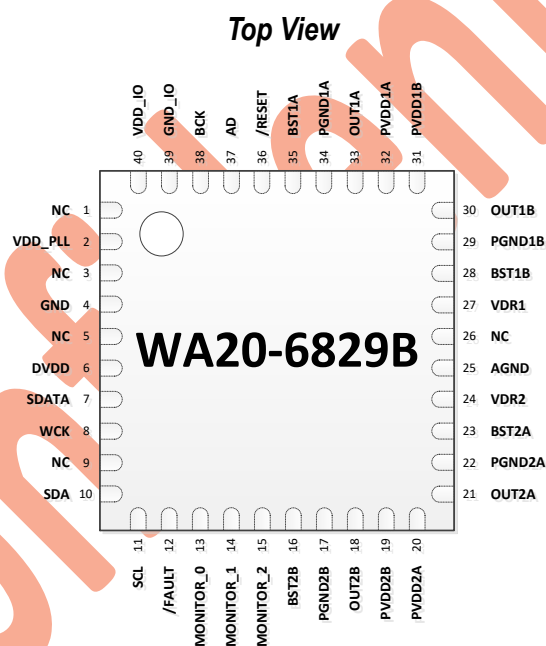

5. Pin Information (Continued)

WA20-6829B, (40QFN 6x6 Package)


Pin No.	Name	I/O	Function
1	NC	-	No connection
2	VDD_PLL	P	Regulator output for PLL digital block, 1.2V
3	NC	-	No connection
4	GND	P	This pin should be connected to Ground
5	NC	-	No connection
6	DVDD	P	Regulator output for Core block, 1.2V
7	SDATA	I	I ² S serial data input
8	WCK	I	I ² S word clock
9	NC	-	No connection
10	SDA	I/O	I ² C data
11	SCL	I	I ² C clock
12	/FAULT	I	Active low to reset internal power stage, Pull-up
13	MONITOR_0	O	No Connection, monitoring signal out from protection logic
14	MONITOR_1	O	Monitoring signal out from processor / I ² S output (SDATA word) / I2C slave addr2 <refer to page 13>
15	MONITOR_2	O	Monitoring signal out from processor / I ² S output (SDATA word)
16	BST2B	P	Bootstrap supply, external capacitor to OUT2B is required
17	PGND2B	P	Ground
18	OUT2B	O	Power stage PWM output 2B
19	PVDD2B	P	Power supply for PWM Power stage 2B
20	PVDD2A	P	Power supply for PWM Power stage 2A
21	OUT2A	O	Power stage PWM output 2A
22	PGND2A	P	Ground
23	BST2A	P	Bootstrap supply, external capacitor to OUT2A is required
24	VDR2	O	Gate drive voltage regulator output, capacitor to GND is required
25	AGND	P	Ground
26	NC	-	No connection
27	VDR1	O	Gate drive voltage regulator output, capacitor to GND is required
28	BST1B	P	Bootstrap supply, external capacitor to OUT1B is required
29	PGND1B	P	Ground
30	OUT1B	O	Power stage PWM output 1B
31	PVDD1B	P	Power supply for PWM Power stage 1B
32	PVDD1A	P	Power supply for PWM Power stage 1A
33	OUT1A	O	Power stage PWM output 1A
34	PGND1A	P	Ground
35	BST1A	P	Bootstrap supply, external capacitor to OUT1A is required

Pin No.	Name	I/O	Function
36	/RESET	I	Active low to reset WA20-6829B, Schmitt trigger input, Pull-down
37	AD	I	I ² C device address selection
38	BCK	I	I ² S bit clock
39	GND_IO	P	Ground for digital interface I/O
40	VDD_IO	P	Power supply for digital interface I/O, 3.3V
	Thermal Pad	P	This pad should be connected to Ground

P = Power or Ground, I = Input, O = Output, I/O = Input / Output

Confidential

6. Block Diagram

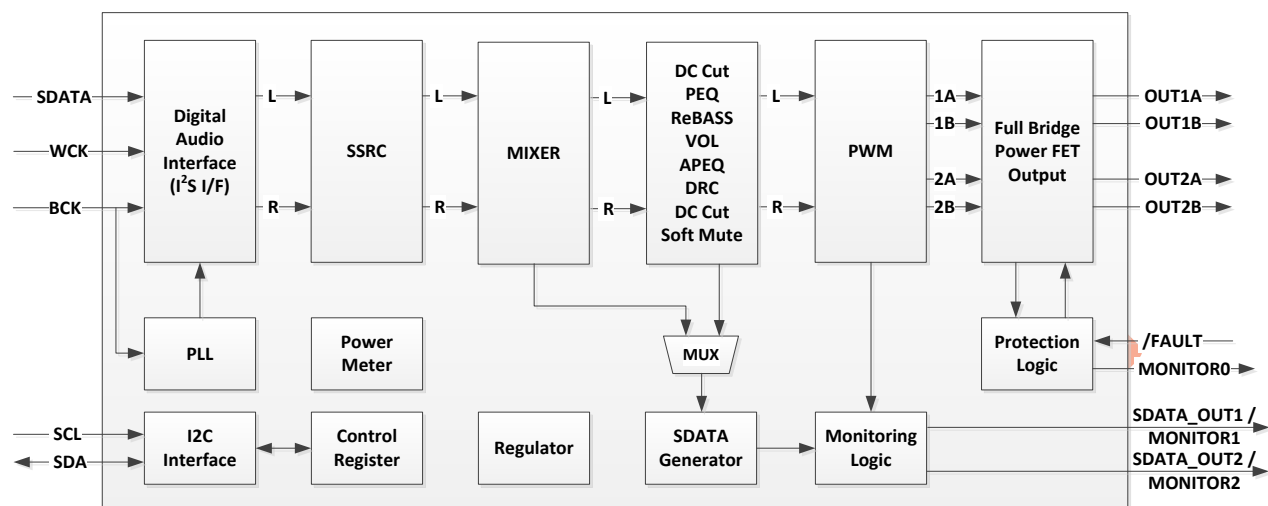

7. Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the Wellang Sales Office/Distributors for availability and specifications.

Parameter	Symbol	Reference	Value	Unit
DVDD voltage	DVDD _{AB}	DGND	-0.3 ~ 1.5	V
VDD_IO voltage	VIO _{AB}	GND_IO	-0.3 ~ 5.25	V
Logic input voltage	VI _{AB}	GND	-0.3 ~ 5.25	V
Logic output voltage	VO _{AB}	GND	-0.3 ~ 5.25	V
PVDDXX voltage	PVDD _{AB}	PGNDXX	30	V
OUTXX voltage	VOU _{AB}	PGNDXX	-0.3 ~ PVDDXX	V
BSTXX voltage	VBST _{AB}	OUTXX	-0.3 ~ 6.0	V
VDRX voltage	VDR _{AB}	AGND	-0.3 ~ 6.0	V
Junction Temperature	T _J		150	°C
Storage Temperature	T _{STG}		-55 ~ +150	°C

8. Recommended Operating Condition

If Military/Aerospace specified devices are required, please contact the Wellang Sales Office/Distributors for availability and specifications.

Parameter	Symbol	Value	Unit
VDD_IO voltage	VDD _{IO}	3.0 ~ 3.6	V
PVDDXX voltage	PVDD	5 ~ 28	V
Operating Ambient Temperature	T _A	-25 ~ 85	°C
Load impedance (BTL) with (10uH+470nF) filter	LOAD _{BTL}	6 ~ 8	Ω
Load impedance (PBTL) with (10uH+470nF) filter	LOAD _{PBTL}	4	Ω

9. Electrical Characteristics

$T_A = 25^\circ\text{C}$, $V_{DDIO} = 3.3\text{V}$, $PVDDXX = 24\text{V}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Logic Block						
Input High voltage	V_{IH}		2.0			V
Input Low voltage	V_{IL}		-0.5		0.8	V
Schmitt trig. Low to High threshold point	V_{T+}		2		3.6	V
Schmitt trig. High to Low threshold point	V_{T-}		-0.5		0.8	V
Input current	I_I	$V_{IN}=V_{IL}$ MAX, $DVDD=MIN$	-50			μA
		$V_{IN}=V_{IH}$ MIN, $DVDD=MIN$			50	μA
Input leakage current	I_L	$V_{IN}=V_{SS}$, $DVDD=MIN$	-10		10	μA
Output Low voltage	V_{OL}	$I_{OL} = -4\text{mA}$	0		0.4	V
Output High voltage	V_{OH}	$I_{OH} = 4\text{mA}$	2.4		3.6	V
LDO output voltage	V_{LDO}	$DVDD$	1.08		1.32	V
Driver Block						
Current consumption	$I_{CC.VDDIO}$	$V_{DD_IO}=3.3\text{V}$, No Input, No Load		30		mA
	$I_{CC.PVDD}$	$PVDD=24\text{V}$, No Input, 8Ω Load with $10\mu\text{H}$ inductor		40		mA
Peak current limit	I_{OCP}			6		A
Thermal shutdown temperature	T_{SD}			150		$^\circ\text{C}$
Under voltage lockout	V_{UVP}			4.2		V
VDRX voltage	V_{VDR}		4.7	5.1	5.5	V
Speaker Amplifier						
SNR	SNR	A-Weighting filter		101		dB
THD+N	THD	$P_{OUT}=1\text{W}$, $R=8\Omega$		0.09		%
Cross talk	Xtalk	1kHz		-96		dB

9. Electrical Characteristics (Continued)

$T_A = 25^\circ\text{C}$, $V_{DD10} = 3.3\text{V}$, $PVDDXX = 24\text{V}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Units
I²C Control Port						
SCL Clock Frequency	f_{SCL}		-		400	kHz
Hold Time Start Condition	t_{HDSTA}		600		-	ns
SCL Low Time	t_{LOW}		1300		-	ns
SCL High Time	t_{HIGH}		600		-	ns
Rise Time of SDA and SCL signals	t_{RISE}		-		300	ns
Fall Time of SDA and SCL signals	t_{FALL}		-		300	ns
Setup Time for STOP Condition	t_{SUSTO}		600		-	ns

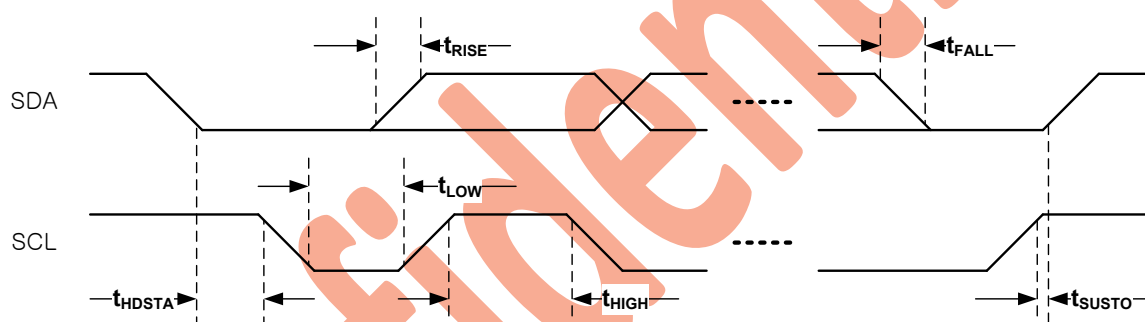


Figure 1. I²C Mode Timing Diagram

9. Electrical Characteristics (Continued)

$T_A = 25^\circ\text{C}$, $V_{DD10} = 3.3\text{V}$, $PVDDXX = 24\text{V}$, unless otherwise specified

Parameter	Symbol	Conditions	Min	Typ	Max	Units
I²S Audio Interface						
BCK high time	t_{BH}		20		-	ns
BCK low time	t_{BL}		20		-	ns
SDATA setup time before BCK rising edge	t_{DS}		10		-	ns
SDATA hold time after BCK rising edge	t_{DH}		10		-	ns
WCK setup time before BCK rising edge	t_{WS}		20		-	ns
BCK rising edge before WCK edge	t_{WH}		20		-	ns

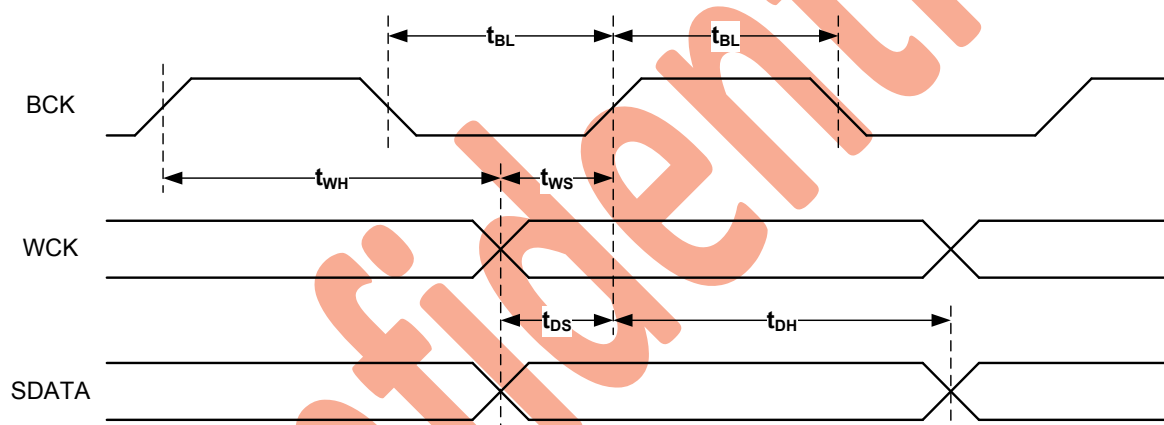


Figure 2. I²S Audio Interface Timing Diagram

10. Functional Description

I²C BUS OF WA20-6829B

The WA20-6829B uses an industry standard Inter IC Control (I²C) bus to communicate with host IC. A host IC can write or read internal registers of the WA20-6829B via the I²C bus.

- General Description of I²C Bus

The I²C bus uses two signal lines – a serial clock line (SCL) and a serial data line (SDA). Because the SDA line is open-drain type port, both the WA20-6829B and a host IC can only drive these pins low or leave them open.

In I²C bus, a master device means the device which generates serial clock on the SCL. A slave device means the device which receives serial clock. There can be many master and slave devices on an I²C bus. But, when one master device works on the bus, the other master devices should not generate signal on the lines. These unexpected interrupts can make other slave devices to fail to communicate with the mater device.

The WA20-6829B supports only slave mode of I²C bus. So, the WA20-6829B always receives serial clock from a host IC. The slave mode is enough to write/read data to/from the WA20-6829B.

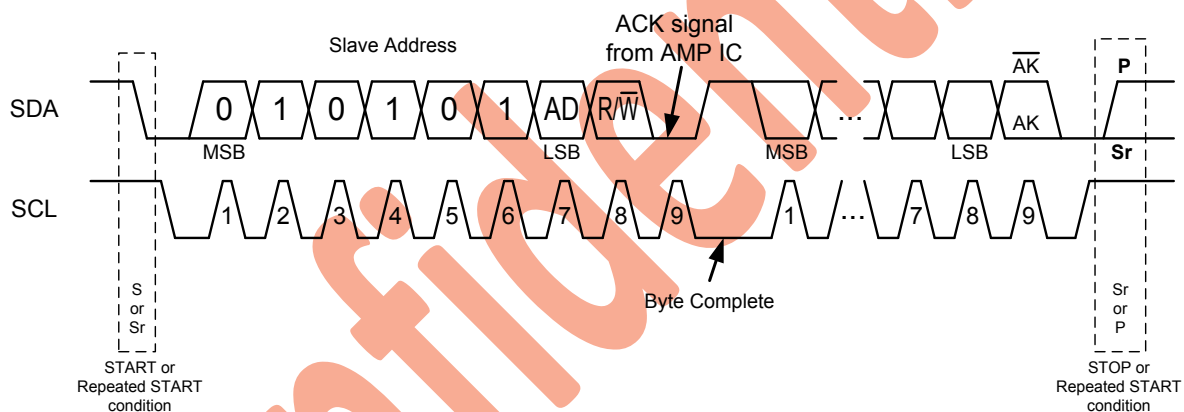


Figure 3. Basic Signaling Elements of I²C Bus

If there is no communication on I²C bus, two signal lines must keep in high state. I²C bus begins communication with the start condition and ends communication with the stop condition. The start condition can be generated by changing the SDA state high to low, during the SCL state remains in high. The stop condition can be generated by changing the SDA state low to high during the SCL remains in high state. Be aware that the stop condition always reset the internal status of I²C bus control logic. Except these two conditions, the SDA may not change during the SCL in high state. Otherwise, abnormal start or stop condition will be generated.

I²C bus transfers the MSB of a byte on 1st data slot and the LSB of a byte on 8th data slot. I²C bus checks success or fail of transfer on every 1 byte transfer. The device which found an expected data on SDA must generate acknowledgement (keep low on SDA) on 9th clock. If there is no acknowledgement on 9th clock, the device which generated a data on SDA may stop transfer. The WA20-6829B will generate acknowledgement for every successful data transfer of 1 byte in write mode. But, in read mode, because data is generated by the WA20-6829B, the WA20-6829B will not generate an acknowledgement. In this case, on the contrary, the WA20-6829B will check SDA state on 9th clock that the master device received a read data properly.

Last 8th bit of the 1st byte is used to indicate whether the master device want to write or read data.

- Writing Operation

When last 8th bit of the 1st byte is set to low state, the writing operation of I²C bus begins. The WA20-6829B supports 3 kinds of writing operations which are presented on Figure 4.

The type presented on Figure 4-(a) is single byte write operation. "Sub Address" on 2nd byte means the internal register address of the WA20-6829B. The "Data" on 3rd byte will be written into the internal register address on "Sub Address". If the stop condition is not generated, writing "Data" on specific "Sub Address" can be repeated like Figure 4-(b). "Data #n" will be written on "Sub Address #n".

The type presented on Figure 4-(c) is single byte write operation under address auto increment mode. The AIF on 1st bit of 2nd byte is the address auto increment flag. If SDA is set to high state on AIF slots, the WA20-6829B writes data continuously with register addresses which are increased from initial "Sub Address" for every byte; "Data #n" will be written on "Sub Address" + n - 1. The internal Address will cycle automatically.

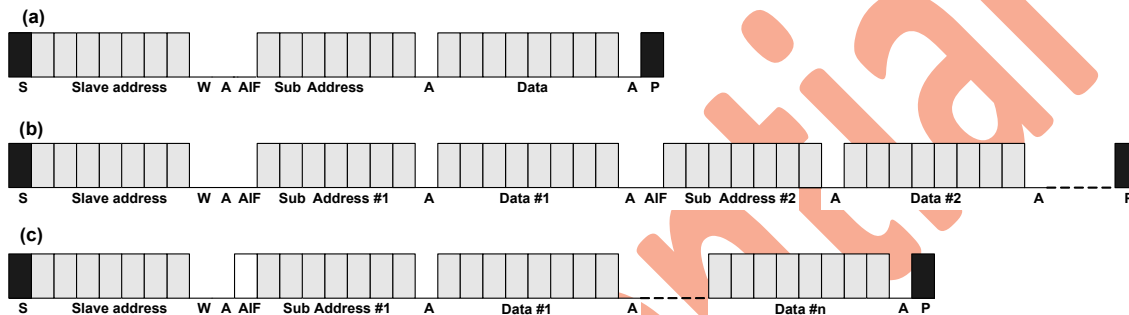


Figure 4. Single Byte Write Mode Sequence

Figure 5-(a), Figure 5-(b), and Figure 5-(c) represent 4 byte writing operations. Coefficient mode Address 0x00~0x79 are used to configure Bi-Quad filter coefficients, those are BQ, QMF_BQ, loudness filter gain, attack gain, power meter gain and PEQ/DRC checksum. The data size of these coefficients and gains is 4 byte for each. The difference between 4byte writing operation and single byte writing operation is only the size of transferring data. So, after sending "Sub Address", 4 sequential bytes must be transferred from the MSB(most significant byte) to the LSB(least significant byte) sequence.

The type presented on Figure 5-(c) is quad byte write operation under Address auto increment mode, AIF function. Please compare the data transfer size between Figure 4 and Figure 5.

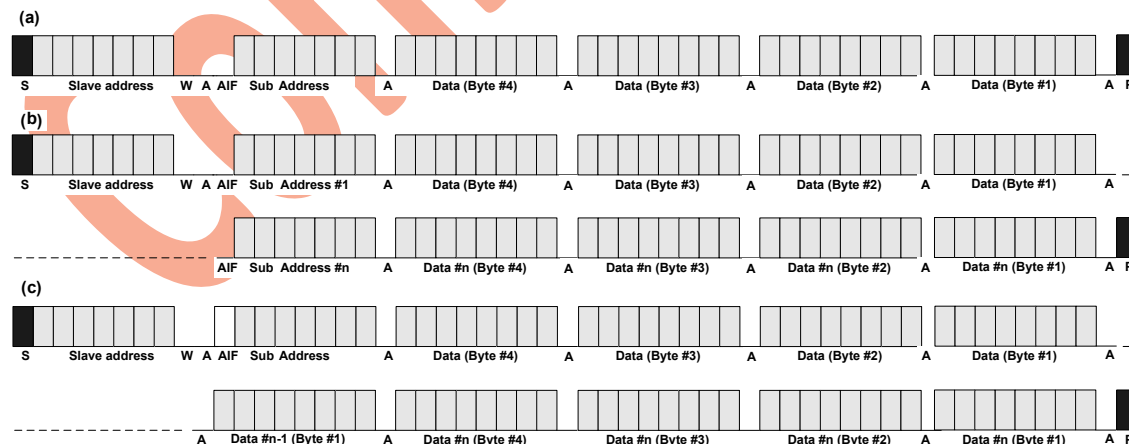


Figure 5. Quad Byte Write Mode Sequence

Each Bi-Quad filter uses 5 coefficients. Any unexpected coefficient value changes on any part of 5

coefficients can generate unstable Bi-Quad filter response. For example, if only one of 5 coefficients for a Bi-quad filter is changed and downloaded, its combined 5-coefficient set can have unstable operation while old and new coefficients are mixed together. Therefore to prevent this kind of problem, the WA20-6829B writes coefficients to coefficient registers only when the last 5th coefficients of each Bi-Quad filter is downloaded, which means all of 5 coefficients are fully ready. Please refer to 9.1 for more detailed operation.

- Reading Operation

Figure 6-(a) represents single byte reading operation from the WA20-6829B. To read data from the WA20-6829B, generate the start condition to start transfer. After then, send "Slave Address" with write mode flag and send the register address(Sub Address). By regenerating the start condition (Sr) again and transferring "Slave Address" with read mode flag, reading operation begins. The WA20-6829B will generate data on SDA signal synchronizing with serial clocks on the SCL. Because the SDA signal is generated from the WA20-6829B, the master device must generate ACK on 9th slot to confirm that the master received 1 byte successfully. However, if this is just one byte reading operation, NAK (not acknowledged) signal must be generated. Then the stop condition must be generated to end transfer. When the AIF is set to high on Sub Address like Figure 6-(b), data will be read continuously with register addresses which are increased from initial "Sub Address" for every byte. To continue reading operation in this case, the master must generate ACK signal on every 9th slot to confirm that the master received 1 byte successfully. Otherwise, reading operation will be terminated. To end Address auto increment reading operation, generate NAK on 9th slot and generate the stop condition.

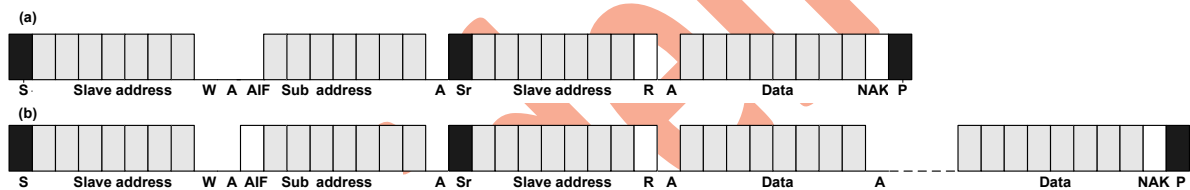


Figure 6. Single Byte Read Mode Sequence

Figure 7 represents quad byte reading operation. The difference between quad byte reading operation and single byte reading operation is only the size of receiving data. So, after sending "Sub Address", 4 sequential bytes must be received from the MSB to the LSB sequence.

The type presented on Figure 7-(b) is quad byte read operation under Address auto increment mode, AIF function. Please compare the data receive size between Figure 6 and Figure 7.

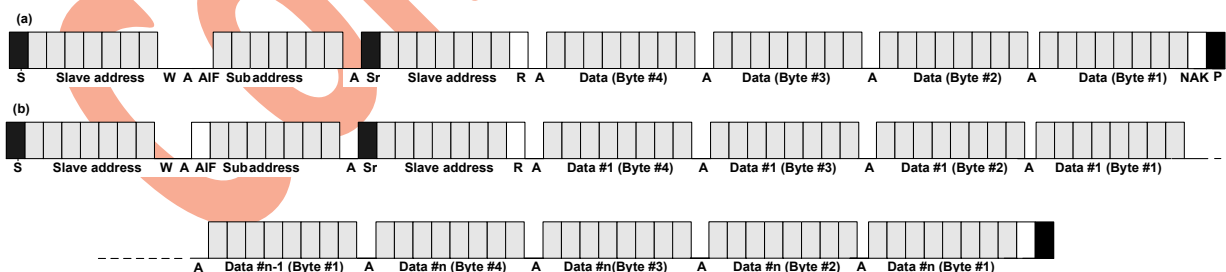


Figure 7. Quad Byte Read Mode Sequence

- I²C Glitch Filter

To clean out the threats of noise in today's high-speed-board system, the WA20-6829B has a glitch elimination filter on the I²C ports. Glitches in the transmission lines of the I²C port can be safely removed with this function. Please refer to the register 0x66.

- I²C Slave Address

The WA20-6829B supports up to four slave addresses. A master device sends the target slave address on the 1st byte. MSB 7 bits of the 1st byte data are used for the slave address. So, four WA20-6829B can be connected to the same MCU at the same time. For multi-chip operation, use the proper I²C slave Address according to AD pin and the initial state of MONITOR_1 pin as shown in Table 1.

<i>Pin Name</i>			
<i>AD</i>	<i>MONITOR_1</i>		
Value	Pull-down ('L')	Pull-up ('H')	No pd / pu (default: 'L')
0	Addr : 0x54	Addr : 0x58	Addr : 0x54
1	Addr : 0x56	Addr : 0x5A	Addr : 0x56

Table 1. I²C Slave Address

CLOCK, RESET & CONTROL

- System Clock

The internal system clock of the WA20-6829B is generated from an external master clock by the on-chip PLL. The WA20-6829B supports external master clock frequency from 2.048 MHz to 24.576MHz. For proper operation, the registers for the PLL should be set correctly according to master clock frequency (Address 0x02).

- Timing Sequence

For proper power up, initialization and power down of WA20-6829B, it is recommend to use the following sequence as shown in Figure 8.

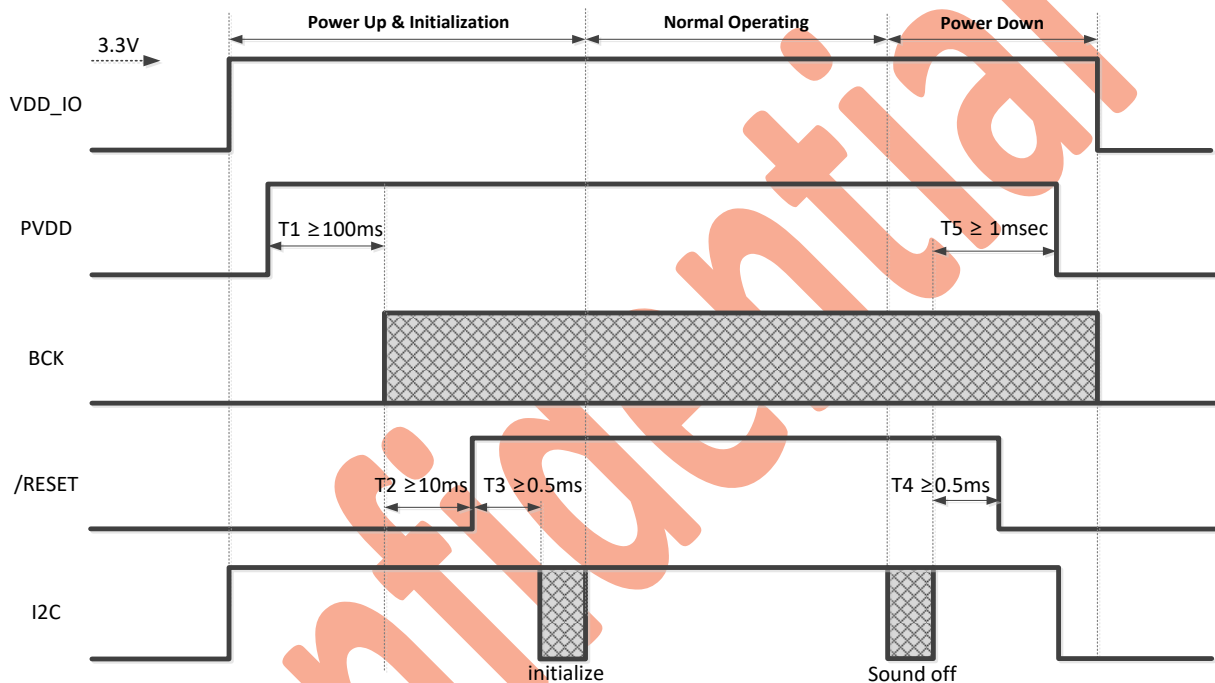


Figure 8. Recommended Timing Sequence

- Power-Up & Initialization Sequence

- 1) Ramp up VDD_IO to at least 3.3V.
- 2) Ramp up PVDD.
- 3) Drive BCK signal at least 100ms after PVDD ($T1 \geq 100\text{msec}$).
- 4) At least 10ms after BCK, Drive /RESET = High ($T2 \geq 10\text{msec}$).
- 5) Wait for at least 0.5msec for I²C communication ($T3 \geq 0.5\text{msec}$) and keep the status.
- 6) Execute both amp initialization sequence (e.g. clock, volume, DRC, PEQ setup) and sound on sequence.

- Power-Down Sequence

- 1) When both DC and AC power are off, make sure to execute sound off sequence.
- 2) Switch /RESET to Low at least 0.5 msec after sound off sequence ($T4 \geq 0.5\text{msec}$).
- 3) Ramp down PVDD at least 1 msec after sound off sequence ($T5 \geq 1\text{msec}$).
- 4) After I²C is Low, ramp down VDD_IO.

- Sound On/Off Sequence

For proper sound on/off of WA20-6829B, use the following sequence as shown in Figure 9.

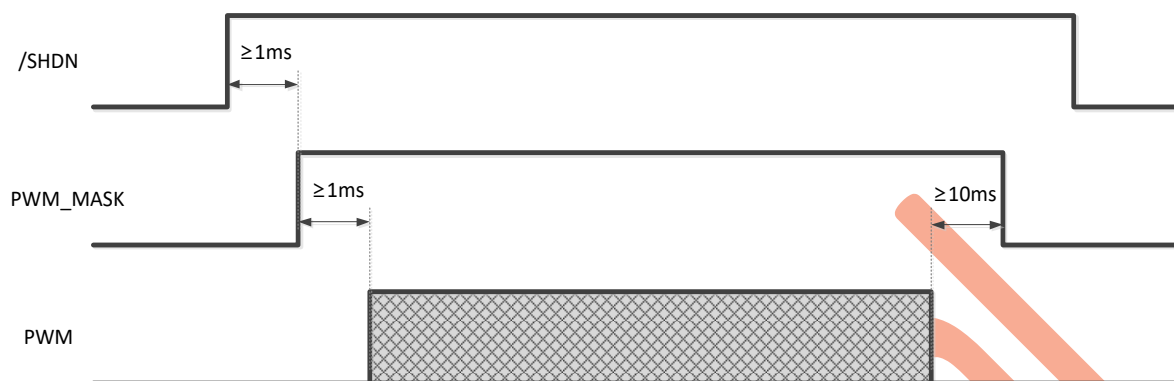


Figure 9. Sound On & Off Sequence

To prevent pop noise when enabling or disabling the amplifier, the above sequences are recommended.

AUDIO INPUT

- I²S

WA20-6829B receives audio data through digital audio interface. There is a standard digital audio interface - the Inter-IC Sound (I²S) Interface.

This interface uses 2 clock lines and 1 data line to receive the audio data. One of these clock lines is WCK. A period of WCK is same with sampling period of audio data i.e. 64bits (32bits for each channel). One of the main functions of WCK to defines the channels, the low state of WCK indicates the 1st channel i.e. left channel and the high state indicates the 2nd channel i.e. right channel. This feature enables the clock receiving device to synchronize the data word-wise for transmitting or receiving from clock generating device.

The other clock line is BCK. This clock line used to synchronize the bit-wise data. The number of clock for one WCK period is 64 clock of BCK. The name of data transfer line is SDATA. The data being synchronized with the BCK must be loaded on this line. WA20-6829B receive data on rising edge of the BCK. The bit range for I²S is predefined.

WA20-6829B can only work as a slave on bus. In slave mode, WA20-6829B receives WCK and BCK from external source. Please refer the following Figure 10.

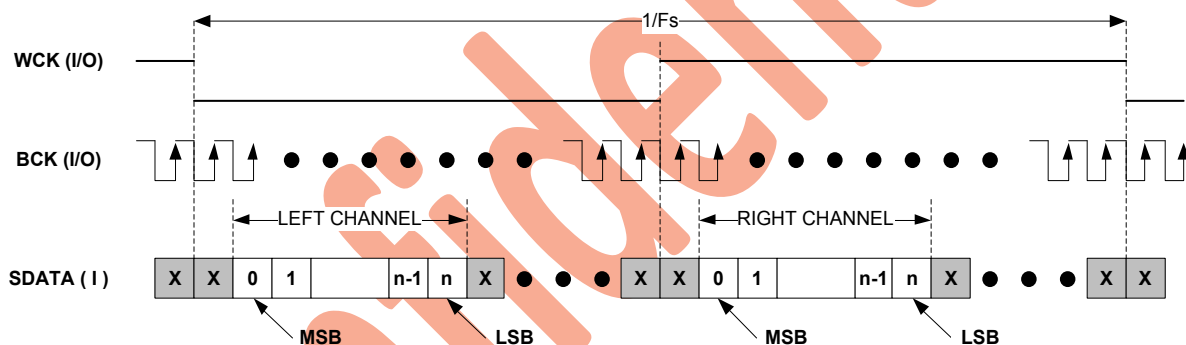


Figure 10. I²S Audio Interface Format

- SDATA Generator

The SDATA generator of WA20-6829B sends I²S out signals. In order for SDATA out process to function stably, the falling of BCK should either synchronize or occur ahead of falling or rising of WCK.

Refer to the register address 0x76 and 0x7C in the Appendix A and refer to the chapter 9. Electrical Characteristics – Audio Interface.

SDATA Generator (Sdata out)	Register Value	
	0x0F	0xF0
Register Address 0x76	Sdata out => Monitor 1 pin	Sdata out => Monitor 2 pin

Table 2. SDATA Generator Control

MIXER

Channel mixer can be used in lots of application needs like pseudo stereo and etc. User can mix input channels into each output channels with designated gains and polarity. Step size of mixer gain is variable according to the gain level as shown below.

Volume Range (dB)	Step (dB)
+18 ~ +6	1
+5.5 ~ -5.5	0.5
-6 ~ -32	1
< -32	-∞

Table 3. Variable Step Mixing Gain

In total, 4 mixing gain coefficients denoted as M00, M01, M10 and M11 are defined as shown in the equation below. Each Mxx stores volume value in dB scale, and the number values versus gain in dB are shown in the Appendix B. By default, each input channel connected to each output channel directly; M00 and M11 are set as 0 dB in plus polarity, M01 and M10 are set as -∞ dB.

$$[\text{Output Channels}] = [\text{Mixer Matrix}] \times [\text{Input Channels}]$$

$$\begin{bmatrix} CH1_OUT \\ CH2_OUT \end{bmatrix} = \begin{bmatrix} M00 & M01 \\ M10 & M11 \end{bmatrix} \cdot \begin{bmatrix} CH1_IN \\ CH2_IN \end{bmatrix}$$

Figure 11. Serial Mixer Matrix

In order to load mixer coefficients into internal memory, send the index value in the gain value table to the register address 0x03~0x06. Each address matched to M00, M01, M10 and M11 sequentially.

PRE-PROCESSING

- Bi-Quad Filter Chain

The Bi-Quad filter means 2nd order IIR filter. WA20-6829B implemented a serial chain of Bi-Quad filters with proprietary floating point operation schemes. The Bi-Quad filter chains can be used in various purposes; loudness control, parametric EQ, loud-speaker EQ, APEQ and etc. The Bi-Quad filter structure is shown in Figure 12.

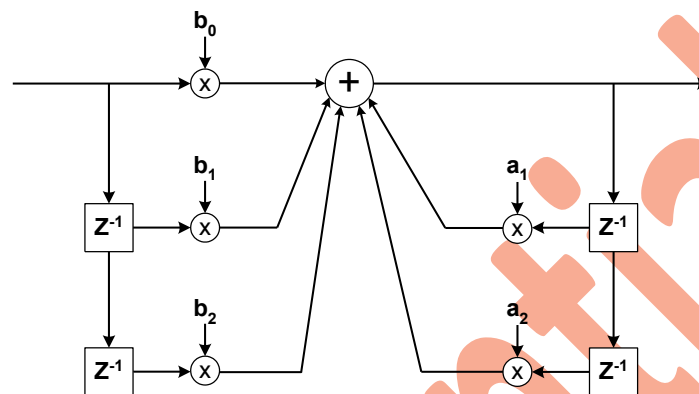


Figure 12. Bi-Quad Filter Structure

Sixteen Bi-Quad filters are linked serially for one channel. The Bi-Quad filters can be configured differently for each filter. As shown in Figure 13, first three filters can be used for loudness control, last six filters for APEQ control.

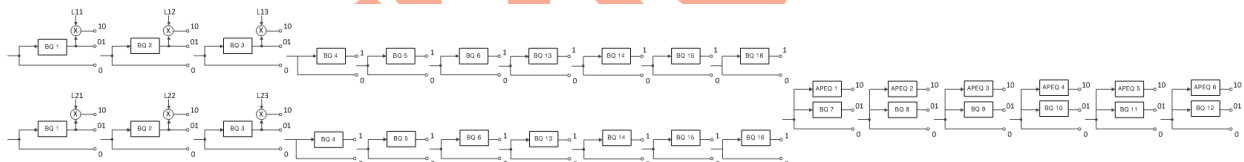


Figure 13. Bi-Quad Filter Chain

Filter coefficients are 32-bit floating point numbers and can be downloaded thru I²C interface. To download Bi-Quad filter coefficients to the WA20-6829B, select download channel by using CH flag in register address 0x7E first. Then, write actual coefficient values to register addresses, from 0x00 to 0x79 in the coefficient register addresses.

The coefficient mode register addresses from 0x00 through 0x04 designate the five coefficients of the first Bi-Quad (BQ1) and represent coefficients b0, b1, b2, a1, a2 respectively. The coefficient mode register addresses from 0x05 through 0x09 designate coefficients of the 2nd Bi-Quad (BQ2) filter, and so on. The enable/disable operation of these Bi-Quad filters can be made by using BQF flag in register addresses of 0x0E~0x15.

Coefficient Mode register	0x00 ~ 0x04	0x05 ~ 0x09	0x0A ~ 0x0E	0x0F ~ 0x13	0x14 ~ 0x18	0x19 ~ 0x1D	
When system address 0x7E = 0x01 0x7E = 0x02	BQ1 of CH1/2	BQ2 of CH1/2	BQ3 of CH1/2	BQ4 of CH1/2	BQ5 of CH1/2	BQ6 of CH1/2	
Coefficient Mode register	0x1E ~ 0x22	0x23 ~ 0x27	0x28 ~ 0x2C	0x2D ~ 0x31	0x50 ~ 0x52	0x5C ~ 0x60	0x61 ~ 0x65
When system address 0x7E = 0x01	BQ7	BQ8	BQ9	BQ10	Loudness Gain	BQ11	BQ12
Coefficient Mode register	0x66 ~ 0x6A	0x6B ~ 0x6F	0x70 ~ 0x74	0x75 ~ 0x79			
When system address 0x7E = 0x01	BQ13	BQ14	BQ15	BQ16			

Coefficient Mode register	0x00 ~ 0x05	0x06 ~ 0x0B	0x0C ~ 0x11	0x12 ~ 0x17	0x1F ~ 0x24
When system address 0x7E = 0x08	Coefficient 0 of APEQ 1 ~ 6	Coefficient 1 of APEQ 1 ~ 6	Coefficient 2 of APEQ 1 ~ 6	Coefficient 3 of APEQ 1 ~ 6	Coefficient 4 of APEQ 1 ~ 6

Table 4. Address of Coefficients for Bi-Quad Filter Chain

- Loudness Control

The WA20-6829B provides loudness control function using coefficient values. Loudness control means the compensation of frequency characteristics in low volume level to fit the acoustic characteristics of human ears. There are 3 gains for loudness control which are applied equally over two channels. To download a loudness gain, the page flag register 0x7E should be set as 0x01.

Loudness Gains of CH1/CH2	Coefficient Mode Register Address		
	0x50	0x51	0x52
Register Address 0x7E= 0x01	L1	L2	L3

Table 5. Address for Loudness Gain

- Advanced Parametric Equalizer

WA20-6829B has a new scheme for APEQ function using coefficient values. APEQ function means the compensation of frequency characteristics based on input signal level to fit the acoustic characteristics of human ears.

APEQ needs a Bi-Quad filter coefficient and five additional coefficients, which comprise a gain coefficient and a threshold coefficient. To download each coefficient, the page flag register 0x7E should be set as same in the case of downloading the filter coefficients. The coefficient values are applied for both channel 1 and 2.

APEQ Coefficient of CH1/CH2	Coefficient Mode Register Address				
	0x00 ~ 0x05	0x06 ~ 0x0B	0x0C ~ 0x11	0x12 ~ 0x17	0x1F ~ 0x24
Register address 0x7E = 0x08 case	Coefficient 0 f(Gain)	Coefficient 1 f(Gain)	Coefficient 2 f(Gain)	Coefficient 3 f(Gain)	Coefficient 4 f(Threshold)

Table 6. Address for APEQ Coefficient

- ReBASS CONTROL

ReBASS enriches the sound of low frequency of audio signal without clipping and distortion. ReBASS is to compensate the characteristics of human loudness perception. For instance, when the volume level is low, the gain of the low frequency band is boosted. On the other hand, when the volume level closes to the maximum, the gain can be minimized to avoid sound clipping. All these scenarios can be set by user by selecting up to four inflection points in the volume-gain curve. While applying the adaptive gain control according to the volume, enhanced bass sound is to be reproduced without sound clipping at the high volume level.

The gain boosting depending on volume level can be changed by rewriting the ReBASS parameter table which consists of 5 volume levels, 5 gain levels, and 4 slopes. In order to access the parameter table, two registers (0x31 and 0x32) are used. The first register (0x31) contains the index of the corresponding parameter, and the second register (0x32) contains the value of the indexed parameter. ReBASS calculates adaptive gains based on the parameter table whenever the volume level is changed.

Confidential

VOLUME & DYNAMIC RANGE CONTROL

Master and channel volumes of the WA20-6829B are independently controlled and softly changed. The register address 0x0C is the master volume control that affects both channels simultaneously and the addresses 0x17 and 0x18 correspond to the channel volume control register for channel 1 and 2 respectively.

The possible maximum Gain is +48.375dB with using master volume fine control, master volume and channel volume because the master volume applies the gain to an input signal independent from a channel volume. However, in such a case, a clipping might occur to prevent a signal overflow error if the magnitude of the input signal is large enough to exceed 0dB under the combined volume setting.

- Master Volume Control

By setting volume control register (Address 0x0C), master volume is controlled from negative infinity through 0dB with selectable step size as follows. For details on the master volume setting, see the register value table shown in Appendix B.

Step	Range
0.5dB	0 ~ -125dB

Table 7. Level Dependent Master Volume Steps

- Channel Volume Control

By setting volume control registers (Address 0x17 and 0x18), channel volumes are independently controlled from negative infinity through +48dB with two selectable step sizes as described below, and in the Appendix B, exact values for channel volume setting are described.

Step	Range
0.5dB	+48 ~ -79dB

Table 8. Level Dependent Channel Volume Steps

- Master Volume Fine Control

Fine control for master volume is possible (+0.125dB step up to maximum +0.375dB boost). Refer the register address 0x16 in the Appendix A.

- Mute and Soft Volume Change

The WA20-6829B enters mute state by setting soft mute flag of register address 0x33. Soft mute is implemented so that the volume gradually increases or decreases when mute is turned off or on respectively. Also the soft mute speed and soft volume change speed rates are programmable. Designers can minimize the pop noise by controlling the soft mute speed and volume change intervals. Refer SM flag of register address 0x33 and SVI flag of register address 0x30.

- Auto Mute

The WA20-6829B can mute the sound automatically when the level of input audio signal is lower than the register-controlled threshold value. The mute can be done by PWM switching with 50 % duty ratio in AD mode or MLP width high in D-BTL mode as shown in Figure 17.

Auto mute is supported for internal channels 1 and 2 after 2x2 mixer block. Refer register address 0x3A.

- Dynamic Range Control

WA20-6829B has a new scheme for dynamic range control, which comprise a high band DRC, a low band DRC, a sub band DRC and a post DRC. The input data is filtered by HPF, LPF and SPF, and then processed by H-DRC, L-DRC and S-DRC respectively. Three processed results are merged and followed by post DRC, which produces the output data with the fully controlled dynamic range. For detailed setting of the DRC registers, please refer to the register addresses in Table 9.

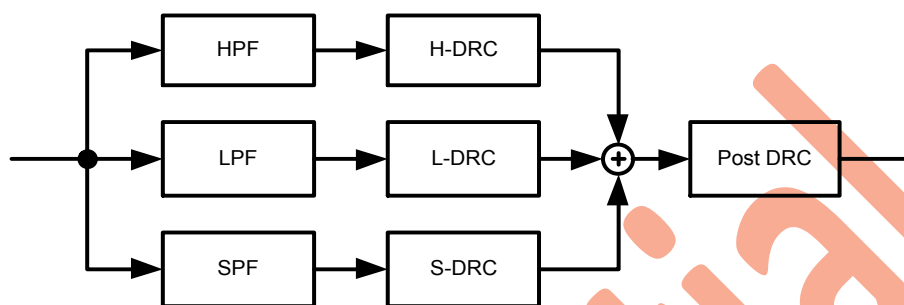


Figure 14. Block Diagram of Dynamic Range Control

3B' DRC Coefficient mode Register	0x32 ~ 0x36	0x37 ~ 0x3B	0x3C ~ 0x40	0x41 ~ 0x45	0x46 ~ 0x4A	0x4B ~ 0x4F
Register Address 0x7E = 0x03	LPF1 of L-DRC	LPF2 of L-DRC	HPF1 of H-DRC	HPF2 of H-DRC	SPF1 of S-DRC	SPF2 of S-DRC

Table 9. Coefficient Register Map for Dynamic Range Control

- Reinforced Sound Dynamic Range Control (RS DRC)

RS DRC controls its gain based on RMS (Root-Mean Square) level detection. When DRC controls its gain according to RMS level detection, the gain transition tends to be more smooth and natural due to the averaging function of RMS level detection. Thus, RS DRC gives more natural sound from the point of human perception of loudness, whereas gain control based on peak level provides tight peak control and better reliability for speakers. Users can freely choose either of the DRC types depending on their needs by setting registers properly in the WA20-6829B.

- Power Meter

The power meter measures the energy of the internally processed signal which is specified through register address 0x2E. And, the measured value can be read through register address 0x2F. (refer to the Table 19. Power Meter Reading Table)

Because audio signals swing very rapidly in process of time, a user can use the power meter gain to get a stable value of energy. The more power meter gain approaches to maximum value, the more value of energy changes slowly.

Power meter gain is 32-bit floating point numbers and can be downloaded through I²C interface. To download power meter gain, page flag register 0x7E should be set 0x01 or 0x03. And then write gain value to coefficient mode address 0x58.

OUTPUT INTERFACE

- Output Configuration

The output of the WA20-6829B has various options. To produce proper output signal, register 0x34, 0x35, 0x3E, 0x3F and 0x43 should be set to appropriate values.

- PWM Output Mapper

Any internal channel that produces a PWM output can be assigned to any PWM output hardware port (or pin) by mapping output port register. This feature is very helpful for the hardware designer because it can relieve difficulties in the power stage signal routing and channel assignment if the output channel order is fixed. See the register address 0x3E and 0x3F in the Appendix A.

- Switching Output Mode

There are two selectable switching output modes in the WA20-6829B. The difference between two output modes lies in the relationship of the relative signal pattern between PWM OUTxA and PWM OUTxB for a channel x. The first one is called as AD mode. This AD mode can be applied to both half bridge and full bridge output stage.

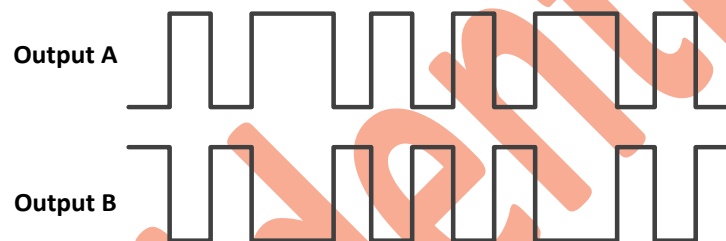


Figure 15. PWM Output Signals in AD Mode

AD asynchronous pair means the normal AD mode PWM output. In other words, A output and B output of each PWM output pair are mutually complementary. In the case of AD synchronous pair, A output and B output are perfectly identical, and its relation is not complementary. This is useful in some special case including single-ended power stage design.

The other one is called as D-BTL mode. This mode is applied only for BTL, and its operation is dynamically-biased BTL, compared to the normal BTL. An example of output signals in D-BTL mode is shown in Figure 16.

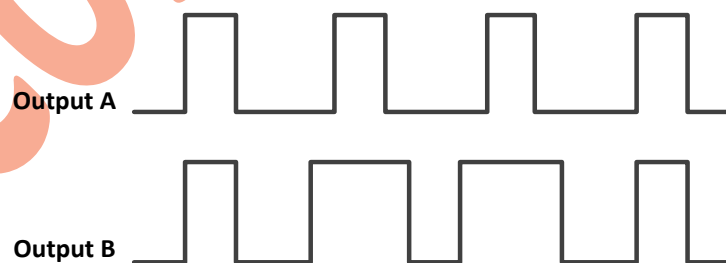


Figure 16. PWM Output Signals in D-BTL Mode

The MLP (Minimum Linear Pulse Length) parameter is an important characteristic in D-BTL mode. MLP defines the minimum pulse length that can guarantee a linear relationship between the input and output pulse length. Generally, the width of the output pulse is proportional to that of the input pulse. However, as the width of input pulse becomes narrower, such linear relation is not maintained due to the characteristic of a power device. The minimum MLP value is preferred as long as linear relationship between the input and the output pulse is satisfied. In addition, in terms of power consumption, a minimal MLP value is preferred.

This compensation is illustrated in Figure 17.

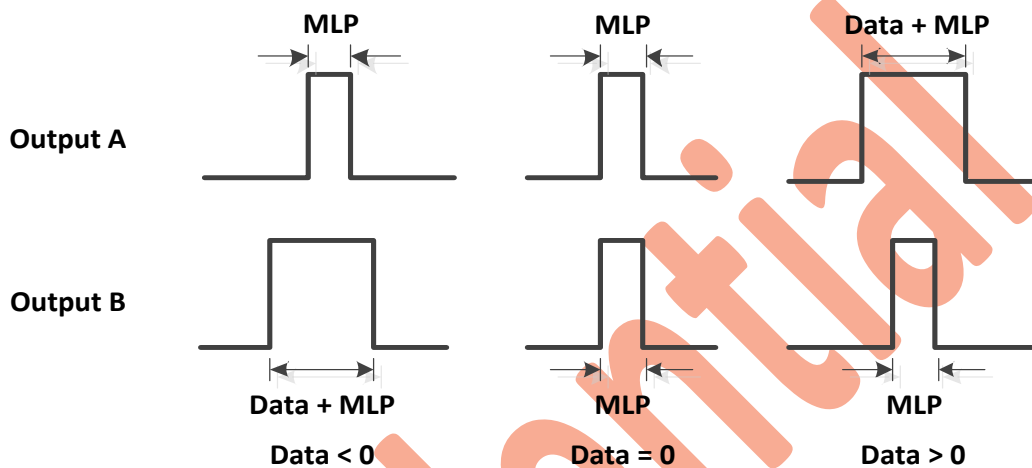


Figure 17. Compensation by MLP

- Soft Start

The soft_start reduces pop noise by controlling rapidly increased energy of PWM in AD mode.

To begin soft_start operation, PWM soft start enable register (address 0x4A: PSE) should be set to high, and then PWM switching on/off register (address 0x34: POF) should be set to low. The duty ratio of PWM output increases from 127:1 (Low:High) to 50:50 (Low:High). Step repeat time register (address 0x4A: SRT) means repeat number of PWM output. Soft_start operation with 17 repetitions is shown in the Figure 18.

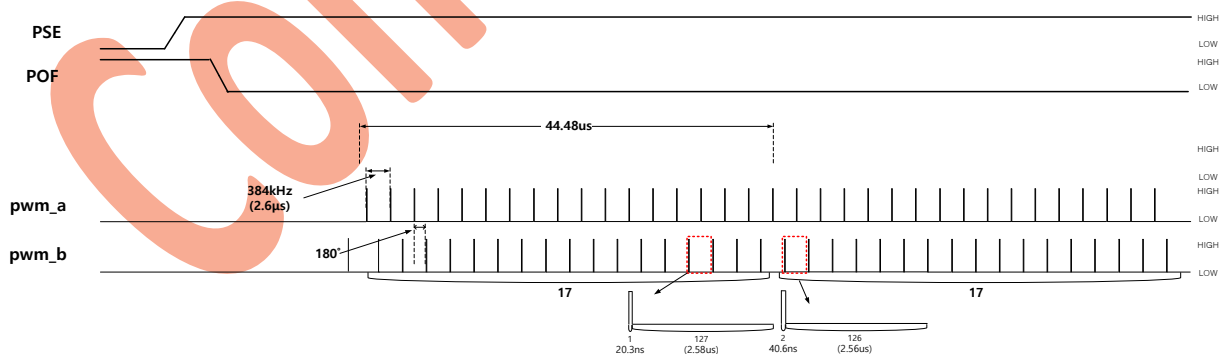


Figure 18. Soft Start Operation Timing

DC PROTECTION

This DC protection block prevents the system from outputting DC signal, which can cause a speaker unit burnt. Three sub functions are employed to prevent DC output, which are monitoring a memory checksum, observing a modulation index, and cutting DC output via hard-wired filters. Except for the hard-wired DC cut filter, the other two blocks only reports the error status, and external MCU may reset the amplifier chip by setting the DC soft reset register to high.

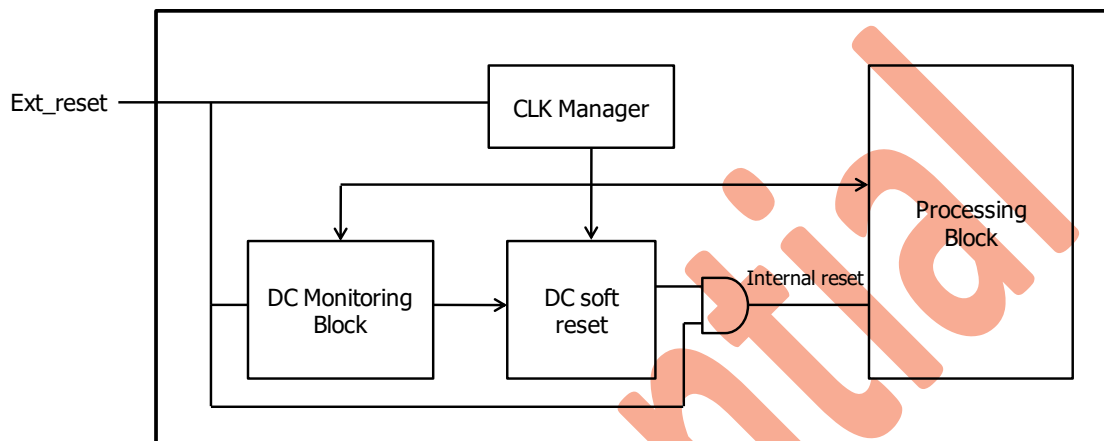


Figure 19. Block Diagram for DC Protection

- Memory Checksum

While initializing the system, the checksum data of coefficients are downloaded from the external MCU from the address 0x53 through 0x5A. This memory checksum block compares the checksum data of current memory block and the checksum data at the initial time. If there happens a discrepancy between two values due to some memory fault, the error flag of address 0x5B is set to high. The external MCU can monitor this error flag and reset the chip by setting the DC soft reset to high at address 0x52. This DC soft reset will initialize the whole chip, and initialization process of the memory should be done thereafter.

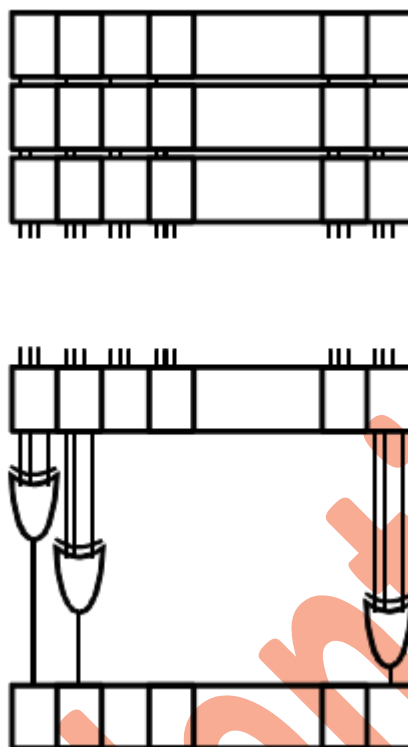


Figure 20. Structure of Memory Checksum


- Modulation Index Check

When there is a DC component in the output, the modulation index tends to stay over or under certain value. The modulation index check block constantly monitors the PWM modulation index, and if the index value continues to stay over or under certain period of time, it sets modulation index error flag of address 0x5B to high. The external MCU can monitor this error flag and reset the chip by setting the DC soft reset the register value of address 0x52 to high. The PWM modulation duty at address 0x51 can be set to decide the level of DC monitoring.


- Hard-wired DC cut

The hard-wired DC cut filters prevent the system from outputting the signal of less than 1Hz frequency. The hard-wired DC cut filters exist in the Bi-Quad filter chain.

11. Application Circuits

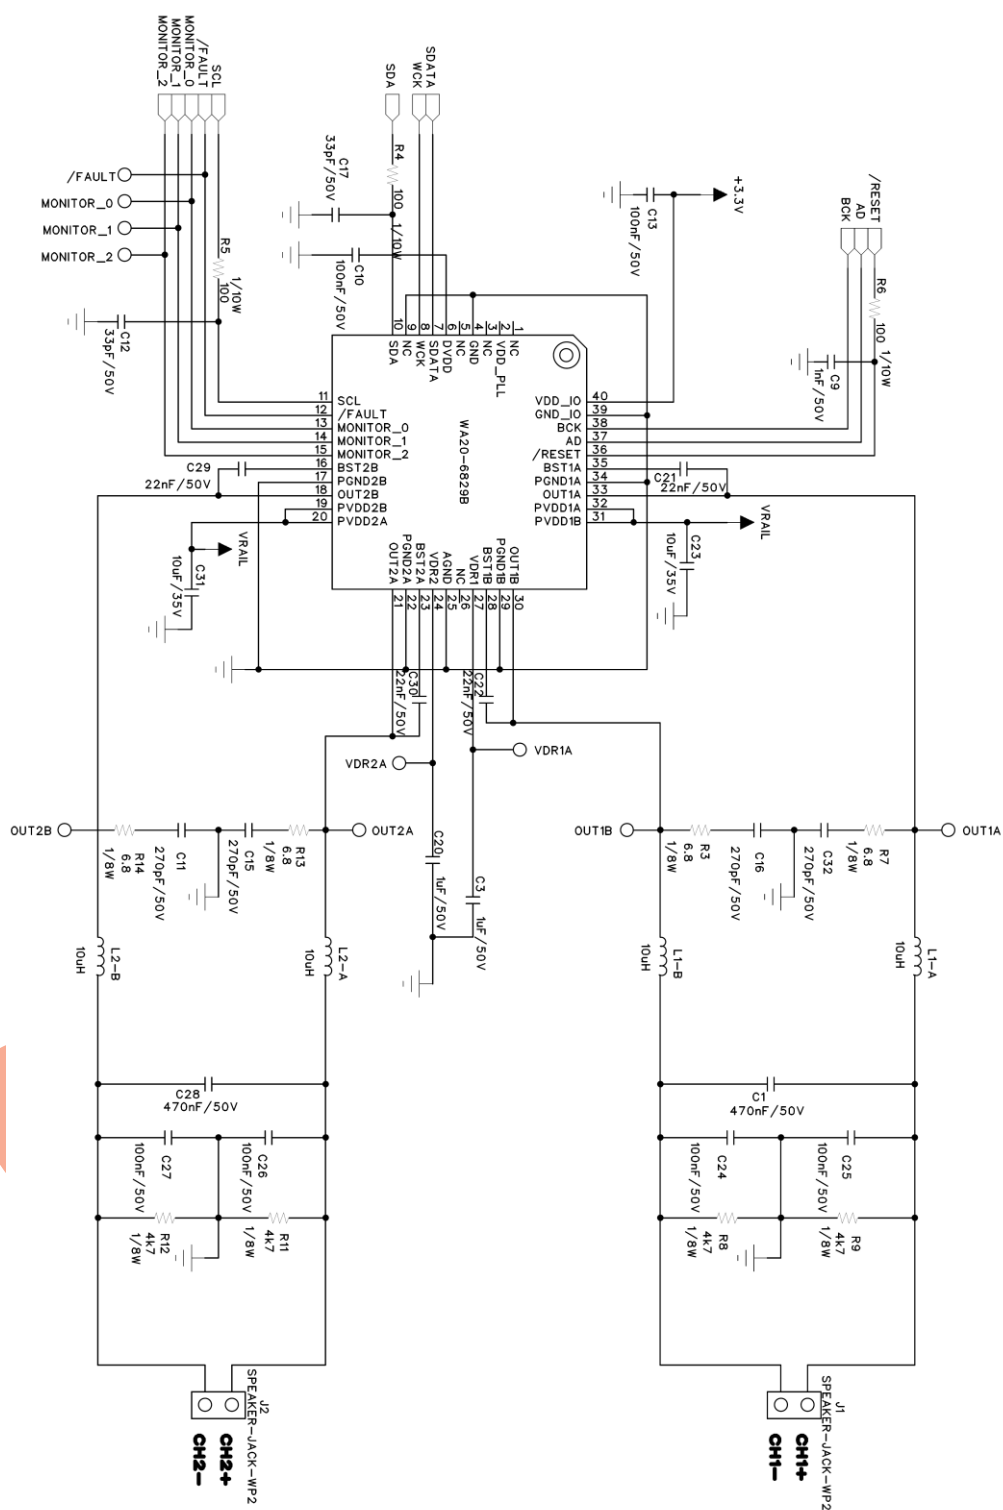

12. Package Outline

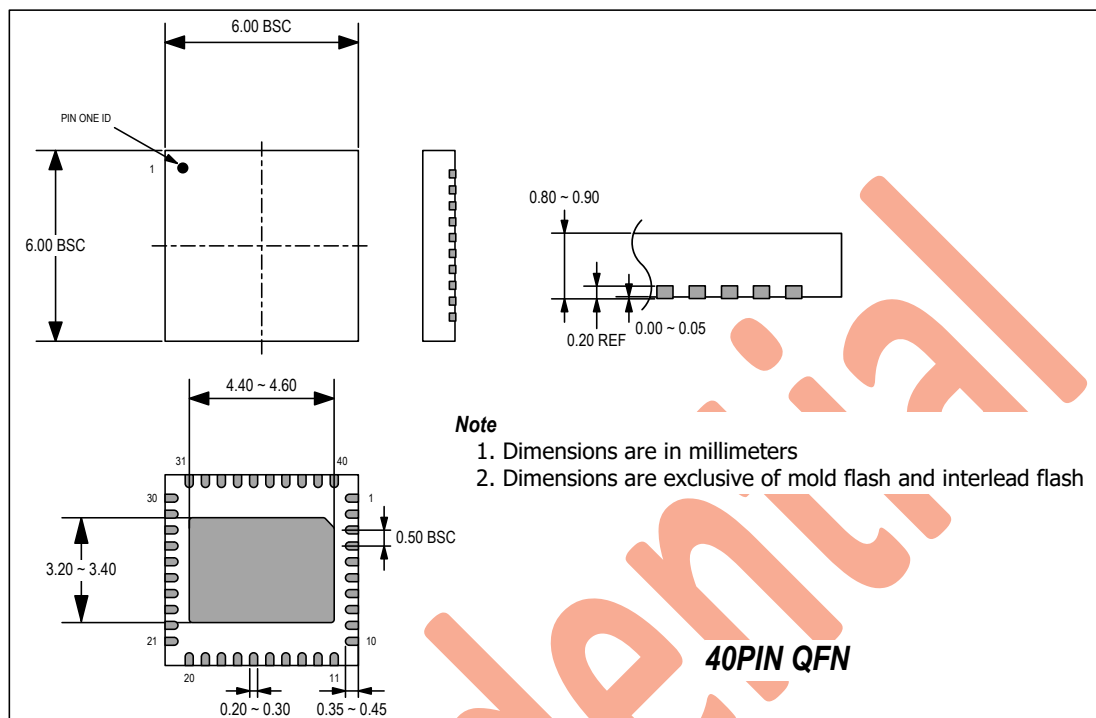

13. Important notices

- This products and its characteristic can be added or changed without notice. Before considering use or application, you'd better consult the Wellang.
- No part of this publication may be reproduced or transmitted or copied in any form or by any means without permission of Wellang.
- Although our product has internal protective circuit, you'd better adopt safety circuits or measures externally to prevent undesired probabilistic device failure.
- Wellang always strives to make a high quality and high reliability products.

14. Contact information

For sales information	snm@wellang.com
For additional information	http://www.wellang.com

15. Appendix

A. Configuration Register Summary

Addr 0x00 : Audio Input Format

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	X	INS

Name	Description	Value	Meaning	Ref.
INS	Input format	b'0	I ² S, slave mode	
		b'1	General serial audio, slave mode	

Addr 0x01 : General Serial Audio Format

Bit	7	6	5	4	3	2	1	0
Name	X	X	BCKS		BS		MLF	LRJ

Name	Description	Value	Meaning	Ref.
LRJ	Serial data justify	b'0	Left justify	
		b'1	Right justify	
MLF	Serial bit order	b'0	MSB first	
		b'1	LSB first	
BS	Serial bit size	b'00	24 bit	
		b'01	20 bit	
		b'10	18 bit	
		b'11	16 bit	
BCKS	Bit clock size select	b'00	64 BCK/WCK	
		b'01	48 BCK/WCK	
		b'10	32 BCK/WCK	

Addr 0x02 : Master Clock Frequency Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	MCF		

Name	Description	Value	Meaning	Ref.
MCF	Master Clock Frequency	b'000	3.072 MHz (WCK 48 kHz) / 2.8224 MHz (WCK 44.1 kHz)	
		b'001	6.144 MHz (WCK 96 kHz)	
		b'010	2.048 MHz (WCK 32 kHz)	

Addr 0x03~0x06 : Mixer Gain

Bit	7	6	5	4	3	2	1	0
Name	X	MG						

Name	Description	Value	Meaning	Ref.
MG	Mixer gain	h'00 ~ h'7E	Mixer gain (refer to gain table)	

$$\begin{bmatrix} mixer_ch1_output \\ mixer_ch2_output \end{bmatrix} = \begin{bmatrix} 0x03 & 0x04 \\ 0x05 & 0x06 \end{bmatrix} \cdot \begin{bmatrix} I2S_ch1_input \\ I2S_ch2_input \end{bmatrix}$$

Mixer equation

$$\begin{bmatrix} mixer_ch1_output \\ mixer_ch2_output \end{bmatrix} = \begin{bmatrix} 0dB(0x4E) & -\infty dB(0x00) \\ -\infty dB(0x00) & 0dB(0x4E) \end{bmatrix} \cdot \begin{bmatrix} I2S_ch1_input \\ I2S_ch2_input \end{bmatrix}$$

Reset default

Addr 0x07 : RS DRC Control 8

Bit	7	6	5	4	3	2	1	0
Name	Post_S	High_S	Low_S	Sub_S	X	X	X	Rel_En

Name	Description	Value	Meaning	Ref.
Rel_En	RS DRC Release Filter Enable	b'0	Bypass	
		b'1	Release Filter Enable (Attack Filter Bypass)	
Sub_S	DRC Ver. Selection for Sub-Band	b'0	Old Version (Peak Detection)	
		b'1	New Version (Vrms Detection)	
Low_S	DRC Ver. Selection for Low-Band	b'0	Old Version (Peak Detection)	
		b'1	New Version (Vrms Detection)	
High_S	DRC Ver. Selection for High-Band	b'0	Old Version (Peak Detection)	
		b'1	New Version (Vrms Detection)	
Post_S	DRC Ver. Selection for Post-Band	b'0	Old Version (Peak Detection)	
		b'1	New Version (Vrms Detection)	

Addr 0x08 : TV Volume

Bit	7	6	5	4	3	2	1	0
Name	X	TV_VOL						

Name	Description	Value	Meaning	Ref.
TV_VOL	Volume of TV-Set	b'0000000 ~ b'1100100	0 ~ 100.	

Reserved Address 0x09 ~ 0x0A

Addr 0x0B : Soft Reset Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	X	Rst

Name	Description	Value	Meaning	Ref.
Rst	Soft Reset	b'0	Normal operation mode	
		b'1	Reset all functions and return to '0' automatically thereafter.	

Addr 0x0C : Master Volume & SPK PWM Switching On/Off Control

Bit	7	6	5	4	3	2	1	0
Name	MVOL						SPOF	

Name	Description	Value	Meaning	Ref.
SPOF	Smart Switching Output on/off Control	b'00000000	PWM off (softmute on → pwm off → pwm_mask low)	
		b'00000001	PWM off (softmute on → pwm off → pwm_mask high)	
		b'00000010	PWM on (softmute on → pwm_mask high → pwm on)	
		b'00000011	PWM on (pwm_mask high → pwm on → softmute off)	
MVOL	Volume control	b'00000100 ~ b'11111111	refer to master volume table. Reset default is 0x00 (= -∞ dB). 0xFF means 0dB with 0.5dB step	

Reserved Address 0x0D

Addr 0x0E~0x0F : PEQ Filter Control 0 for Ch1 and Ch2 respectively

Bit	7	6	5	4	3	2	1	0
Name	X	X	BQ3		BQ2		BQ1	

Name	Description	Value	Meaning	Ref.
BQ1	On/off Bi-Quad 1 of ch. n (n= 1,2)	b'00	Bypass Bi-Quad 1 of channel n	
		b'01	Enable Bi-Quad 1 of channel n	
		b'10	Enable Bi-Quad 1 as Loudness Filter	
BQ2	On/off Bi-Quad 2 of ch. n (n= 1,2)	b'00	Bypass Bi-Quad 2 of channel n	
		b'01	Enable Bi-Quad 2 of channel n	
		b'10	Enable Bi-Quad 2 as Loudness Filter	
BQ3	On/off Bi-Quad 3 of ch. n (n= 1,2)	b'00	Bypass Bi-Quad 3 of channel n	
		b'01	Enable Bi-Quad 3 of channel n	
		b'10	Enable Bi-Quad 3 as Loudness Filter	

Addr 0x10~0x11 : PEQ Filter Control 1 for Ch1, Ch2 respectively

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	BQ6	BQ5	BQ4

Name	Description	Value	Meaning	Ref.
BQ4	On/off Bi-Quad 4 of ch. n (n= 1,2)	b'0	Bypass Bi-Quad 4 of channel n	
		b'1	Enable Bi-Quad 4 of channel n	
BQ5	On/off Bi-Quad 5 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 5 of channel n	
		b'1	Enable Bi-Quad 5 of channel n	
BQ6	On/off Bi-Quad 6 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 6 of channel n	
		b'1	Enable Bi-Quad 6 of channel n	

Addr 0x12~0x13 : APEQ Filter Control 0 for Ch1 and Ch2 respectively

Bit	7	6	5	4	3	2	1	0
Name	BQ10		BQ9		BQ8		BQ7	

Name	Description	Value	Meaning	Ref.
BQ7	On/off Bi-Quad 7 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 7 of channel n	
		b'01	Enable Bi-Quad 7 of channel n	
		b'10	Enable Bi-Quad 7 of channel n as APEQ	
		b'11	Reserved	
BQ8	On/off Bi-Quad 8 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 8 of channel n	
		b'01	Enable Bi-Quad 8 of channel n	
		b'10	Enable Bi-Quad 8 of channel n as APEQ	
		b'11	Reserved	
BQ9	On/off Bi-Quad 9 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 9 of channel n	
		b'01	Enable Bi-Quad 9 of channel n	
		b'10	Enable Bi-Quad 9 of channel n as APEQ	
		b'11	Reserved	
BQ10	On/off Bi-Quad 10 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 10 of channel n	
		b'01	Enable Bi-Quad 10 of channel n	
		b'10	Enable Bi-Quad 10 of channel n as APEQ	
		b'11	Reserved	

Addr 0x14~0x15 : APEQ Filter Control 1 for Ch1 and Ch2 respectively

Bit	7	6	5	4	3	2	1	0
Name	BQ16	BQ15	BQ14	BQ13	BQ12		BQ11	

Name	Description	Value	Meaning	Ref.
BQ11	On/off Bi-Quad 11 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 11 of channel n	
		b'01	Enable Bi-Quad 11 of channel n	
		b'10	Enable Bi-Quad 11 of channel n as APEQ	
		b'11	Reserved	
BQ12	On/off Bi-Quad 12 of ch. n (n = 1,2)	b'00	Bypass Bi-Quad 12 of channel n	
		b'01	Enable Bi-Quad 12 of channel n	
		b'10	Enable Bi-Quad 12 of channel n as APEQ	
		b'11	Reserved	
BQ13	On/off Bi-Quad 13 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 13 of channel n	
		b'1	Enable Bi-Quad 13 of channel n	
BQ14	On/off Bi-Quad 14 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 14 of channel n	
		b'1	Enable Bi-Quad 14 of channel n	
BQ15	On/off Bi-Quad 15 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 15 of channel n	
		b'1	Enable Bi-Quad 15 of channel n	
BQ16	On/off Bi-Quad 16 of ch. n (n = 1,2)	b'0	Bypass Bi-Quad 16 of channel n	
		b'1	Enable Bi-Quad 16 of channel n	

Addr 0x16 : Master Volume Fine Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	MVFC	

Name	Description	Value	Meaning	Ref.
MVFC	Master volume fine control	b'00 ~ b'11	0 dB ~ 0.375 dB with 0.125 dB step	

Addr 0x17~0x18 : Ch1/2 Volume, respectively

Bit	7	6	5	4	3	2	1	0
Name	VOL							

Name	Description	Value	Meaning	Ref.
VOL	Volume control	b'00000000 ~ b'11111111	refer to channel volume table. Reset default is 0x9F (= 0dB). 0xFF means 48dB with 0.5dB step.	

Addr 0x19 : APEQ Path Option

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	OPT		

Name	Description	Value	Meaning	Ref.
Opt	APEQ Path Option	b'000	cut1=>Vol=>PEQ6=>APEQ6=>DRC=>cut2	Set b'000 for APEQ op. (Same effect btw b'000 & b'010)
		b'001	Reserved	
		b'010	cut1=>PEQ6=>Vol=>APEQ6=>DRC=>cut2	
		b'011	Reserved	
		b'100	cut1=>PEQ6=>APEQ6=>Vol=>DRC=>cut2	
		b'101	Reserved	

Addr 0x1A : APEQ Filter Control 2 for APEQ1 (BQ7)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP1			A1C_DP1			

Name	Description	Value	Meaning	Ref.
A1C_DP1	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table below)	
C1C_DP1	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table below)	

Value of Register	Attack time 6dB, fs = 96,000
0011	15msec
0010	8msec
0001	4msec
0000	2msec
0111	1msec
0110	0.5msec
0101	0.25msec
0100	0.125msec
1000	2.5msec
1001	3msec
1010	3.5msec

Table 10. APEQ Attack Time Table

Value of Register	Release time 6dB, fs = 96,000
011	5.0sec
010	2.0sec
001	1.0sec
000	0.5sec
111	0.2sec
110	0.1sec
101	0.05sec
100	0.025sec

Table 11. APEQ Release Time Table

Addr 0x1B : APEQ Filter Control 3 for APEQ2 (BQ8)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP2			A1C_DP2			

Name	Description	Value	Meaning	Ref.
A1C_DP2	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table in Addr 0x1A)	
C1C_DP2	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table in Addr 0x1A)	

Addr 0x1C : APEQ Filter Control 4 for APEQ3 (BQ9)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP3			A1C_DP3			

Name	Description	Value	Meaning	Ref.
A1C_DP3	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table in Addr 0x1A)	
C1C_DP3	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table in Addr 0x1A)	

Addr 0x1D : APEQ Filter Control 5 for APEQ4 (BQ10)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP4			A1C_DP4			

Name	Description	Value	Meaning	Ref.
A1C_DP4	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table in Addr 0x1A)	
C1C_DP4	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table in Addr 0x1A)	

Addr 0x1E : APEQ Filter Control 6 for APEQ5 (BQ11)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP5			A1C_DP5			

Name	Description	Value	Meaning	Ref.
A1C_DP5	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table in Addr 0x1A)	
C1C_DP5	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table in Addr 0x1A)	

Addr 0x1F : APEQ Filter Control 7 for APEQ6 (BQ12)

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_DP6			A1C_DP6			

Name	Description	Value	Meaning	Ref.
A1C_DP6	APEQ attack time	b'0000 ~ b'1010	Attack time control (refer to APEQ attack time table in Addr 0x1A)	
C1C_DP6	APEQ release time	b'000 ~ b'111	Release time control (refer to APEQ release time table in Addr 0x1A)	

Addr 0x20 : DRC Control 0

Bit	7	6	5	4	3	2	1	0
Name	CPR_L	CTS_L						

Name	Description	Value	Meaning	Ref.
CTS_L	DRC threshold for Low band	b'0000000 ~ b'1111111	-57 ~ 12dB unsigned 7-bit DRC threshold for 1 band mode. In 2 band mode, It will control the threshold of low band. Refer to DRC threshold table for threshold values.	
CPR_L	DRC enable for Low band	b'0	Dynamic Range Compression off	
		b'1	Dynamic Range Compression on	

Addr 0x21 : DRC Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_L			A1C_L			

Name	Description	Value	Meaning	Ref.
A1C_L	DRC attack time (Low band)	b'0000 ~ b'1010	Attack time control for 1 band mode. In 2 band mode, it will control the attack time of low band. (refer to DRC attack time table below) default = b'0001	
C1C_L	DRC release time (Low band)	b'000 ~ b'111	Release time control for 1 band mode. In 2 band mode, it will control the release time of low band. (refer to DRC release time table below)	

Value of Register	Attack time 6dB, fs = 96,000
0011	30msec
0010	15msec
0001	8msec
0000	4msec
0111	2msec
0110	1msec
0101	0.5msec
0100	0.25msec
1000	5msec
1001	6msec
1010	7msec

Table 12. DRC Attack Time Table

Value of Register	Release time 6dB, fs = 96,000
011	5.0sec
010	2.0sec
001	1.0sec
000	0.5sec
111	0.2sec
110	0.1sec
101	0.05sec
100	0.025sec

Table 13. DRC Release Time Table

Addr 0x22 : DRC Control 2

Bit	7	6	5	4	3	2	1	0
Name	CPR_H	CTS_H						

Name	Description	Value	Meaning	Ref.
CTS_H	DRC threshold for High band	b'0000000 ~ b'1111111	-57 ~ 12dB unsigned 7-bit DRC threshold for high band. It has effect only in 2 band mode. Refer to DRC threshold value table for threshold values.	
CPR_H	DRC enable for High band	b'0	Dynamic Range Compression off	
		b'1	Dynamic Range Compression on	

Addr 0x23 : DRC Control 3

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_H			A1C_H			

Name	Description	Value	Meaning	Ref.
A1C_H	DRC attack time (High band)	b'0000 ~ b'1010	Attack time control for high band mode. It has effect only in 2 band mode. (See DRC attack time table in Addr 0x21) default = b'0001	
C1C_H	DRC release time (High band)	b'000 ~ b'111	Release time control for high band mode. It has effect only in 2 band mode. (refer to DRC release time table in Addr 0x21)	

Addr 0x24 : RS DRC Control 0

Bit	7	6	5	4	3	2	1	0
Name	RS_EN	X	X	X	X	X	X	X

Name	Description	Value	Meaning	Ref.
RS_EN	RS DRC Enable	b'0	Disable RS DRC	
		b'1	Enable RS DRC	

Addr 0x25 : RS DRC Control 1

Bit	7	6	5	4	3	2	1	0
Name	Period_L(7:0)							

Name	Description	Value	Meaning	Ref.
Period_L	Vrms Period for Low-Band	h'0A	Period of Vrms calculation for High-Band. Roughly, the step between 1 and 10 is 0.1ms, and between 11 and 127 is 0.7ms. Over 128 is meaningless. Ex) 0x28 represents about 22ms. (22ms = 0.1ms*10 + 0.7ms*30)	

Addr 0x26 : DRC Control 6

Bit	7	6	5	4	3	2	1	0
Name	CPR_P	CTS_P						

Name	Description	Value	Meaning	Ref.
CTS_P	DRC threshold for Post band	b'0000000 ~ b'1111111	-57 ~ 12dB unsigned 7-bit DRC threshold Refer to DRC threshold table.	
CPR_P	DRC enable for Post band	b'0	Dynamic Range Compression off	
		b'1	Dynamic Range Compression on	

Addr 0x27 : DRC Control 7

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_P			A1C_P			

Name	Description	Value	Meaning	Ref.
A1C_P	DRC attack time (Post band)	b'0000 ~ b'1010	Attack time control (refer to DRC attack time table in Addr 0x21) default = b'0001	
C1C_P	DRC release time (Post band)	b'000 ~ b'111	Release time control (refer to DRC release time table in Addr 0x21) default = b'100	

Addr 0x28 : DRC Control 8

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	DLL				

Name	Description	Value	Meaning	Ref.
DLL	Delay line length	b'000000~ b'10100	Delay line length. 0~20(decimal)	

Addr 0x29 : DRC Control 9

Bit	7	6	5	4	3	2	1	0
Name	CCO	DTS1	DTS2	2BM	X	X	X	CAS

Name	Description	Value	Meaning	Ref.
CAS	Coupled All pass Structure enable	b'0	Enable coupled all pass structure	
		b'1	Disable coupled all pass structure	
2BM	2band mode enable	b'0	1 band DRC	
		b'1	2 band DRC	
DTS2	P-DRC type select	b'0	P-DRC new mode	
		b'1	P-DRC old mode	
DTS1	LH-DRC type select	b'0	LH-DRC new mode	
		b'1	LH-DRC old mode	
CCO	Clip control option	b'0	Clip off	
		b'1	Clip on	

Addr 0x2A : DRC Control 10

Bit	7	6	5	4	3	2	1	0
Name	CPR_S	CTS_S						

Name	Description	Value	Meaning	Ref.
CTS_S	DRC threshold for Sub band	b'0000000	-57 ~ 12dB unsigned 7-bit DRC threshold for Sub band.	
		b'1111111	It has effect only in 3 band mode. Refer to DRC threshold table for threshold values. default= b'1101010	
CPR_S	DRC enable for Sub band	b'0	Dynamic Range Compression off	
		b'1	Dynamic Range Compression on	

Addr 0x2B : DRC Control 11

Bit	7	6	5	4	3	2	1	0
Name	X	C1C_S			A1C_S			

Name	Description	Value	Meaning	Ref.
A1C_S	DRC attack time (Sub band)	b'0000 ~ b'1010	Attack time control for sub band mode. It has effect only in 3 band mode. (Refer to DRC attack time table in Addr 0x21.) default = b'0001	
C1C_S	DRC release time (Sub band)	b'000 ~ b'111	Release time control for sub band mode. It has effect only in 3 band mode. (refer to DRC release time table in Addr 0x21.)	

Addr 0x2C : DRC Control 12

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	DTS3	SBM

Name	Description	Value	Meaning	Ref.
SBM	Sub band mode enable	b'0	Sub band mode Disable	
		b'1	Sub band mode Enable	
DTS3	Sub DRC type select	b'0	Sub DRC new mode	
		b'1	Sub DRC old mode	

Addr 0x2D : Threshold Table Mapping Coefficient for RS DRC

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	COEF_SEL				

Name	Description	Value	Meaning	Ref.
COEF_SEL	Threshold Table Mapping	d'10	Default Value : 10 (= 2.0) The range is between 0 and 20, and the step unit is 0.1. For example, 0x0F means 2.5.	

Addr 0x2E : Power Meter Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	PDPOS	X	X	PDCH	

Name	Description	Value	Meaning	Ref.
PDCH	Power meter Detect Channel	b'00	L+R (default)	
		b'01	L channel	
		b'10	R channel	
PDPOS	Power meter Detect Position	b'0	After volume (default)	
		b'1	Before volume (from digital input)	

Addr 0x2F : Power Meter (read only)

Bit	7	6	5	4	3	2	1	0
Name	Power meter							

Addr 0x30 : Soft Volume Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	SVI	

Name	Description	Value	Meaning	Ref.
SVI	Soft volume change	b'00	Medium speed	
		b'01	High speed	
		b'10	Low speed	
		b'11	soft volume change disable	

Addr 0x31 : ReBASS Parameter Selection

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	P_SEL			

Name	Description	Value	Meaning	Ref.
P_SEL	Volume Parameters	0x00	Volume0	Before writing values at the register of 0x32, the relevant parameters in P_SEL should be written.
		0x01	Volume1	
		0x02	Volume2	
		0x03	Volume3	
		0x04	Volume4	
	Gain Parameters	0x05	Gain0 (dB)	
		0x06	Gain1 (dB)	
		0x07	Gain2 (dB)	
		0x08	Gain3 (dB)	
		0x09	Gain4 (dB)	
	Slope Parameters	0x0A	$\text{Slope0} = (\text{Gain1} - \text{Gain0}) / (\text{Vol1} - \text{Vol0})$	
		0x0B	$\text{Slope1} = (\text{Gain2} - \text{Gain1}) / (\text{Vol2} - \text{Vol1})$	
		0x0C	$\text{Slope2} = (\text{Gain3} - \text{Gain2}) / (\text{Vol3} - \text{Vol2})$	
		0x0D	$\text{Slope3} = (\text{Gain4} - \text{Gain3}) / (\text{Vol4} - \text{Vol3})$	

Addr 0x32 : ReBASS Parameter Value

Bit	7	6	5	4	3	2	1	0
Name	P_VAL							

Name	Description	Value	Meaning	Ref.
P_VAL	Volume	0 ~ 100	Set volume of each inflection point. The relevant point should be selected in the 0x31 register as one of 0x0 ~ 0x4.	Up to four inflection points can set, and its relevant selection, P_SEL, in the 0x31 register should be properly written before writing P_VAL
	Gain (dB)	0 ~ 90	Set gain of each inflection point. The relevant point should be selected in the 0x31 register as one of 0x5 ~ 0x9.	
	Slope (dB)	0x00 ~ 0xFF	Set slope value between adjacent inflection points. The relevant interval should be selected in the 0x31 register as one of 0xA ~ 0xD. (Data format is sx.xxxxxx. e.g. for the slope value of -1, the relevant register value is 11000000 _b)	

Default ReBASS Parameters

Volume	Gain (dB)	Slope
10	15	0xDA
20	9	0xFA
50	6	0xF6
80	1	0xFD
100	0	-

Addr 0x33 : Soft Mute Control

Bit	7	6	5	4	3	2	1	0
Name	SMH	X	X	X	X	X	SM2	SM1

Name	Description	Value	Meaning	Ref.
SMn	Soft mute	b'0	increase for channel n	
		b'1	decrease for channel n	
SMH	Soft Mute Change speed	b'0	42/46 msec (at 96/88.2kHz)	
		b'1	Hard change	

Addr 0x34 : PWM Switching On/Off Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	POF2	POF1

Name	Description	Value	Meaning	Ref.
POFn	Switching output On/off control	b'0	Channel n PWM switching on	
		b'1	Channel n PWM switching off	

Addr 0x35 : PWM_MASK Control 0

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	SRD	FPMLD	PWMM	

Name	Description	Value	Meaning	Ref.
PWMM	PWM MASK register	b'10	PWM MASK output is low.	
		Otherwise	PWM MASK output is high.	
FPMLD	Permanent PWM_MASK Low disable flag	b'0	No effect	
		b'1	Reset the Auto PWM_MASK restore counter to 0	
SRD	FAULT disable	b'0	FAULT is effective for PROTECT	
		b'1	FAULT is ineffective for PROTECT	

Addr 0x36 : PWM_MASK Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	APM	POF

Name	Description	Value	Meaning	Ref.
POF	PWM off flag	b'0	Even if Auto PWM_MASK condition is met, the PWM output of all channels is not affected.	
		b'1	When Auto PWM_MASK condition is met, the PWM output of all channels goes to the defined state which is set by the PWM off state control registers (Addr 0x37 & 0x6F).	
APM	PWM_MASK flag	b'0	Even if Auto PWM_MASK condition is met, the PWM_MASK output of all channels is not affected.	
		b'1	When Auto PWM_MASK condition is met, the PWM_MASK output goes to Low state.	

Addr 0x37 : PWM_MASK Control 2

Bit	7	6	5	4	3	2	1	0
Name	X	VMSK2	VMSK1	VMSK0	X	PMSK2	PMSK1	PMSK0

Name	Description	Value	Meaning	Ref.
PMSKn	Masking bit of PWM off control	b'0	Mask bit indicating the validity of n-th bit of Addr 0x75 system register: If the n-th bit of this register is zero, the n-th bit of Addr 0x75 system register is invalid. The n-th bit of Addr 0x75 is valid only when the n-th mask bit is one.	
		b'1		
VMSKn	Masking bit of PWM_MASK signal	b'0		
		b'1		

Addr 0x38 : PWM_MASK Control 3

Bit	7	6	5	4	3	2	1	0
Name	IRC		AVRCT			PHT		

Name	Description	Value	Meaning	Ref.
PHT	PWM_MASK Low Hold Time	b'000	0.5 msec Hold Time	
		b'001	1 msec Hold Time	
		b'010	2 msec Hold Time	
		b'011	4 msec Hold Time (Default)	
		b'100	8 msec Hold Time	
		b'101	16msec Hold Time	
AVRCT	Auto PWM_MASK Restore Counter Threshold	b'000	2	
		b'001	5 (Default)	
		b'010	10	
		b'011	15	
		b'100	20	
		b'101	25	
		b'110	30	
		b'111	Infinity	
IRC	Auto PWM_MASK	b'00	2 (Default)	
	Restore Interval Ratio Control	b'01	4	

Addr 0x39 : PWM_MASK Control 4

Bit	7	6	5	4	3	2	1	0
Name	SHE	POE	X	X	X	HT2		

Name	Description	Value	Meaning	Ref.
HT2	Hold Time 2 apply start point (restore counter)	b'000	100 msec Hold Time	
		b'001	200 msec Hold Time	
		b'010	400 msec Hold Time	
		b'011	600 msec Hold Time (Default)	
		b'100	800 msec Hold Time	
		b'101	1 sec Hold Time	
		b'110	2 sec Hold Time	
		b'111	4 sec Hold Time	
POE	PWM off when PWM_MASK off and PWM on when PWM_MASK recovers	b'0	Disable	
		b'1	Enable (Default)	
SHE	Second Hold time Enable	b'0	Disable	
		b'1	Enable	

Addr 0x3A : Auto-Mute Control for CH1 & CH2

Bit	7	6	5	4	3	2	1	0
Name	X	EAMC	II		AT			

Name	Description	Value	Meaning	Ref.
AT	Auto-mute detection threshold	b'0000 ~ b'1111	Unsigned integer between 0 and 15 Refer to Auto Mute detection threshold table for threshold values.	
II	Auto-mute response time	b'00	5 msec	
		b'01	50 msec	
		b'10	500 msec	
		b'11	2 sec	
EAMC	Effect of Auto-mute condition	b'0	Auto mute disable (No-Effect)	
		b'1	Stop PWM switching when auto-mute condition is met.	

Reserved Address 0x3B**Addr 0x3C : CH1&CH2 Prescaler Value Control**

Bit	7	6	5	4	3	2	1	0
Name	PS12							

Name	Description	Value	Meaning	Ref.
PS12	Prescaler value	b'00000000 ~ b'11111111	default = 0x4C	

Addr 0x3D : WCK Synchronization Control

Bit	7	6	5	4	3	2	1	0
Name	Syn_En	X	X	X	X	X	X	X

Name	Description	Value	Meaning	Ref.
Syn_En	WCK	b'0	Disable	
	Synchronization	b'1	Enable	

Addr 0x3E : PWM Output Port Control for PWM Port 1A & 1B

Bit	7	6	5	4	3	2	1	0
Name	X	X	OPM1B			OPM1A		

Name	Description	Value	Meaning	Ref.
OPM1A	Select source channel for PWM output port 1A	b'000	PWM1A is connected to PWM port 1A	
		b'001	PWM1B is connected to PWM port 1A	
		b'010	PWM2A is connected to PWM port 1A	
		b'011	PWM2B is connected to PWM port 1A	
OPM1B	Select source channel for PWM output port 1B	b'000	PWM1A is connected to PWM port 1B	
		b'001	PWM1B is connected to PWM port 1B	
		b'010	PWM2A is connected to PWM port 1B	
		b'011	PWM2B is connected to PWM port 1B	

Addr 0x3F : PWM Output Port Control for PWM Port 2A & 2B

Bit	7	6	5	4	3	2	1	0
Name	X	X	OPM2B			OPM2A		

Name	Description	Value	Meaning	Ref.
OPM2A	Select source channel for PWM output port 2A	b'000	PWM1A is connected to PWM port 2A	
		b'001	PWM1B is connected to PWM port 2A	
		b'010	PWM2A is connected to PWM port 2A	
		b'011	PWM2B is connected to PWM port 2A	
OPM2B	Select source channel for PWM output port 2B	b'000	PWM1A is connected to PWM port 2B	
		b'001	PWM1B is connected to PWM port 2B	
		b'010	PWM2A is connected to PWM port 2B	
		b'011	PWM2B is connected to PWM port 2B	

Addr 0x40 : NS Soft Mute Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	Time_Lim	Enable	CNT_THR			

Name	Description	Value	Meaning	Ref.
CNT_THR	Minimum counting value	b'0000~ b'1111	Minimum counting value of continuous zeros for forcing NS_OUT as 0. default = b'0110	
Enable	Enable NS soft mute	b'0	Disable	
		b'1	Enable	
Time_Lim	Time limit on finding continuous zeros	b'0	Time Limit = 200ms	
		b'1	Time Limit = 400ms	

Addr 0x41 : Modulation Index & NS-Type Control

Bit	7	6	5	4	3	2	1	0
Name	X	M0		FB	X	NTF_Order	MD12	

Name	Description	Value	Meaning	Ref.
MD12	Modulation index control by Minimum pulse width for Ch 1&2	b'00	Minimum pulse width = 80 ns	
		b'01	Minimum pulse width = 60 ns	
		b'10	Minimum pulse width = 40 ns	
		b'11	Minimum pulse width = 20 ns	
NTF_Order	Select NTF Order	b'0	NTF Order = 4	
		b'1	NTF Order = 5	
FB	Feed Back on/off	b'0	NS Feed Back off	
		b'1	NS Feed Back on	
M0	Dither Position Selector	b'00	No left shift on dither value = Dither off	
		b'01	1bit left shift on dither value	
		b'10	2bit left shift on dither value	
		b'11	3bit left shift on dither value	

Addr 0x42 : NS Feedback Limit

Bit	7	6	5	4	3	2	1	0
Name	X	FBMAX						

Name	Description	Value	Meaning	Ref.
FBMAX	Feedback on/off	b'0000000 ~b'1111111	Feedback limit, default = 0x04	

Addr 0x43 : Miscellaneous PWM Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	BHL	AHL	MD	

Name	Description	Value	Meaning	Ref.
MD	PWM output mode	b'00	AD mode with asynchronous signal pair	
		b'01	AD mode with synchronous signal pair	
		b'10	PWM D-BTL MODE (see 0x45)	
AHL	A-out state When switching off	b'0	Low	
		b'1	High	
BHL	B-out state when switching off	b'0	Low	
		b'1	High	

Addr 0x44 : PWM D-BTL MODE Control 0

Bit	7	6	5	4	3	2	1	0
Name	X	MLP						

Name	Description	Value	Meaning	Ref.
MLP	Minimum Linear pulse length	b'0001110	Unsigned 0~64	

Addr 0x45 : PWM D-BTL MODE Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	NSS	

Name	Description	Value	Meaning	Ref.
NSS	NS Select	b'00	7bits NS (AD mode)	
		b'01	Reserved	
		b'10	8bits NS	
		b'11	New 8bits NS (D-BTL mode)	

Reserved Address 0x46 ~ 0x49

Addr 0x4A : Soft Start Control 0

Bit	7	6	5	4	3	2	1	0
Name	PSE	SRT						

Name	Description	Value	Meaning	Ref.
SRT	Step Repeat Time	b'000000 ~b'11111 1	Repeat time of each step (default = b'0010000 – means repeat 17 times)	
PSE	PWM soft start	b'0	Disable	
	Enable	b'1	Enable (only under AD mode)	

Addr 0x4B : Soft Start Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	MP_PD	

Name	Description	Value	Meaning	Ref.
MP_PD	Soft start minimum pulse of Power device	b'00	First pulse width = 20 ns	
		b'01	First pulse width = 40 ns	
		b'10	First pulse width = 60 ns	
		b'11	First pulse width = 80 ns	

Reserved Address 0x4C

Addr 0x4D : RS DRC Control 5

Bit	7	6	5	4	3	2	1	0
Name	Period_H (7:0)							

Name	Description	Value	Meaning	Ref.
Period_H	Vrms Period for High-Band	h'0A	Period of Vrms calculation for High-Band. Roughly, the step between 1 and 10 is 0.1ms, and between 11 and 127 is 0.7ms. Over 128 is meaningless. Ex) 0x28 represents about 22ms. (22ms = 0.1ms*10 + 0.7ms*30)	

Addr 0x4E : RS DRC Control 6

Bit	7	6	5	4	3	2	1	0
Name	Period_S (7:0)							

Name	Description	Value	Meaning	Ref.
Period_S	Vrms Period for Sub-Band	h'0A	Period of Vrms calculation for High-Band. Roughly, the step between 1 and 10 is 0.1ms, and between 11 and 127 is 0.7ms. Over 128 is meaningless. Ex) 0x28 represents about 22ms. (22ms = 0.1ms*10 + 0.7ms*30)	

Addr 0x4F : RS DRC Control 7

Bit	7	6	5	4	3	2	1	0
Name	Period_P (7:0)							

Name	Description	Value	Meaning	Ref.
Period_P	Vrms Period for Post-Band	h'0A	Period of Vrms calculation for High-Band. Roughly, the step between 1 and 10 is 0.1ms, and between 11 and 127 is 0.7ms. Over 128 is meaningless. Ex) 0x28 represents about 22ms. (22ms = 0.1ms*10 + 0.7ms*30)	

Addr 0x50 : AD DC Protection Control 0

Bit	7	6	5	4	3	2	1	0
Name	PDH				PDL			

Name	Description	Value	Meaning	Ref.
PDL	PWM Duty Low for Modulation Index Error	b'0000	40%	
		b'0001	35%	
		b'0010	30%	
		b'0011	25%	
		b'0100	20%	
		b'0101	15%	
		b'0110	10%	
		b'0111	5%	
		b'1000	45%	
PDH	PWM Duty High for Modulation Index Error	b'0000	60%	
		b'0001	65%	
		b'0010	70%	
		b'0011	75%	
		b'0100	80%	
		b'0101	85%	
		b'0110	90%	
		b'0111	95%	
		b'1000	55%	

Addr 0x51 : D-BTL DC Protection Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	MLPA			

Name	Description	Value	Meaning	Ref.
MLPA	D-BTL Duty High for Modulation Index Error	b'0000	5%	
		b'0001	10%	
		b'0010	15%	
		b'0011	20%	
		b'0100	25%	
		b'0101	30%	
		b'0110	35%	
		b'0111	40%	
		b'1000	45%	
		b'1001	50%	

Addr 0x52 : DC Protection Control 2

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	PFE	DFE	MFE

Name	Description	Value	Meaning	Ref.
MFE	Modulation Index Error Enable	b'0	Modulation Index Error Disable	
		b'1	Modulation Index Error Enable	
DFE	DRC Coefficient Error Enable	b'0	MDRC Coefficient Error Disable	
		b'1	MDRC Coefficient Error Enable	
PFE	PEQ Coefficient Error Enable	b'0	PEQ Coefficient Error Disable	
		b'1	PEQ Coefficient Error Enable	

Addr 0x53 : DC Protection Control 3

Bit	7	6	5	4	3	2	1	0
Name	X	X	PCS3					

Name	Description	Value	Meaning	Ref.
PCS3	PEQ RX Checksum (29:24)		default = 0x36	

Addr 0x54 : DC Protection Control 4

Bit	7	6	5	4	3	2	1	0
Name	PCS2							

Name	Description	Value	Meaning	Ref.
PCS2	PEQ RX Checksum (23:16)		default = 0x00	

Addr 0x55 : DC Protection Control 5

Bit	7	6	5	4	3	2	1	0
Name	PCS1							

Name	Description	Value	Meaning	Ref.
PCS1	PEQ RX Checksum (15:8)		default = 0x00	

Addr 0x56 : DC Protection Control 6

Bit	7	6	5	4	3	2	1	0
Name	PCS0							

Name	Description	Value	Meaning	Ref.
PCS0	PEQ RX Checksum (7:0)		default = 0x00	

Addr 0x57 : DC Protection Control 7

Bit	7	6	5	4	3	2	1	0
Name	X	X	DCS3					

Name	Description	Value	Meaning	Ref.
DCS3	MDRC RX Checksum (29:24)		default = 0x14	

Addr 0x58 : DC Protection Control 8

Bit	7	6	5	4	3	2	1	0
Name	DCS2							

Name	Description	Value	Meaning	Ref.
DCS2	MDRC RX Checksum (23:16)		default = 0x8E	

Addr 0x59 : DC Protection Control 9

Bit	7	6	5	4	3	2	1	0
Name	DCS1							

Name	Description	Value	Meaning	Ref.
DCS1	MDRC RX Checksum (15:8)		default = 0x9C	

Addr 0x5A : DC Protection Control 10

Bit	7	6	5	4	3	2	1	0
Name	DCS0							

Name	Description	Value	Meaning	Ref.
DCS0	MDRC RX Checksum (7:0)		default = 0x10	

Addr 0x5B : DC Protection Control 11 (read only)

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	PEF	DEF	MEF

Name	Description	Value	Meaning	Ref.
MEF	Modulation Index Error Flag	b'0		
		b'1	Modulation Index Error	
DEF	DRC Coefficient Error Flag	b'0		
		b'1	MDRC Coefficient Error	
PEF	PEQ Coefficient Error Flag	b'0		
		b'1	PEQ Coefficient Error	

Addr 0x5C : Checksum Download Type Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	X	CDT

Name	Description	Value	Meaning	Ref.
CDT	Checksum download type	b'0	1byte * 4 (addr 0x53~0x56, 0x57~0x5A)	
		b'1	4byte (Coefficient mode)	

Addr 0x5D : Driver Control

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	PWM MASK_SEL	SHDN

Name	Description	Value	Meaning	Ref.
SHDN	Shutdown	b'0	SHDN pin go to low	
		b'1	SHDN pin go to high	
PWM MASK_SEL	PWM MASK output select	b'0	PWM_MASK0,1 pin <= PWM_MASK0,1	
		b'1	PWM_MASK0,1 pin <= SHDN	

Reserved Address 0x5E ~ 0x5F

Addr 0x60 : SSRC Control 0

Bit	7	6	5	4	3	2	1	0
Name	X	X	DCESW	X	FSFHM	FSFSM	X	X

Name	Description	Value	Meaning	Ref.
FSFSM	frequency stable effect on soft mute flag	b'0	no effect on soft mute flag	
		b'1	soft mute flag = 1 when unstable state	
FSFHM	frequency stable effect on hard mute flag	b'0	no effect on hard mute flag	
		b'1	hard mute flag = 1 when unstable state	
DCESW	DC Check Enable of SRC WCK	b'0	DC Check Disable in SRC WCK	
		b'1	DC Check Enable in SRC WCK	

Addr 0x61 : SSRC Control 1

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	FVT			

Name	Description	Value	Meaning	Ref.
FVT	Frequency variation threshold	b'0000 ~ b'1111	threshold value for frequency stable check (unsigned integer) default : b'0111	

Reserved Address 0x62 ~ 0x65

Addr 0x66 : I²C Glitch Filter

Bit	7	6	5	4	3	2	1	0
Name	GFO	DUR						

Name	Description	Value	Meaning	Ref.
DUR	glitch width	b'0000000 ~ b'1111111	minimum pulse width = DUR + 20 ns reset default = 15 * 10 ns (DUR default = b'0001111)	
GFO	Glitch filter enable/disable	b'0	Glitch filter on	
		b'1	Bypass	

Reserved Address 0x67**Addr 0x68 : PWM Phase Control**

Bit	7	6	5	4	3	2	1	0
Name	PPC				PFC			

Name	Description	Value	Meaning	Ref.
PFC	PWM phase Fine Control	b'0000 ~ b'1001	Range is 0°~14.94° with 1.66° step	In Single ended mode, fixed as PFC = b'0000, and PPC = b' 0110 (90°)
PPC	PWM Phase Control	b'0000 ~ b'1100	Range is 0°~180° with 15° step. default = b'0110 (90°)	

Reserved Address 0x69 ~ 0x6D

Addr 0x6E : Watch Dog Error System Status (read only)

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	MEF	IWK	IBK	WDE

Name	Description	Value	Meaning	Ref.
WDE	Watch Dog Ratio Error	b'0		
		b'1	Watch Dog Error	
IBK	IIS BCK Ratio Error	b'0		
		b'1	IIS BCK Ratio Error	
IWK	IIS WCK Ratio Error	b'0		
		b'1	IIS WCK Ratio Error	
MEF	Modulation Index Error Flag	b'0		
		b'1	Modulation Index Error	

Addr 0x6F : PWM_MASK Control 5

Bit	7	6	5	4	3	2	1	0
Name	VMSK3	VMSK2	VMSK1	VMSK0	PMSK3	PMSK2	PMSK1	PMSK0

Name	Description	Value	Meaning	Ref.
PMSKn	Masking bit of PWM off control	b'0	Mask bit indicating the validity of n-th bit of	
		b'1	Addr 0x6E system register: If the n-th bit of this	
VMSKn	Masking bit of PWM_MASK signal	b'0	register is zero, the n-th bit of Addr 0x6E	
		b'1	system register is invalid. The n-th bit of Addr 0x6E is valid only when the n-th mask bit is one.	

Addr 0x70 : System Status Register (0x6E, 0x75) Holding Control 1

Bit	7	6	5	4	3	2	1	0
Name	HIWK	HIBK	HWDE	X	HMEF	HMPW	HULCK	X

Name	Description	Value	Meaning	Ref.
HULCK	Enable bit of Holding the ULCK status	b'0	Update the new value without holding the ULCK status bit of 0x75	
		b'1	Hold the first different value	
HMPW	Enable bit of Holding the MPW status	b'0	Update the new value without holding the MPW status bit of 0x75	
		b'1	Hold the first different value	
HMEF	Enable bit of Holding the MEF status	b'0	Update the new value without holding the MEF status bit of 0x6E	
		b'1	Hold the first different value	
HWDE	Enable bit of Holding the WDE status	b'0	Update the new value without holding the WDE status bit of 0x6E	
		b'1	Hold the first different value	
HIBK	Enable bit of Holding the IBK status	b'0	Update the new value without holding the IBK status bit of 0x6E	
		b'1	Hold the first different value	
HIWK	Enable bit of Holding the IWK status	b'0	Update the new value without holding the IWK status bit of 0x6E	
		b'1	Hold the first different value	

Addr 0x71 : POP Control 0

Bit	7	6	5	4	3	2	1	0
Name	RST							

Name	Description	Value	Meaning	Ref.
RST	Release Time	unsigned 0x10	WDE becomes 0 if Watch Dog detects no error during RST*10msec after WDE has been occurred.	

Addr 0x72 : POP Control 1

Bit	7	6	5	4	3	2	1	0
Name	ULM[15:8]							

Name	Description	Value	Meaning	Ref.
ULM		unsigned 0x00	Upper limit on ratio of BCK to CLK_FR_4	

Addr 0x73 : POP Control 2

Bit	7	6	5	4	3	2	1	0
Name	ULM[7:0]							

Name	Description	Value	Meaning	Ref.
ULM	Upper Limit	unsigned 0x20	Upper limit on ratio of BCK to CLK_FR_4	

Addr 0x74 : POP Control 3

Bit	7	6	5	4	3	2	1	0
Name	LLM[3:0]				0	0	0	WON

Name	Description	Value	Meaning	Ref.
LLM	Lower Limit	unsigned b'1001	Lower limit on ratio of BCK to CLK_FR_4	
WON	Watch-dog On	b'0	OFF	
		b'1	ON	

Addr 0x75 : System Error Status (read only)

Bit	7	6	5	4	3	2	1	0
Name	FSI		PSB	PDM		MPW	ULCK	PPM

Name	Description	Value	Meaning	Ref.
PPM	Permanent PWMMASK Indication flag	b'0		
		b'1	Indicated that PWM_MASK is in Permanent LOW state	
ULCK	Sampled PLL Unlock error	b'0	PLL is locked state.	
		b'1	PLL is unlocked state.	
MPW	MCK/WCK Ratio error	b'0	Ratio is incorrect.	
		b'1	Ratio is correct.	
PDM	Power Die Monitor (Temperature, Current, Voltage, Protection Error)	b'00	Current protection error	
		b'01	Voltage protection error	
		b'10	Temperature protection error	
		b'11	Normal state	
PSB	PWM switching on/off State Bit	b'0	PWM switching off state	
		b'1	PWM switching on state	
FSI	Sampling Frequency Information	b'00	48 kHz (44.1kHz)	
		b'01	96 kHz	
		b'10	32 kHz	

Addr 0x76 : Monitor

Bit	7	6	5	4	3	2	1	0
Name	Monitor2				Monitor1			

Name	Description	Value	Meaning	Ref.
Monitor 1	This output doesn't come through Power Device.	b'0000	Reserved	
		b'0001	Pwm1a=> Monitor 1 pin	
		b'0010	Pwm1b => Monitor 1 pin	
		b'0011	pwm2a => Monitor 1 pin	
		b'0100	Pwm2b => Monitor 1 pin	
		b'1111	SDATA out => Monitor 1 pin	
Monitor 2	This output doesn't come through Power Device.	b'0000	Reserved	
		b'0001	Pwm1a=> Monitor 2 pin	
		b'0010	Pwm1b => Monitor 2 pin	
		b'0011	pwm2a => Monitor 2 pin	
		b'0100	Pwm2b => Monitor 2 pin	
		b'1111	SDATA out => Monitor 2 pin	

Reserved Address 0x77 ~ 0x7B**Addr 0x7C : IIS Sdata_Out Control**

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	X	X	X	OUT_SEL

Name	Description	Value	Meaning	Ref.
OUT_SEL	Select data for IIS	b'0	Data after soft mute stage is selected	
	OUT	b'1	Data before EQ stage is selected	

Reserved Address 0x7D

Addr 0x7E : Bi-Quad Filter Coefficient Page

Bit	7	6	5	4	3	2	1	0
Name	X	X	X	X	APEQ_P	X	CH2	CH1

Name	Description	Value	Meaning	Ref.
CH1	Coefficient write enable	b'0	Disable coefficient write for ch1	
		b'1	Enable coefficient write for ch1	
CH2	Coefficient write enable	b'0	Disable coefficient write for ch2	
		b'1	Enable coefficient write for ch2	
APEQ_P	Coefficient write enable for APEQ Parameters	b'0	Disable coefficient write for APEQ Para.	
		b'1	Enable coefficient write for APEQ Para.	

Note : When writing into BQ1~BQ6 coefficients, Should write for both ch1 and ch2 separately.

When writing into BQ7~BQ16 coefficients, Just write for ch1.

(BQ7~BQ16 coefficients are same for both CH1 and CH2)

When writing into APEQ Parameters, Just write for APEQ_P.

Coefficient Mode:

0x00 ~ 0x31: BQ1 ~BQ10

0x32 ~ 0x4F: QMF_BQ1 ~ 6

0x50 ~ 0x52: Loudness filter gain 1 ~ 3

0x53 ~ 0x57 : Reserved

0x58 : Power Meter Gain

0x59 : Reserved

0x5A : BQ Checksum

0x5B : DRC Checksum

0x5C ~ 0x79 : BQ11 ~ BQ16

0x00 ~ 0x24: APEQ Parameters

B. Configuration Register Value Reference

Table 14. Master Volume

Index	dB	Index	dB	Index	dB	Index	dB	Index	dB	Index	dB
0xFF	0.0	0xD4	-21.5	0xA9	-43.0	0x7E	-64.5	0x53	-86.0	0x28	-107.5
0xFE	-0.5	0xD3	-22.0	0xA8	-43.5	0x7D	-65.0	0x52	-86.5	0x27	-108.0
0xFD	-1.0	0xD2	-22.5	0xA7	-44.0	0x7C	-65.5	0x51	-87.0	0x26	-108.5
0xFC	-1.5	0xD1	-23.0	0xA6	-44.5	0x7B	-66.0	0x50	-87.5	0x25	-109.0
0xFB	-2.0	0xD0	-23.5	0xA5	-45.0	0x7A	-66.5	0x4F	-88.0	0x24	-109.5
0xFA	-2.5	0xCF	-24.0	0xA4	-45.5	0x79	-67.0	0x4E	-88.5	0x23	-110.0
0xF9	-3.0	0xCE	-24.5	0xA3	-46.0	0x78	-67.5	0x4D	-89.0	0x22	-110.5
0xF8	-3.5	0xCD	-25.0	0xA2	-46.5	0x77	-68.0	0x4C	-89.5	0x21	-111.0
0xF7	-4.0	0xCC	-25.5	0xA1	-47.0	0x76	-68.5	0x4B	-90.0	0x20	-111.5
0xF6	-4.5	0xCB	-26.0	0xA0	-47.5	0x75	-69.0	0x4A	-90.5	0x1F	-112.0
0xF5	-5.0	0xCA	-26.5	0x9F	-48.0	0x74	-69.5	0x49	-91.0	0x1E	-112.5
0xF4	-5.5	0xC9	-27.0	0x9E	-48.5	0x73	-70.0	0x48	-91.5	0x1D	-113.0
0xF3	-6.0	0xC8	-27.5	0x9D	-49.0	0x72	-70.5	0x47	-92.0	0x1C	-113.5
0xF2	-6.5	0xC7	-28.0	0x9C	-49.5	0x71	-71.0	0x46	-92.5	0x1B	-114.0
0xF1	-7.0	0xC6	-28.5	0x9B	-50.0	0x70	-71.5	0x45	-93.0	0x1A	-114.5
0xF0	-7.5	0xC5	-29.0	0x9A	-50.5	0x6F	-72.0	0x44	-93.5	0x19	-115.0
0xEF	-8.0	0xC4	-29.5	0x99	-51.0	0x6E	-72.5	0x43	-94.0	0x18	-115.5
0xEE	-8.5	0xC3	-30.0	0x98	-51.5	0x6D	-73.0	0x42	-94.5	0x17	-116.0
0xED	-9.0	0xC2	-30.5	0x97	-52.0	0x6C	-73.5	0x41	-95.0	0x16	-116.5
0xEC	-9.5	0xC1	-31.0	0x96	-52.5	0x6B	-74.0	0x40	-95.5	0x15	-117.0
0xEB	-10.0	0xC0	-31.5	0x95	-53.0	0x6A	-74.5	0x3F	-96.0	0x14	-117.5
0xEA	-10.5	0xBF	-32.0	0x94	-53.5	0x69	-75.0	0x3E	-96.5	0x13	-118.0
0xE9	-11.0	0xBE	-32.5	0x93	-54.0	0x68	-75.5	0x3D	-97.0	0x12	-118.5
0xE8	-11.5	0xBD	-33.0	0x92	-54.5	0x67	-76.0	0x3C	-97.5	0x11	-119.0
0xE7	-12.0	0xBC	-33.5	0x91	-55.0	0x66	-76.5	0x3B	-98.0	0x10	-119.5
0xE6	-12.5	0xBB	-34.0	0x90	-55.5	0x65	-77.0	0x3A	-98.5	0x0F	-120.0
0xE5	-13.0	0xBA	-34.5	0x8F	-56.0	0x64	-77.5	0x39	-99.0	0x0E	-120.5
0xE4	-13.5	0xB9	-35.0	0x8E	-56.5	0x63	-78.0	0x38	-99.5	0x0D	-121.0
0xE3	-14.0	0xB8	-35.5	0x8D	-57.0	0x62	-78.5	0x37	-100.0	0x0C	-121.5
0xE2	-14.5	0xB7	-36.0	0x8C	-57.5	0x61	-79.0	0x36	-100.5	0x0B	-122.0
0xE1	-15.0	0xB6	-36.5	0x8B	-58.0	0x60	-79.5	0x35	-101.0	0x0A	-122.5
0xE0	-15.5	0xB5	-37.0	0x8A	-58.5	0x5F	-80.0	0x34	-101.5	0x09	-123.0
0xDF	-16.0	0xB4	-37.5	0x89	-59.0	0x5E	-80.5	0x33	-102.0	0x08	-123.5
0xDE	-16.5	0xB3	-38.0	0x88	-59.5	0x5D	-81.0	0x32	-102.5	0x07	-124.0
0xDD	-17.0	0xB2	-38.5	0x87	-60.0	0x5C	-81.5	0x31	-103.0	0x06	-124.5
0xDC	-17.5	0xB1	-39.0	0x86	-60.5	0x5B	-82.0	0x30	-103.5	0x05	-125.0
0xDB	-18.0	0xB0	-39.5	0x85	-61.0	0x5A	-82.5	0x2F	-104.0	0x04	-125.5
0xDA	-18.5	0xAF	-40.0	0x84	-61.5	0x59	-83.0	0x2E	-104.5	0x03	NA
0xD9	-19.0	0xAE	-40.5	0x83	-62.0	0x58	-83.5	0x2D	-105.0	0x02	NA
0xD8	-19.5	0xAD	-41.0	0x82	-62.5	0x57	-84.0	0x2C	-105.5	0x01	NA
0xD7	-20.0	0xAC	-41.5	0x81	-63.0	0x56	-84.5	0x2B	-106.0	0x00	NA
0xD6	-20.5	0xAB	-42.0	0x80	-63.5	0x55	-85.0	0x2A	-106.5		
0xD5	-21.0	0xAA	-42.5	0x7F	-64.0	0x54	-85.5	0x29	-107.0		

Table 15. Channel Volume

Index	dB	Index	dB	Index	dB	Index	dB	Index	dB	Index	dB
0xFF	48.0	0xD4	26.5	0xA9	5.0	0x7E	-16.5	0x53	-38.0	0x28	-59.5
0xFE	47.5	0xD3	26.0	0xA8	4.5	0x7D	-17.0	0x52	-38.5	0x27	-60.0
0xFD	47.0	0xD2	25.5	0xA7	4.0	0x7C	-17.5	0x51	-39.0	0x26	-60.5
0xFC	46.5	0xD1	25.0	0xA6	3.5	0x7B	-18.0	0x50	-39.5	0x25	-61.0
0xFB	46.0	0xD0	24.5	0xA5	3.0	0x7A	-18.5	0x4F	-40.0	0x24	-61.5
0xFA	45.5	0xCF	24.0	0xA4	2.5	0x79	-19.0	0x4E	-40.5	0x23	-62.0
0xF9	45.0	0xCE	23.5	0xA3	2.0	0x78	-19.5	0x4D	-41.0	0x22	-62.5
0xF8	44.5	0xCD	23.0	0xA2	1.5	0x77	-20.0	0x4C	-41.5	0x21	-63.0
0xF7	44.0	0xCC	22.5	0xA1	1.0	0x76	-20.5	0x4B	-42.0	0x20	-63.5
0xF6	43.5	0xCB	22.0	0xA0	0.5	0x75	-21.0	0x4A	-42.5	0x1F	-64.0
0xF5	43.0	0xCA	21.5	0x9F	0.0	0x74	-21.5	0x49	-43.0	0x1E	-64.5
0xF4	42.5	0xC9	21.0	0x9E	-0.5	0x73	-22.0	0x48	-43.5	0x1D	-65.0
0xF3	42.0	0xC8	20.5	0x9D	-1.0	0x72	-22.5	0x47	-44.0	0x1C	-65.5
0xF2	41.5	0xC7	20.0	0x9C	-1.5	0x71	-23.0	0x46	-44.5	0x1B	-66.0
0xF1	41.0	0xC6	19.5	0x9B	-2.0	0x70	-23.5	0x45	-45.0	0x1A	-66.5
0xF0	40.5	0xC5	19.0	0x9A	-2.5	0x6F	-24.0	0x44	-45.5	0x19	-67.0
0xEF	40.0	0xC4	18.5	0x99	-3.0	0x6E	-24.5	0x43	-46.0	0x18	-67.5
0xEE	39.5	0xC3	18.0	0x98	-3.5	0x6D	-25.0	0x42	-46.5	0x17	-68.0
0xED	39.0	0xC2	17.5	0x97	-4.0	0x6C	-25.5	0x41	-47.0	0x16	-68.5
0xEC	38.5	0xC1	17.0	0x96	-4.5	0x6B	-26.0	0x40	-47.5	0x15	-69.0
0xEB	38.0	0xC0	16.5	0x95	-5.0	0x6A	-26.5	0x3F	-48.0	0x14	-69.5
0xEA	37.5	0xBF	16.0	0x94	-5.5	0x69	-27.0	0x3E	-48.5	0x13	-70.0
0xE9	37.0	0xBE	15.5	0x93	-6.0	0x68	-27.5	0x3D	-49.0	0x12	-70.5
0xE8	36.5	0xBD	15.0	0x92	-6.5	0x67	-28.0	0x3C	-49.5	0x11	-71.0
0xE7	36.0	0xBC	14.5	0x91	-7.0	0x66	-28.5	0x3B	-50.0	0x10	-71.5
0xE6	35.5	0xBB	14.0	0x90	-7.5	0x65	-29.0	0x3A	-50.5	0x0F	-72.0
0xE5	35.0	0xBA	13.5	0x8F	-8.0	0x64	-29.5	0x39	-51.0	0x0E	-72.5
0xE4	34.5	0xB9	13.0	0x8E	-8.5	0x63	-30.0	0x38	-51.5	0x0D	-73.0
0xE3	34.0	0xB8	12.5	0x8D	-9.0	0x62	-30.5	0x37	-52.0	0x0C	-73.5
0xE2	33.5	0xB7	12.0	0x8C	-9.5	0x61	-31.0	0x36	-52.5	0x0B	-74.0
0xE1	33.0	0xB6	11.5	0x8B	-10.0	0x60	-31.5	0x35	-53.0	0x0A	-74.5
0xE0	32.5	0xB5	11.0	0x8A	-10.5	0x5F	-32.0	0x34	-53.5	0x09	-75.0
0xDF	32.0	0xB4	10.5	0x89	-11.0	0x5E	-32.5	0x33	-54.0	0x08	-75.5
0xDE	31.5	0xB3	10.0	0x88	-11.5	0x5D	-33.0	0x32	-54.5	0x07	-76.0
0xDD	31.0	0xB2	9.5	0x87	-12.0	0x5C	-33.5	0x31	-55.0	0x06	-76.5
0xDC	30.5	0xB1	9.0	0x86	-12.5	0x5B	-34.0	0x30	-55.5	0x05	-77.0
0xDB	30.0	0xB0	8.5	0x85	-13.0	0x5A	-34.5	0x2F	-56.0	0x04	-77.5
0xDA	29.5	0xAF	8.0	0x84	-13.5	0x59	-35.0	0x2E	-56.5	0x03	-78.0
0xD9	29.0	0xAE	7.5	0x83	-14.0	0x58	-35.5	0x2D	-57.0	0x02	-78.5
0xD8	28.5	0xAD	7.0	0x82	-14.5	0x57	-36.0	0x2C	-57.5	0x01	-79.0
0xD7	28.0	0xAC	6.5	0x81	-15.0	0x56	-36.5	0x2B	-58.0	0x00	-295.0
0xD6	27.5	0xAB	6.0	0x80	-15.5	0x55	-37.0	0x2A	-58.5		
0xD5	27.0	0xAA	5.5	0x7F	-16.0	0x54	-37.5	0x29	-59.0		

Table 16. Mixer Gain & Polarity

Index	Polarity	dB	Index	Polarity	dB	Index	Polarity	dB	Index	Polarity	dB
7E	+	18	7D	-	18	3E	+	-4	3D	-	-4
7C	+	17	7B	-	17	3C	+	-4.5	3B	-	-4.5
7A	+	16	79	-	16	3A	+	-5	39	-	-5
78	+	15	77	-	15	38	+	-5.5	37	-	-5.5
76	+	14	75	-	14	36	+	-6	35	-	-6
74	+	13	73	-	13	34	+	-7	33	-	-7
72	+	12	71	-	12	32	+	-8	31	-	-8
70	+	11	6F	-	11	30	+	-9	2F	-	-9
6E	+	10	6D	-	10	2E	+	-10	2D	-	-10
6C	+	9	6B	-	9	2C	+	-11	2B	-	-11
6A	+	8	69	-	8	2A	+	-12	29	-	-12
68	+	7	67	-	7	28	+	-13	27	-	-13
66	+	6	65	-	6	26	+	-14	25	-	-14
64	+	5.5	63	-	5.5	24	+	-15	23	-	-15
62	+	5	61	-	5	22	+	-16	21	-	-16
60	+	4.5	5F	-	4.5	20	+	-17	1F	-	-17
5E	+	4	5D	-	4	1E	+	-18	1D	-	-18
5C	+	3.5	5B	-	3.5	1C	+	-19	1B	-	-19
5A	+	3	59	-	3	1A	+	-20	19	-	-20
58	+	2.5	57	-	2.5	18	+	-21	17	-	-21
56	+	2	55	-	2	16	+	-22	15	-	-22
54	+	1.5	53	-	1.5	14	+	-23	13	-	-23
52	+	1	51	-	1	12	+	-24	11	-	-24
50	+	0.5	4F	-	0.5	10	+	-25	0F	-	-25
4E	+	0	4D	-	0	0E	+	-26	0D	-	-26
4C	+	-0.5	4B	-	-0.5	0C	+	-27	0B	-	-27
4A	+	-1	49	-	-1	0A	+	-28	09	-	-28
48	+	-1.5	47	-	-1.5	08	+	-29	07	-	-29
46	+	-2	45	-	-2	06	+	-30	05	-	-30
44	+	-2.5	43	-	-2.5	04	+	-31	03	-	-31
42	+	-3	41	-	-3	02	+	-32	01	-	-32
40	+	-3.5	3F	-	-3.5	00	+	-150			

Table 17. Dynamic Range Control Threshold

dB	Value	dB	Value	dB	Value	dB	Value
-57	FF	-5.5	DF	-2.3	BF	0.9	9F
-54	FE	-5.4	DE	-2.2	BE	1	9E
-51	FD	-5.3	DD	-2.1	BD	1.25	9D
-48	FC	-5.2	DC	-2	BC	1.5	9C
-45	FB	-5.1	DB	-1.9	BB	1.75	9B
-42	FA	-5	DA	-1.8	BA	2	9A
-39	F9	-4.9	D9	-1.7	B9	2.25	99
-36	F8	-4.8	D8	-1.6	B8	2.5	98
-33	F7	-4.7	D7	-1.5	B7	2.75	97
-30	F6	-4.6	D6	-1.4	B6	3	96
-27	F5	-4.5	D5	-1.3	B5	3.25	95
-24	F4	-4.4	D4	-1.2	B4	3.5	94
-21	F3	-4.3	D3	-1.1	B3	3.75	93
-18	F2	-4.2	D2	-1	B2	4	92
-15	F1	-4.1	D1	-0.9	B1	4.25	91
-12	F0	-4	D0	-0.8	B0	4.5	90
-11.5	EF	-3.9	CF	-0.7	AF	4.75	8F
-11	EE	-3.8	CE	-0.6	AE	5	8E
-10.5	ED	-3.7	CD	-0.5	AD	5.5	8D
-10	EC	-3.6	CC	-0.4	AC	6	8C
-9.5	EB	-3.5	CB	-0.3	AB	6.5	8B
-9	EA	-3.4	CA	-0.2	AA	7	8A
-8.5	E9	-3.3	C9	-0.1	A9	7.5	89
-8	E8	-3.2	C8	0	A8	8	88
-7.5	E7	-3.1	C7	0.1	A7	8.5	87
-7	E6	-3	C6	0.2	A6	9	86
-6.5	E5	-2.9	C5	0.3	A5	9.5	85
-6	E4	-2.8	C4	0.4	A4	10	84
-5.9	E3	-2.7	C3	0.5	A3	10.5	83
-5.8	E2	-2.6	C2	0.6	A2	11	82
-5.7	E1	-2.5	C1	0.7	A1	11.5	81
-5.6	E0	-2.4	C0	0.8	A0	12	80

※ CPR bit(MSB) = 1

Table 18. Auto Mute Detection Threshold Table

Name	Description	Value	dB
AT	Auto-mute Detection threshold	0000	-126
		0001	-120
		0010	-114
		0011	-108
		0100	-102
		0101	-96
		0110	-90
		0111	-84
		1000	-78
		1001	-72
		1010	-66
		1011	-60
		1100	-54
		1101	-48
		1110	-42
		1111	Auto-mute

※ Do not use value 1111.





Table 19. Power Meter Reading Table





addr 0x54 (Decimal)	addr 0x54 (Hex)	dB	addr 0x54 (Decimal)	addr 0x54 (Hex)	dB	addr 0x54 (Decimal)	addr 0x54 (Hex)	dB	addr 0x54 (Decimal)	addr 0x54 (Hex)	dB
0	0x00	-0.0	64	0x40	-32.0	128	0x80	-64.0	192	0xC0	-96.0
1	0x01	-0.5	65	0x41	-32.5	129	0x81	-64.5	193	0xC1	-96.5
2	0x02	-1.0	66	0x42	-33.0	130	0x82	-65.0	194	0xC2	-97.0
3	0x03	-1.5	67	0x43	-33.5	131	0x83	-65.5	195	0xC3	-97.5
4	0x04	-2.0	68	0x44	-34.0	132	0x84	-66.0	196	0xC4	-98.0
5	0x05	-2.5	69	0x45	-34.5	133	0x85	-66.5	197	0xC5	-98.5
6	0x06	-3.0	70	0x46	-35.0	134	0x86	-67.0	198	0xC6	-99.0
7	0x07	-3.5	71	0x47	-35.5	135	0x87	-67.5	199	0xC7	-99.5
8	0x08	-4.0	72	0x48	-36.0	136	0x88	-68.0	200	0xC8	-100.0
9	0x09	-4.5	73	0x49	-36.5	137	0x89	-68.5	201	0xC9	-100.5
10	0x0A	-5.0	74	0x4A	-37.0	138	0x8A	-69.0	202	0xCA	-101.0
11	0x0B	-5.5	75	0x4B	-37.5	139	0x8B	-69.5	203	0xCB	-101.5
12	0x0C	-6.0	76	0x4C	-38.0	140	0x8C	-70.0	204	0xCC	-102.0
13	0x0D	-6.5	77	0x4D	-38.5	141	0x8D	-70.5	205	0xCD	-102.5
14	0x0E	-7.0	78	0x4E	-39.0	142	0x8E	-71.0	206	0xCE	-103.0
15	0x0F	-7.5	79	0x4F	-39.5	143	0x8F	-71.5	207	0xCF	-103.5
16	0x10	-8.0	80	0x50	-40.0	144	0x90	-72.0	208	0xD0	-104.0
17	0x11	-8.5	81	0x51	-40.5	145	0x91	-72.5	209	0xD1	-104.5
18	0x12	-9.0	82	0x52	-41.0	146	0x92	-73.0	210	0xD2	-105.0
19	0x13	-9.5	83	0x53	-41.5	147	0x93	-73.5	211	0xD3	-105.5
20	0x14	-10.0	84	0x54	-42.0	148	0x94	-74.0	212	0xD4	-106.0
21	0x15	-10.5	85	0x55	-42.5	149	0x95	-74.5	213	0xD5	-106.5
22	0x16	-11.0	86	0x56	-43.0	150	0x96	-75.0	214	0xD6	-107.0
23	0x17	-11.5	87	0x57	-43.5	151	0x97	-75.5	215	0xD7	-107.5
24	0x18	-12.0	88	0x58	-44.0	152	0x98	-76.0	216	0xD8	-108.0
25	0x19	-12.5	89	0x59	-44.5	153	0x99	-76.5	217	0xD9	-108.5
26	0x1A	-13.0	90	0x5A	-45.0	154	0x9A	-77.0	218	0xDA	-109.0
27	0x1B	-13.5	91	0x5B	-45.5	155	0x9B	-77.5	219	0xDB	-109.5
28	0x1C	-14.0	92	0x5C	-46.0	156	0x9C	-78.0	220	0xDC	-110.0
29	0x1D	-14.5	93	0x5D	-46.5	157	0x9D	-78.5	221	0xDD	-110.5
30	0x1E	-15.0	94	0x5E	-47.0	158	0x9E	-79.0	222	0xDE	-111.0
31	0x1F	-15.5	95	0x5F	-47.5	159	0x9F	-79.5	223	0xDF	-111.5
32	0x20	-16.0	96	0x60	-48.0	160	0xA0	-80.0	224	0xE0	-112.0
33	0x21	-16.5	97	0x61	-48.5	161	0xA1	-80.5	225	0xE1	-112.5
34	0x22	-17.0	98	0x62	-49.0	162	0xA2	-81.0	226	0xE2	-113.0
35	0x23	-17.5	99	0x63	-49.5	163	0xA3	-81.5	227	0xE3	-113.5
36	0x24	-18.0	100	0x64	-50.0	164	0xA4	-82.0	228	0xE4	-114.0
37	0x25	-18.5	101	0x65	-50.5	165	0xA5	-82.5	229	0xE5	-114.5
38	0x26	-19.0	102	0x66	-51.0	166	0xA6	-83.0	230	0xE6	-115.0
39	0x27	-19.5	103	0x67	-51.5	167	0xA7	-83.5	231	0xE7	-115.5
40	0x28	-20.0	104	0x68	-52.0	168	0xA8	-84.0	232	0xE8	-116.0
41	0x29	-20.5	105	0x69	-52.5	169	0xA9	-84.5	233	0xE9	-116.5
42	0x2A	-21.0	106	0x6A	-53.0	170	0xAA	-85.0	234	0xEA	-117.0
43	0x2B	-21.5	107	0x6B	-53.5	171	0xAB	-85.5	235	0xEB	-117.5
44	0x2C	-22.0	108	0x6C	-54.0	172	0xAC	-86.0	236	0xEC	-118.0
45	0x2D	-22.5	109	0x6D	-54.5	173	0xAD	-86.5	237	0xED	-118.5
46	0x2E	-23.0	110	0x6E	-55.0	174	0xAE	-87.0	238	0xEE	-119.0
47	0x2F	-23.5	111	0x6F	-55.5	175	0xAF	-87.5	239	0xEF	-119.5
48	0x30	-24.0	112	0x70	-56.0	176	0xB0	-88.0	240	0xF0	-120.0
49	0x31	-24.5	113	0x71	-56.5	177	0xB1	-88.5	241	0xF1	-120.5
50	0x32	-25.0	114	0x72	-57.0	178	0xB2	-89.0	242	0xF2	-121.0
51	0x33	-25.5	115	0x73	-57.5	179	0xB3	-89.5	243	0xF3	-121.5
52	0x34	-26.0	116	0x74	-58.0	180	0xB4	-90.0	244	0xF4	-122.0
53	0x35	-26.5	117	0x75	-58.5	181	0xB5	-90.5	245	0xF5	-122.5
54	0x36	-27.0	118	0x76	-59.0	182	0xB6	-91.0	246	0xF6	-123.0
55	0x37	-27.5	119	0x77	-59.5	183	0xB7	-91.5	247	0xF7	-123.5
56	0x38	-28.0	120	0x78	-60.0	184	0xB8	-92.0	248	0xF8	-124.0
57	0x39	-28.5	121	0x79	-60.5	185	0xB9	-92.5	249	0xF9	-124.5
58	0x3A	-29.0	122	0x7A	-61.0	186	0xBA	-93.0	250	0xFA	-125.0
59	0x3B	-29.5	123	0x7B	-61.5	187	0xBB	-93.5	251	0xFB	-125.5
60	0x3C	-30.0	124	0x7C	-62.0	188	0xBC	-94.0	252	0xFC	-126.0
61	0x3D	-30.5	125	0x7D	-62.5	189	0xBD	-94.5	253	0xFD	-126.5
62	0x3E	-31.0	126	0x7E	-63.0	190	0xBE	-95.0	254	0xFE	-127.0
63	0x3F	-31.5	127	0x7F	-63.5	191	0xBF	-95.5	255	0xFF	< -127.5





※ Output 8bit value : $(-dB * 2)$, n dB = output 8bit * 0.5

C. Typical Characteristics Graph





Total Harmonic Distortion + Noise vs. Power, BTL D-BTL Mode Configuration, 8Ω

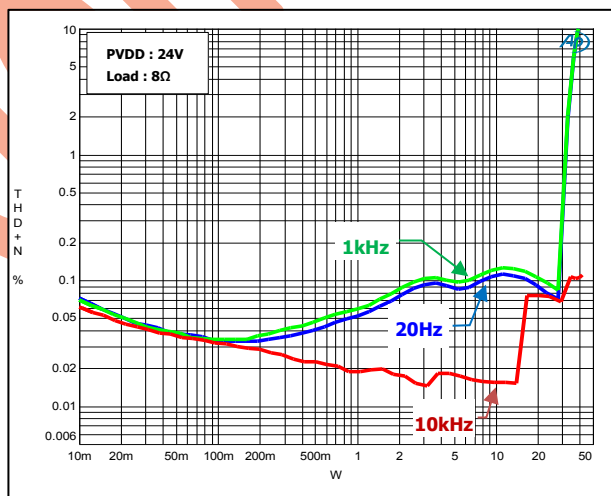
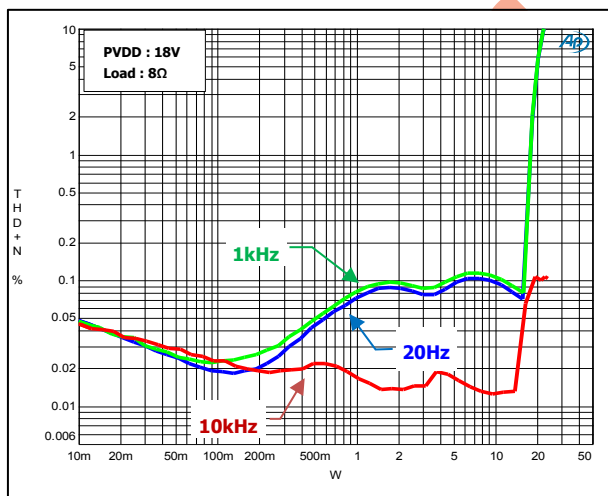
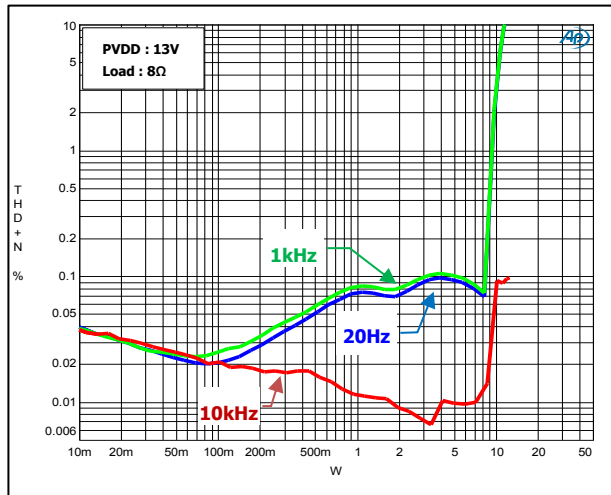
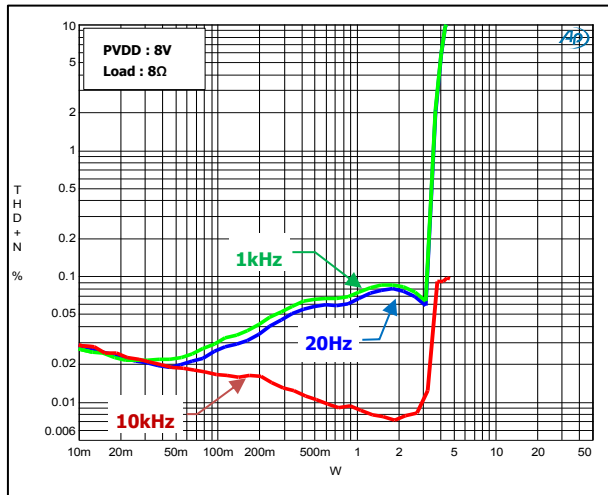


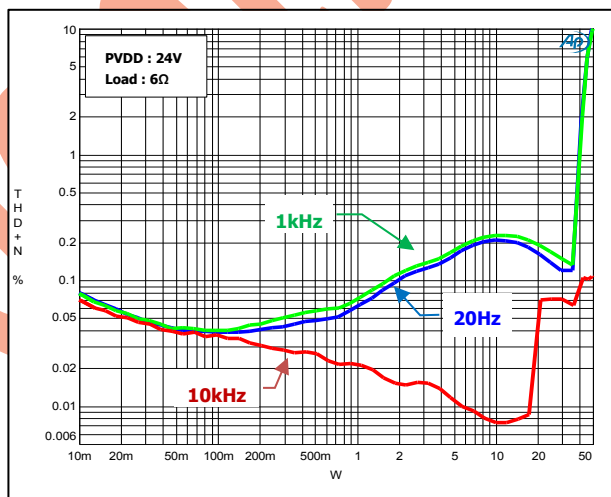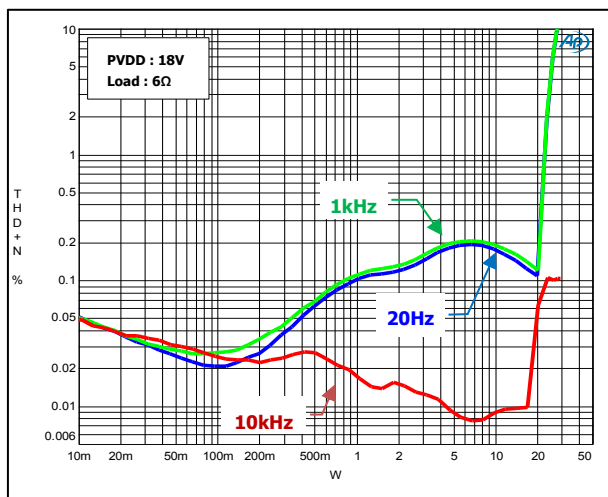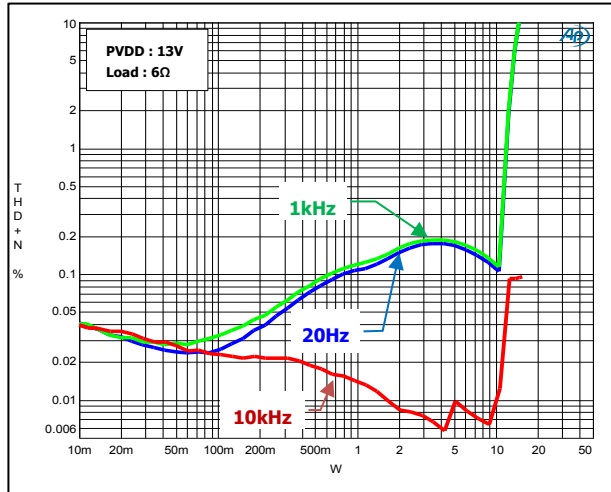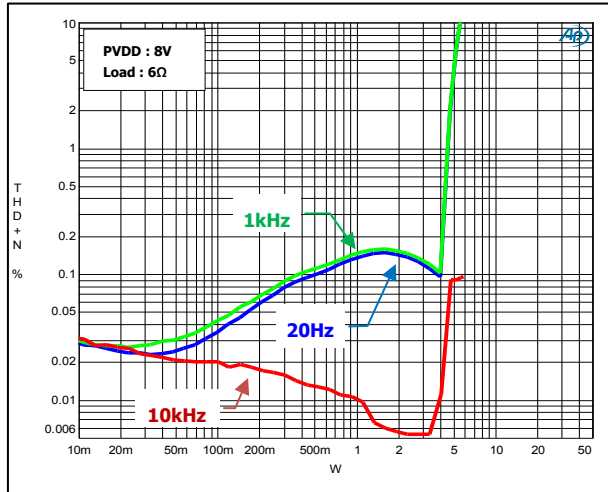Total Harmonic Distortion + Noise vs. Power, BTL D-BTL Mode Configuration, 6Ω

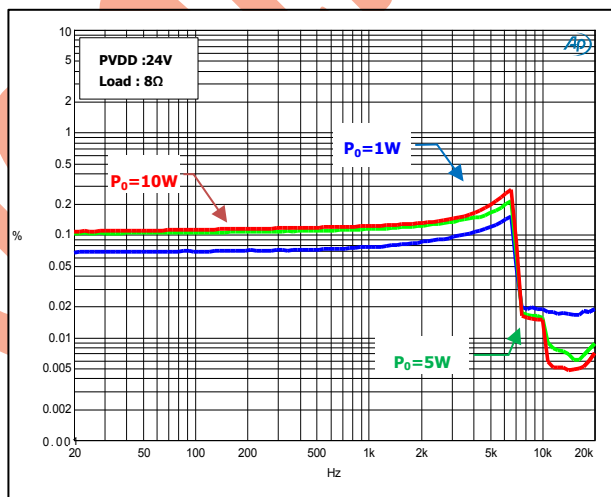
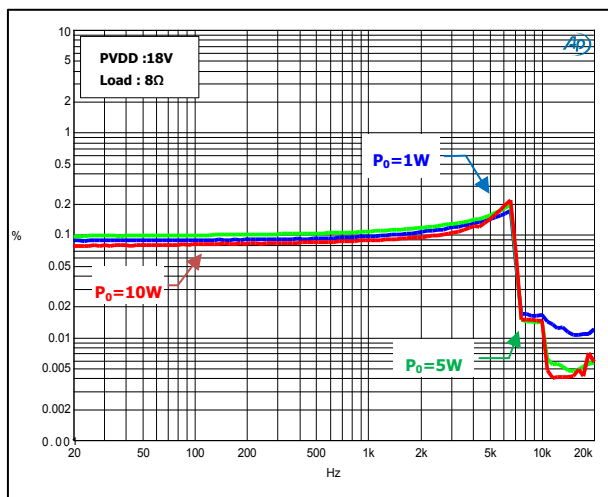
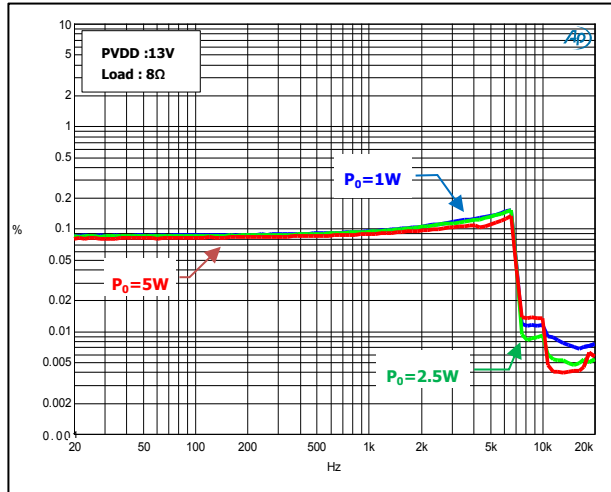
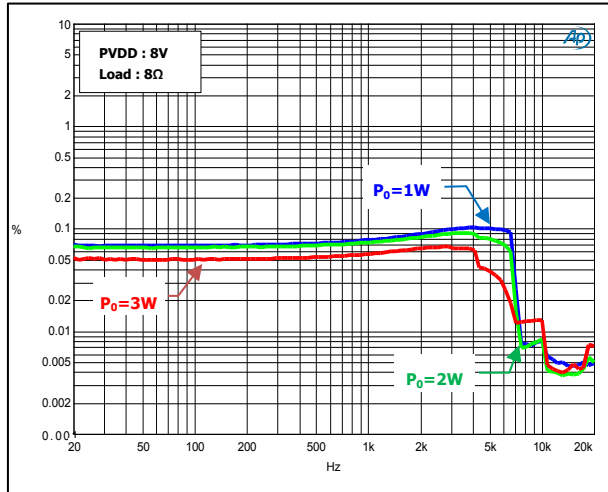
Total Harmonic Distortion + Noise vs. Frequency, BTL D-BTL Mode Configuration, 8Ω

Total Harmonic Distortion + Noise vs. Frequency, BTL D-BTL Mode Configuration, 6Ω

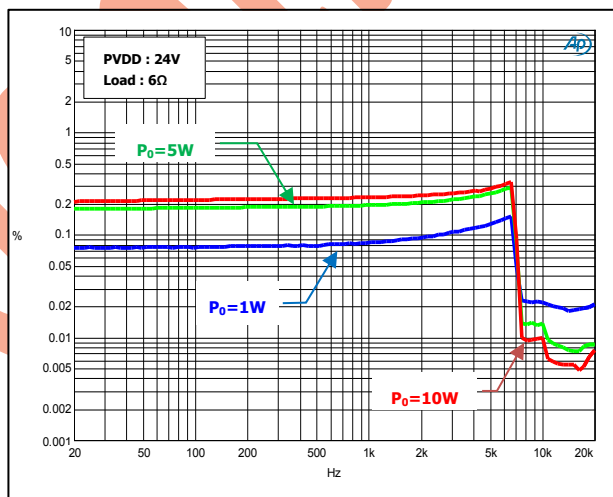
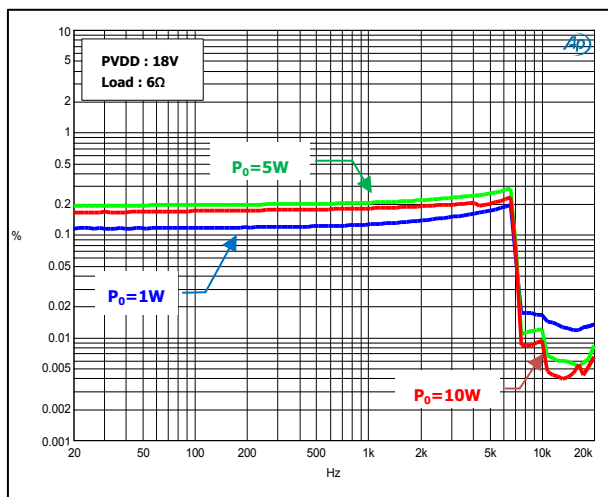
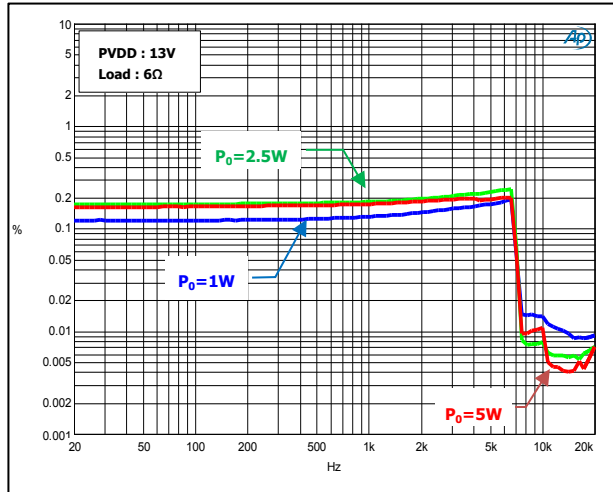
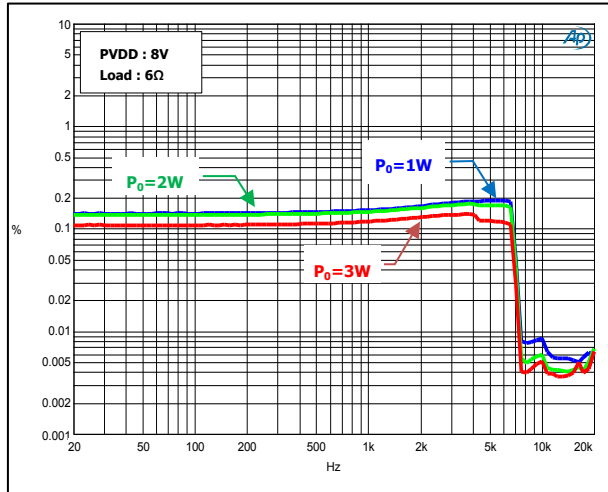


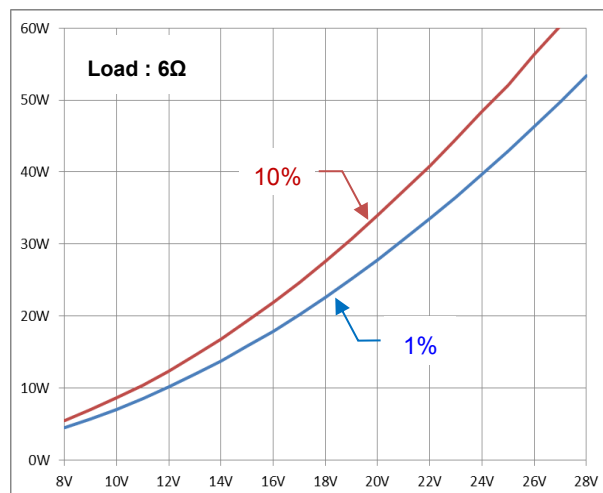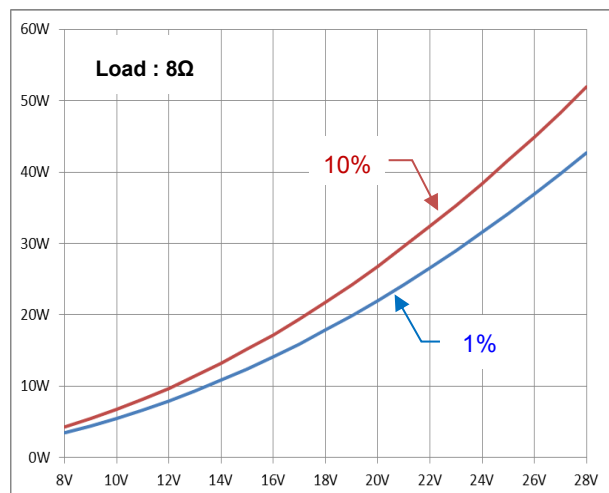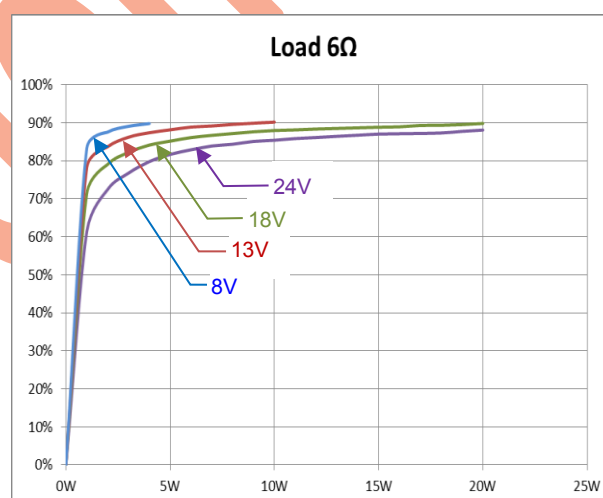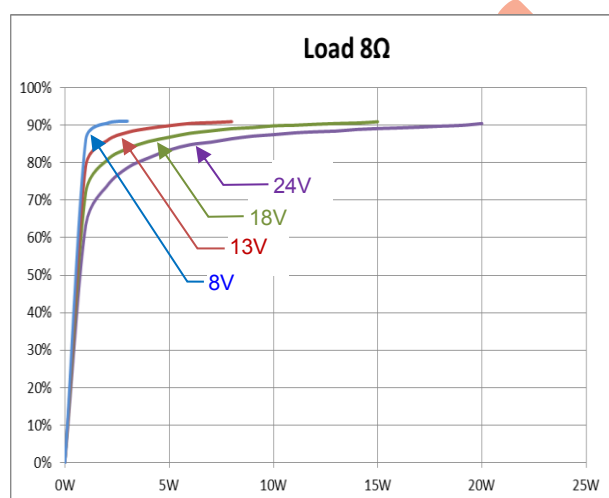Output Power vs. PVDD, BTL D-BTL Mode Configuration**Efficiency vs. Total Power, BTL D-BTL Mode Configuration**


Total Harmonic Distortion + Noise vs. Power, PBTL D-BTL Mode Configuration, 4Ω

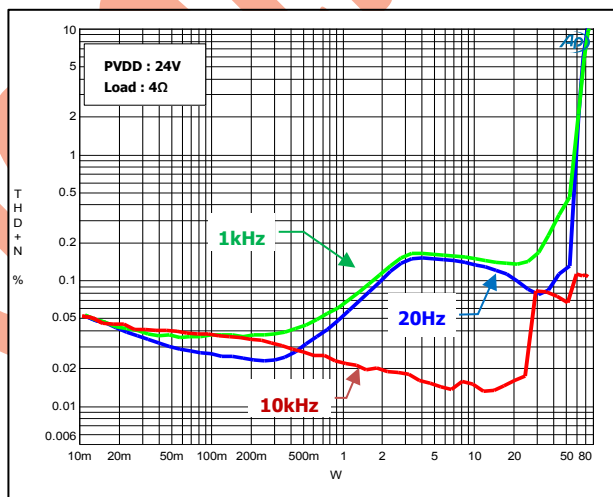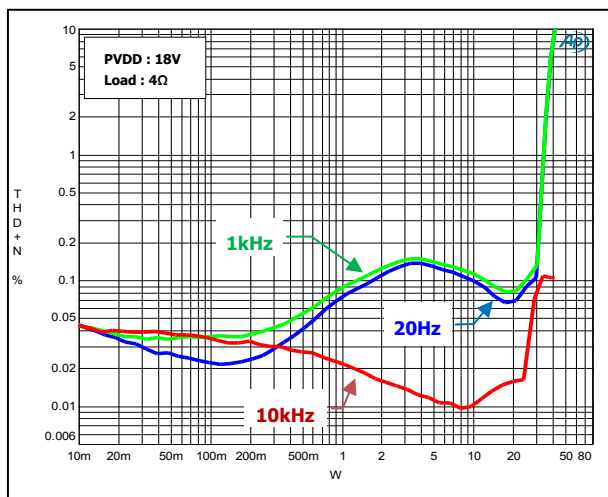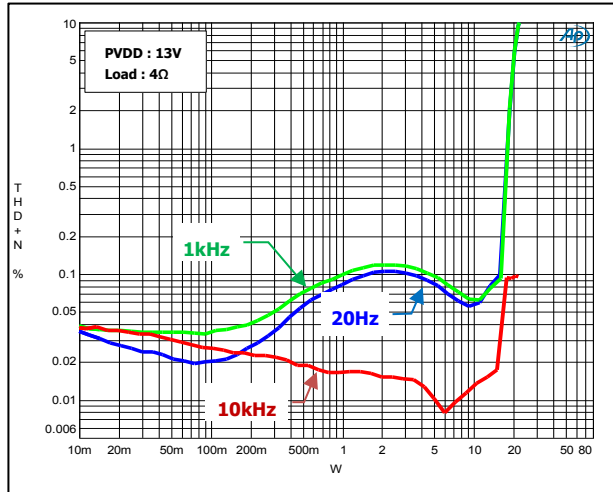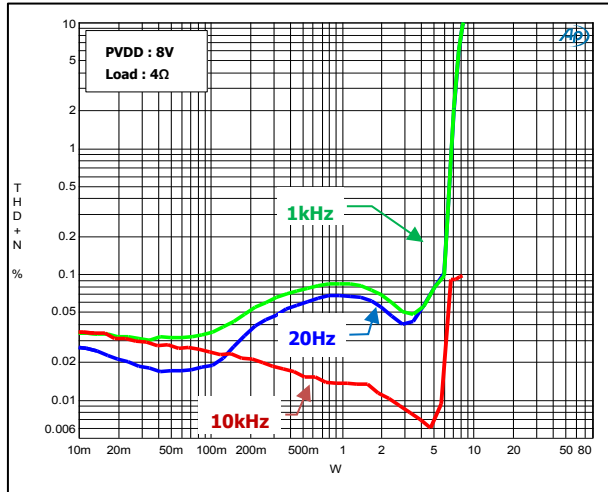


Total Harmonic Distortion + Noise vs. Frequency, PBTL D-BTL Mode Configuration, 4Ω

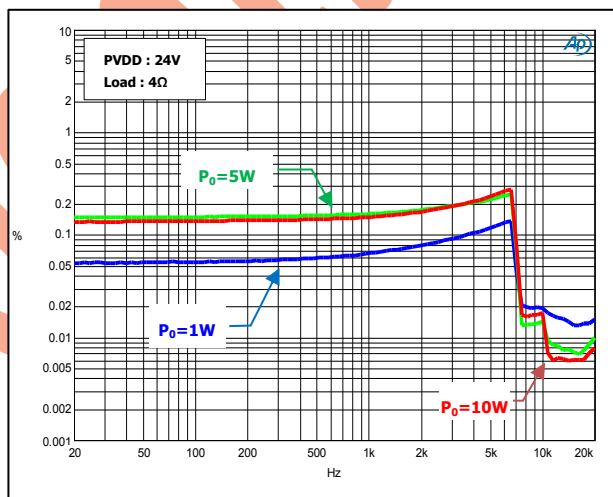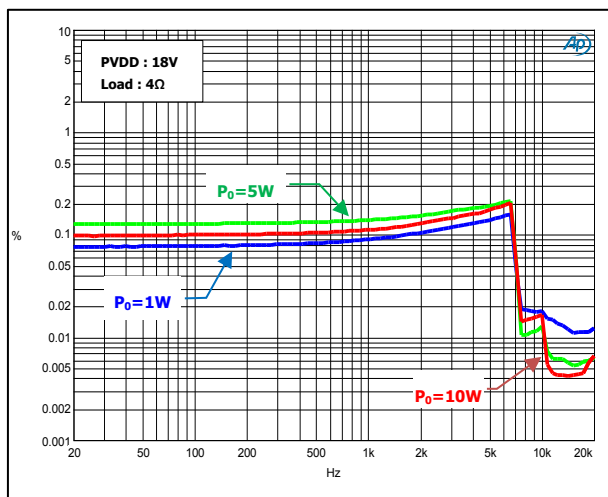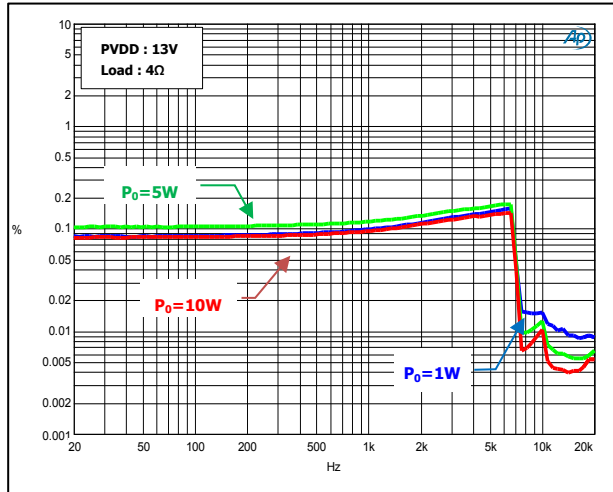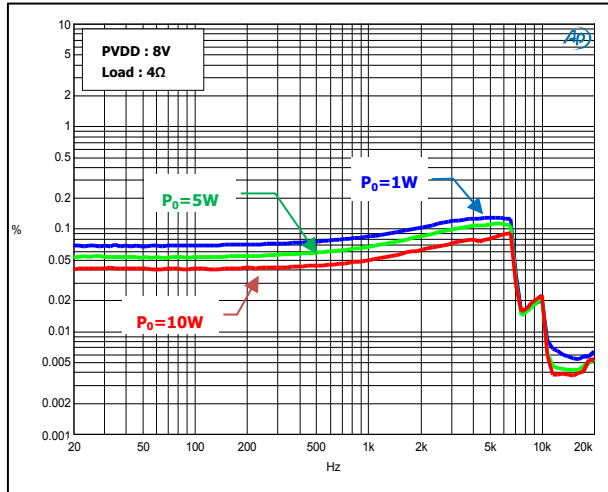

Output Power vs. PVDD, PBTL D-BTL Mode Configuration

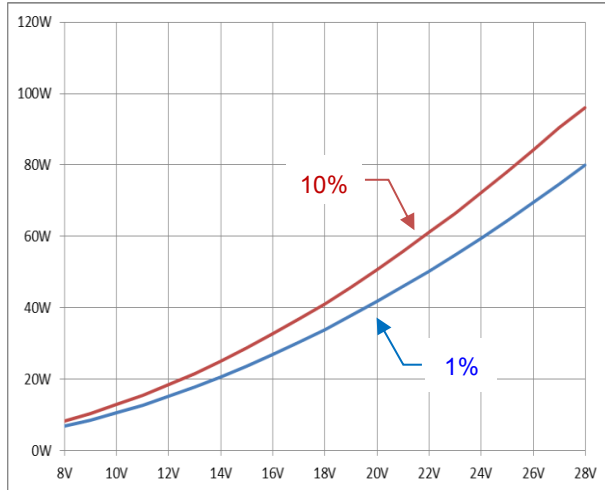

Efficiency vs. Total Power, PBTL D-BTL Mode Configuration

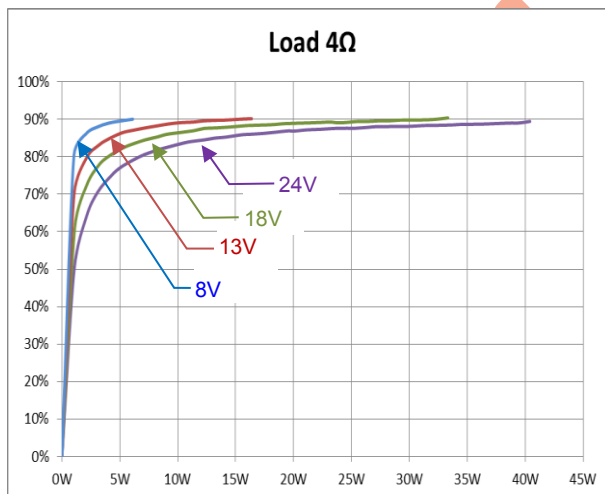

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

2. Packing Information


(Total 8Page : 94-101)

Packing Information


1. 포장 수량

Device Name	Package	Q'ty / Reel	PIN 1	MBB	Inner Box	Outer Box
WA20-6829B	QFN 6X6	3,000 Unit/ 1Reel	좌상	3,000 Unit	1 Reel / 3,000 Unit	18,000 Unit

2. Pin1 Orientation

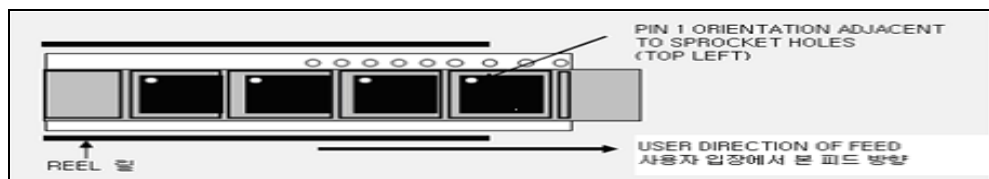

3. Leader and Trailer 수량

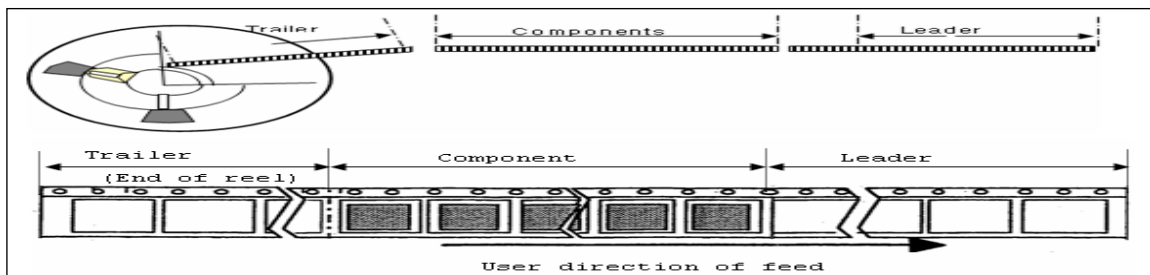


Device Name	Package	Trailer	Components	Leader
WA20-6829B	QFN 6X6	180mm	3,000Units	410mm

4. Packing Process

4.1. Reel (HIC : 5%, 10%, 60%)

4.1.1 Guard Band 16mm 사용 한다.

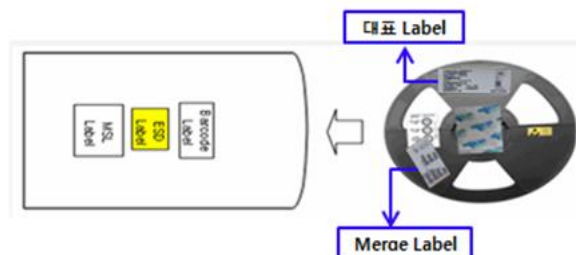

Packing Information

4.2. 진공 상태 및 내부 BOX 포장 방법

- Merge Reel 경우 Reel / AL Bag / Inner에 Merge Label 부착 한다.




4.3. INNER BOX - Merge Reel 경우 Reel / AL Bag / Inner에 Merge Label 부착 한다.

4.3.1 INNER BOX (Label 1장 씩 추가 발행하여 Box 마다 Box 내 동봉)



(Normal INNER BOX)



(Merge INNER BOX)

4.4. OUTER BOX (BOX에 구성 되는 INNER LABEL을 부착한다)

4.4.1 OUTER BOX Label 부착 시 좌측 상단으로부터 세로 6Cm / 가로 1Cm 여유를 두고 부착 한다.



Packing Information

Attach 1

[Moisture Sensitive Caution Label & ESD Caution Label 및 Pb Free Label]

1) Moisture Sensitive Caution Label

	CAUTION This bag contains MOISTURE-SENSITIVE DEVICES	LEVEL 3
		If blank, see adjacent bar code label
1. Calculated shelf life in sealed bag : 12 months at < 40°C and < 90% relative humidity (RH).		
2. Peak package body temperature : _____ °C		Pb free : 260°C
		If blank, see adjacent bar code label
3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must		
a) Mounted within 168 hours of factory conditions		
		If blank, see adjacent bar code label
≤ 30°C / 60% RH		
b) Stored at < 10% RH		
4. Devices require bake, before mounting, if :		
a) Humidity Indicator Card is > 10% when read at 23 ± 5°C		
b) 3a or 3b not met.		
5. If baking is required, devices may be baked for 48 hours at 125°C±5°C		
Note : If device containers cannot be subjected to high temperature or shorter bake times are desired, reference IPC/JEDEC J-STD-033 for bake procedure		
Bag seal date : _____		Sealing Date
		If blank, see adjacent bar code label
Note : Level and body temperature defined by IPC/JEDEC J-STD-020		

2) ESD Caution Sticker



3) Humidity Indicator Card(3Dots 5%-10%-60%)




4) Power dry_sorb(Desiccant) : 50g



Packing Information

Attach 2

[Carrier Tape Drawing]

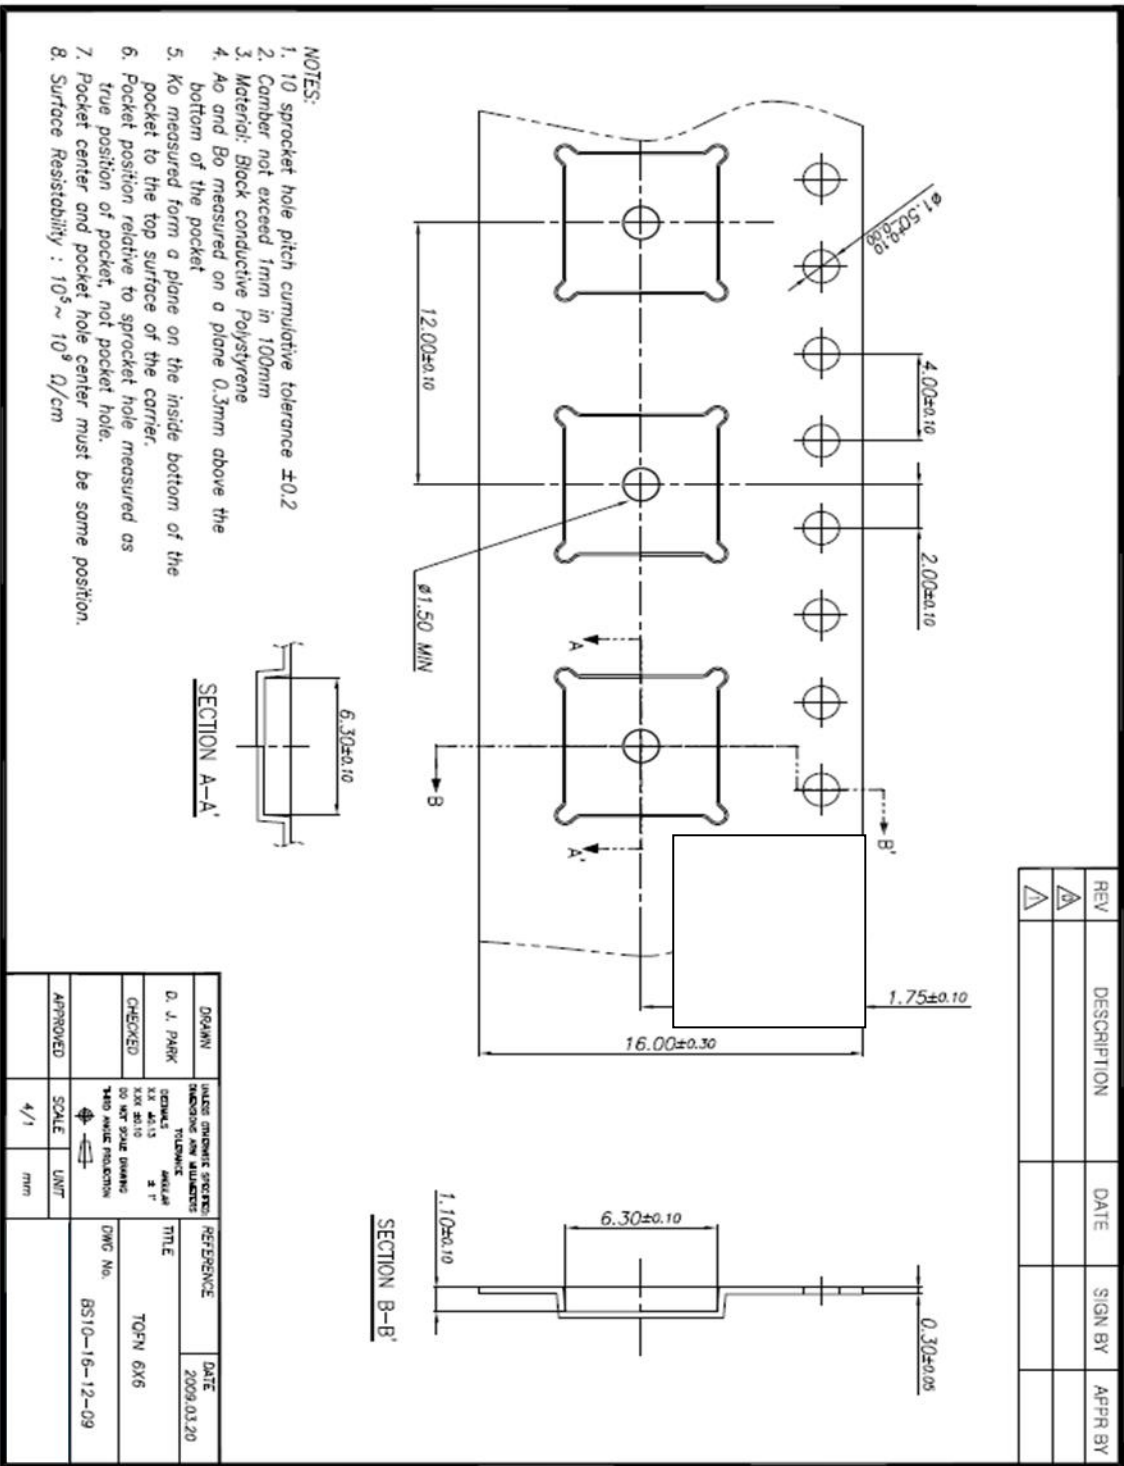


Packing Information

Attach 3

[Reel Drawing]

Size	16mm
A	330 ^{+0.2} _{-0.2}
B	1.5min
C	13.0 ^{+0.5} _{-0.2}
D	20.2min
N	100 ^{+3.0} _{-0.2}
W1	16.4 ^{+3.0} _{-0.0}
W2	20.4 ^{+2.0} _{-2.0}

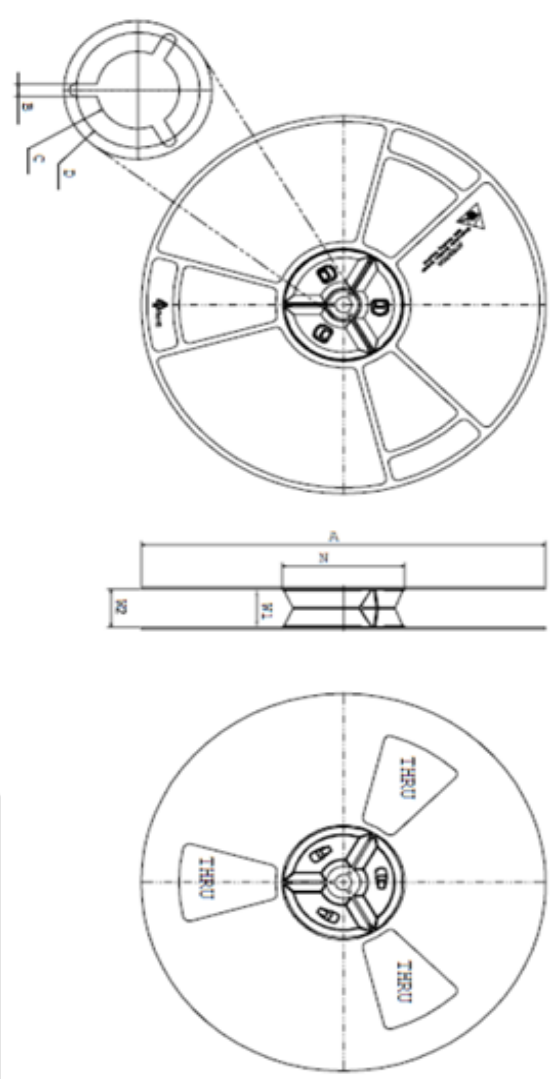

REMARKS

1. ALL DIMENSION MILLIMETER

2. SURFACE RESISTANCE : 10⁴ - 10⁹ Ω


REV. NO.	DESCRIPTION	DATE
1	INPUT SURFACE RESISTANCE RANGE	AUG.17, 2018
0	DRAWING RELEASED	AUG.06, 2017

CUSTOMER			
DATE	DRAWN BY	PART NO.	
AUG.06, 2017	Billy Cho	Lock Reel 13INCH x 4INCH-16mm	
DATE	CHECKED BY	DRAWING NO.	REV.NO.
AUG.06, 2017	Billy Cho	SMT1709203	1
DATE	APPROVED BY	RELEASED DATE	SCALE
AUG.06, 2017	IT Ryu	AUG.06, 2017	1:1
			SHEET
			1 of 1

Packing Information

Attach 4


[Cover Tape Drawing]

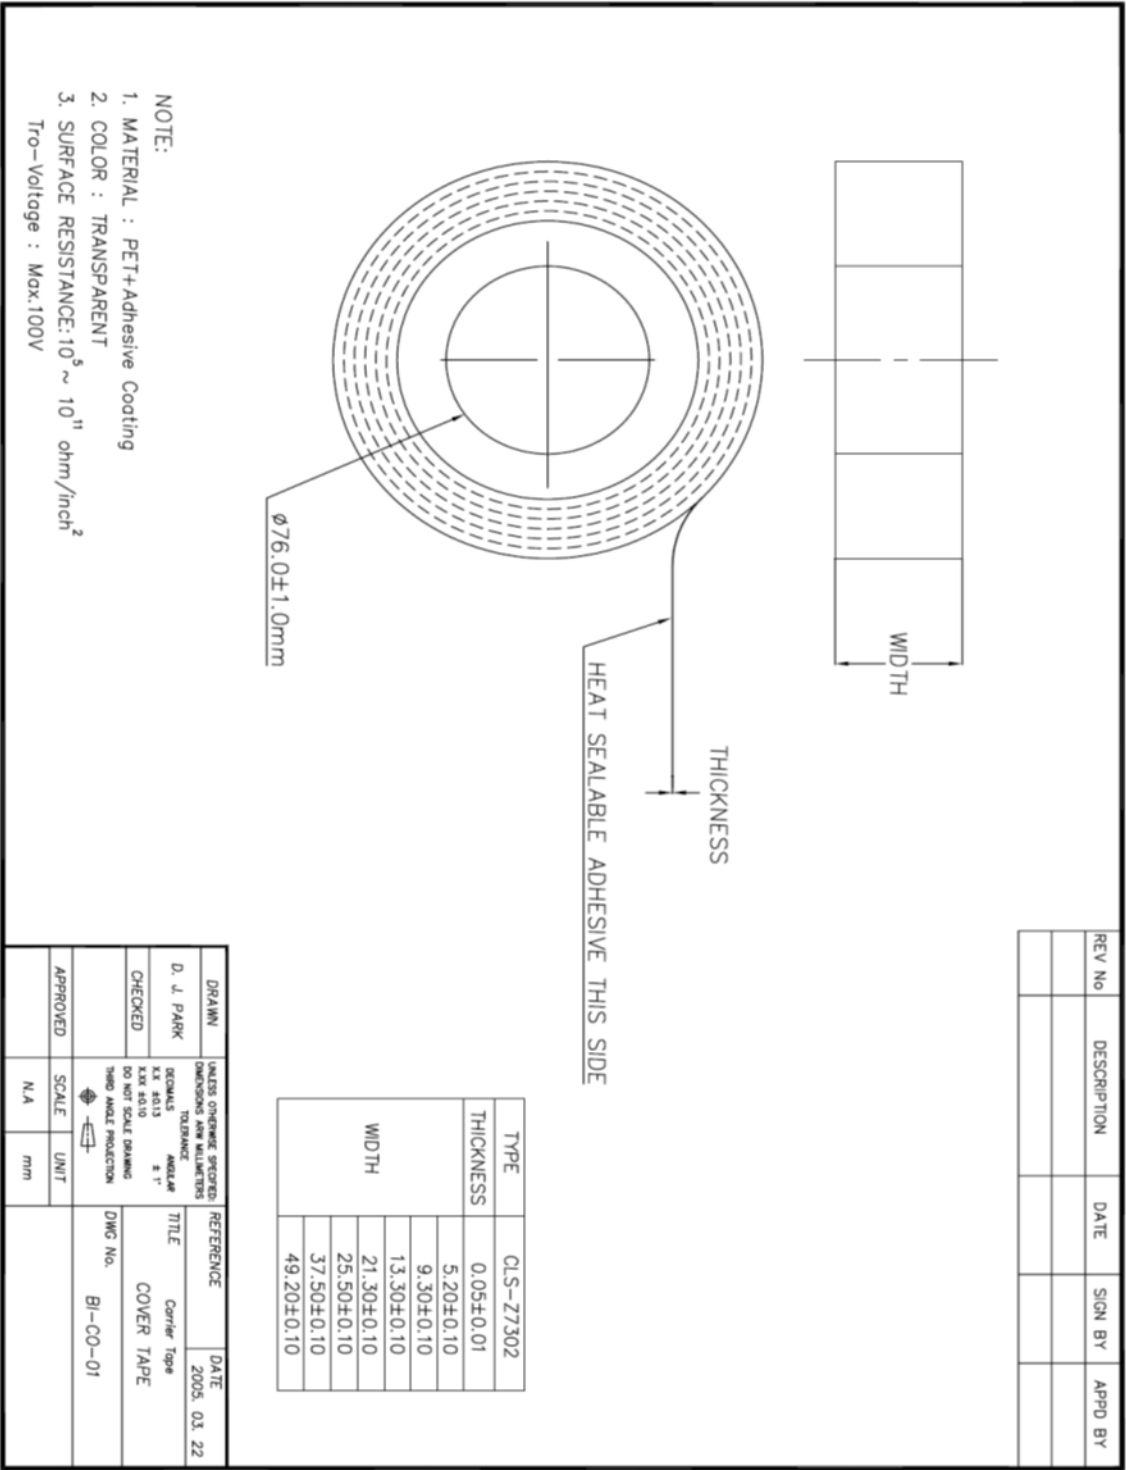

Packing Information

Attach 5


[Inner Box Drawing] _ Size : (350~370) * (338~350) * (50~52)

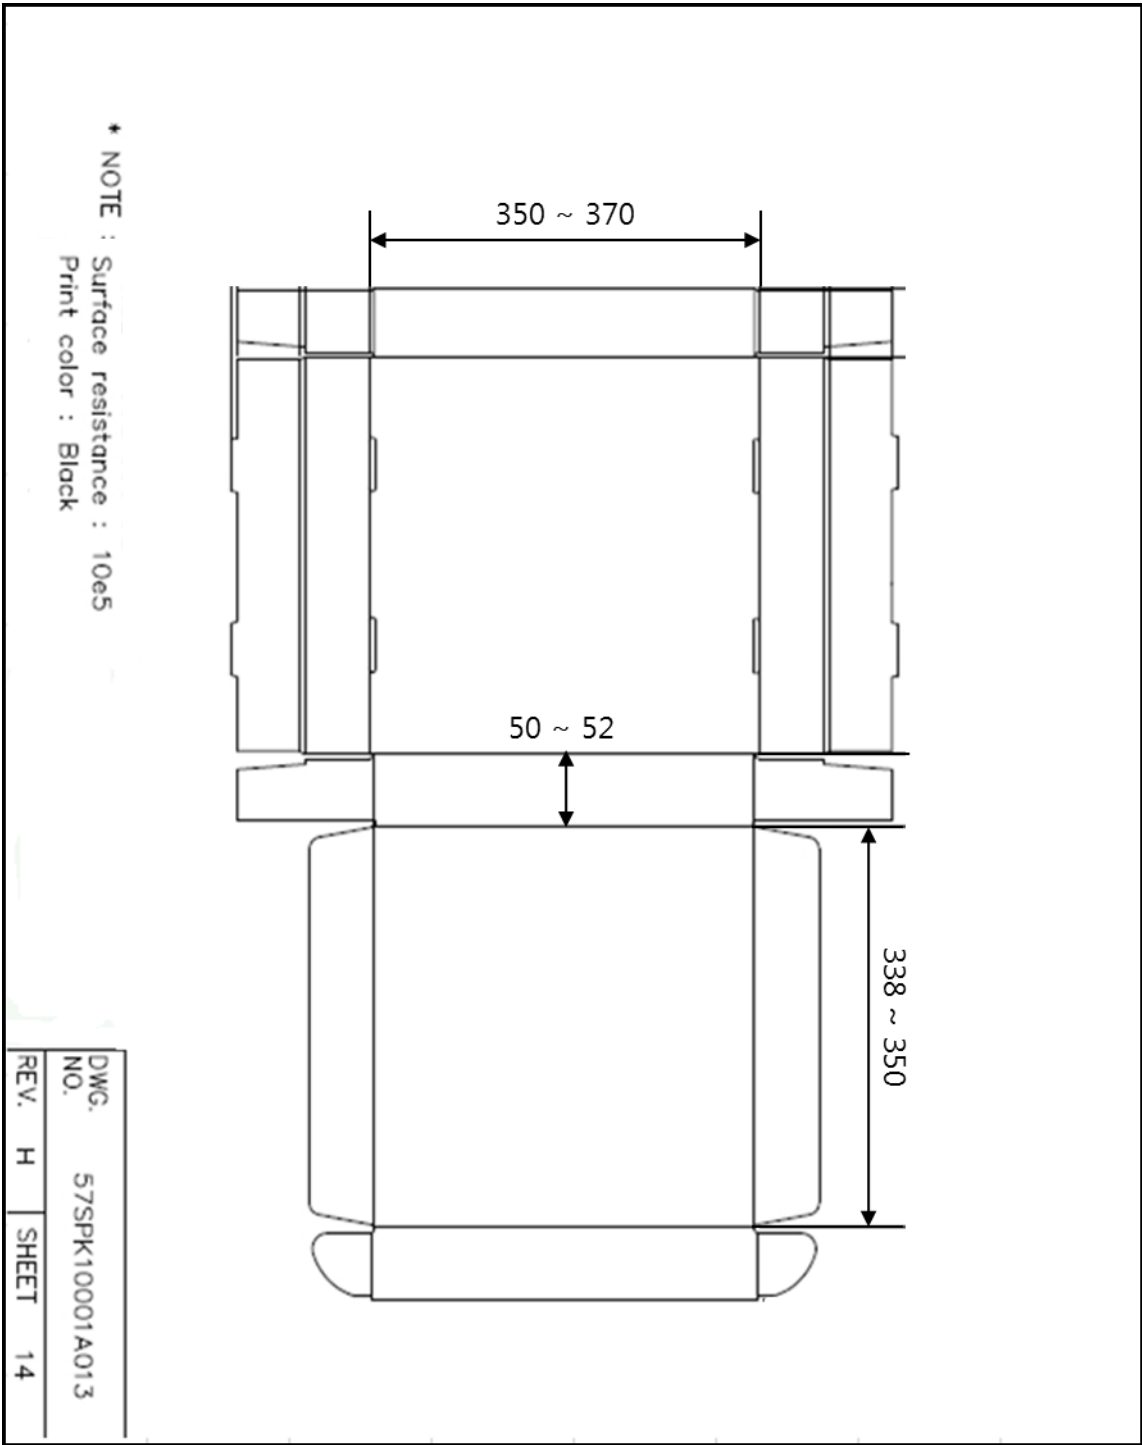

Packing Information

Attach 6

[Outer Box Drawing] _ Size : (375~390) * (335~345) * (360~390)

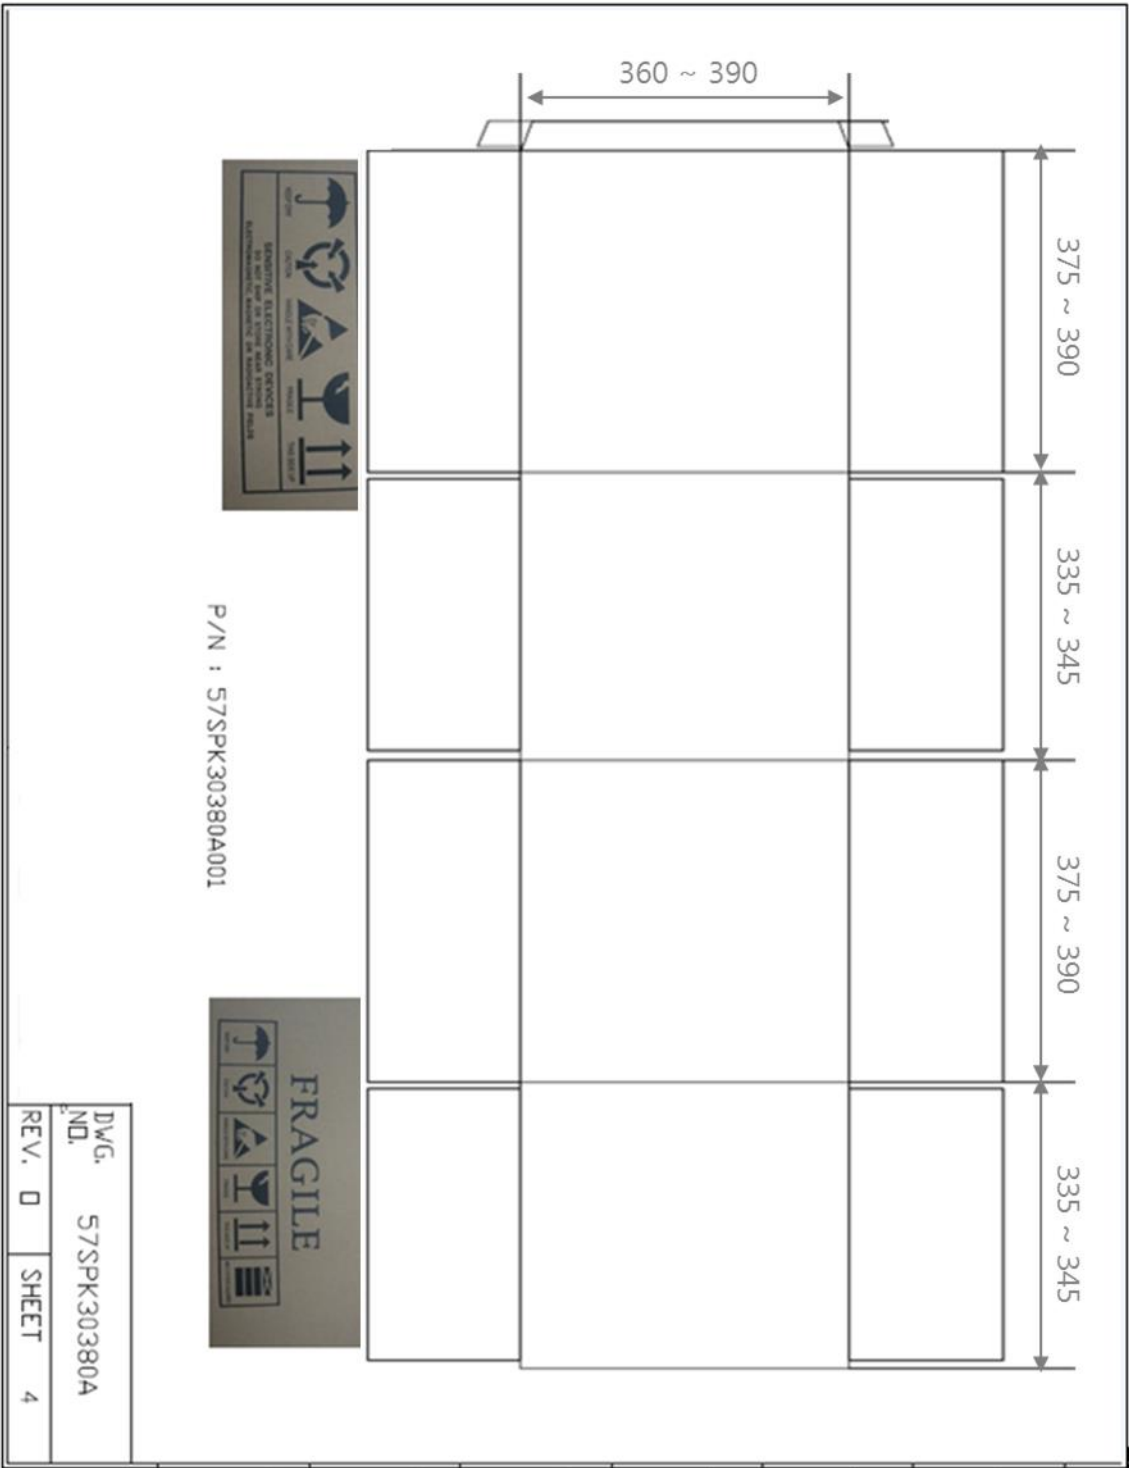

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

3. Barcode Information


(Total 2Page : 103-104)

Barcode Information

► Label Size : 80mm x 50mm


[Reel / MBB / Inner Box Label Barcode]

Standard Lot

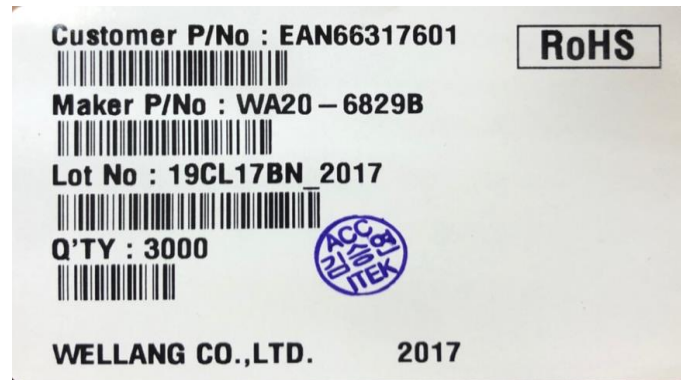


1. Customer P/No : This is optional, if our customer Requisition.
2. Maker P/No : This is Wellang's Part No.
3. Lot No. : This is Original Wafer Run No & Date code
4. Q'TY : This is PKG Q'ty in Reel / MBB / Inner Box
5. Wellang CO., LTD.
6. YYWW : This is PKG Ass'y manufacturing work week
7. RoHS

Merge Lot

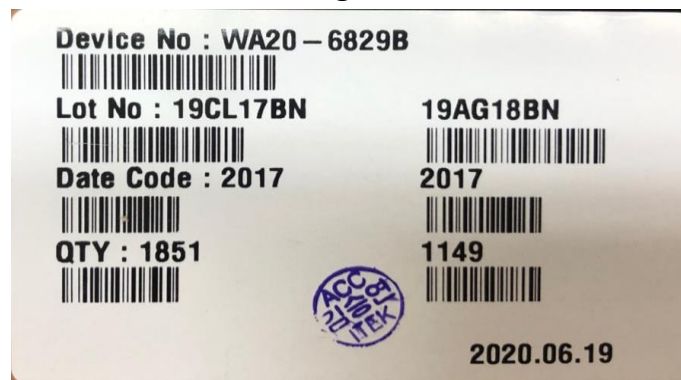

Barcode Information

[Outer Box Label Barcode]

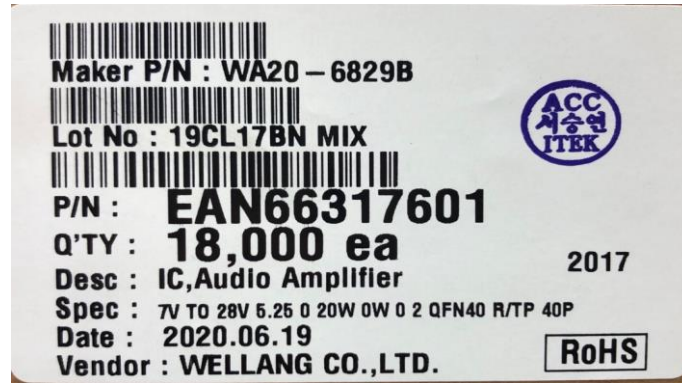


1. Maker P/N : This is Wellang's Part No.
2. Lot No. : This is Original Wafer Run No (Merge Lot : MIX marking)
3. P/N : Customer P/NO
4. Q'ty : This is PKG Q'ty in Outer Box.
5. Desc : Customer Class Name.
6. Spec : This is Wellang's Part Spec.
7. Date : This is label printing date.
8. Vendor : Wellang Co., LTD.
9. YYWW : This is PKG Ass'y manufacturing work week
10. RoHS

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

4. Part Structure

(Total 6Page : 106-111)

Marking Information

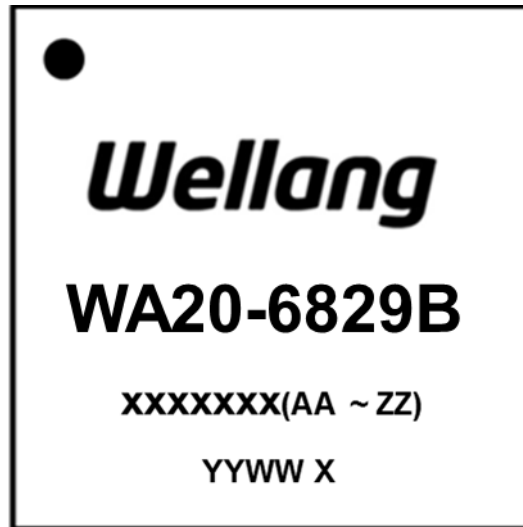

1. 1'st row : Wellang's LOGO
2. 2'nd row : WA20-6829B (Wellang's product code)
3. 3'rd row :
 - 3.1. Main Die Lot Number (Modulator Lo Number)
 - 3.1.1 When Main Die Lot is not split
 - xxxxxxx : Main Die Lot Number (Located at center)
 - The number of character is six~seven.(ex.196463)
 - 3.1.2 When Main Die Lot is split
 - xxxxxxx AA : Main Die Lot Number + AA (AB ~ ZZ)
 - No space after Mail Die Lot
4. 4'th row : Ass'y site and work week (YYWW X)
 - YYWW : "YY" is a year code / "WW" is a weekly code.
ex) Year 2019 / Work Week 35 → MARKING "1935"
 - X : PKG Ass'y site code (ex : "A" is ANST, "J" is JCET)
5. #1 pin marking size : PKG Site STD
6. Font style / Font size : PKG Site STD


Package External Image

1. Assembly site : ANST

[TOP Image]



[Bottom Image]

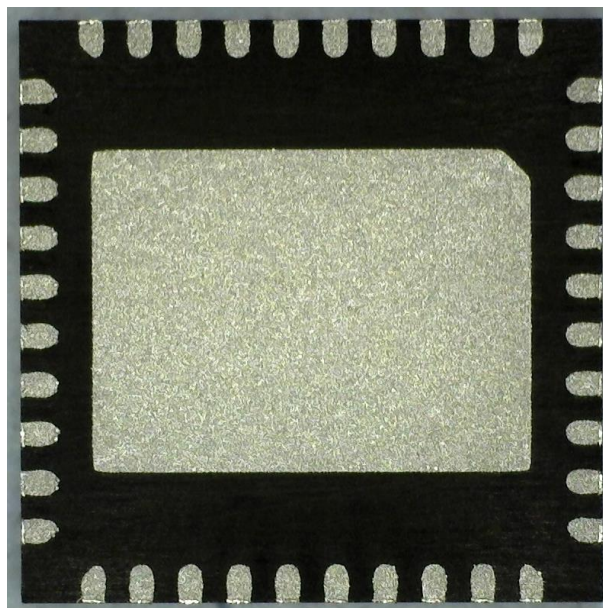


Package External Image

2. Assembly site : JCET

[TOP Image]




[Bottom Image]

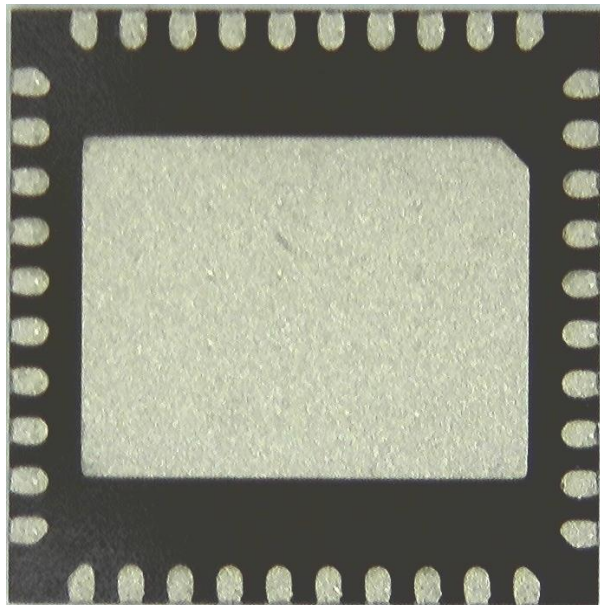


X-ray Image

1. Assembly site : ANST

[TOP Image]

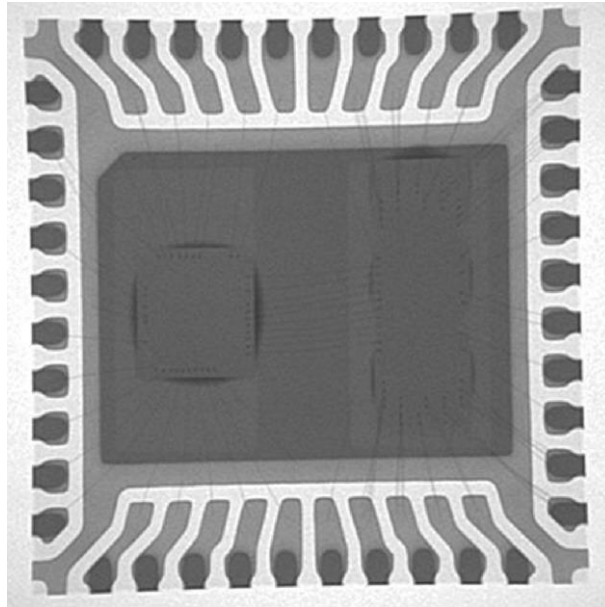


[Tilted Image]

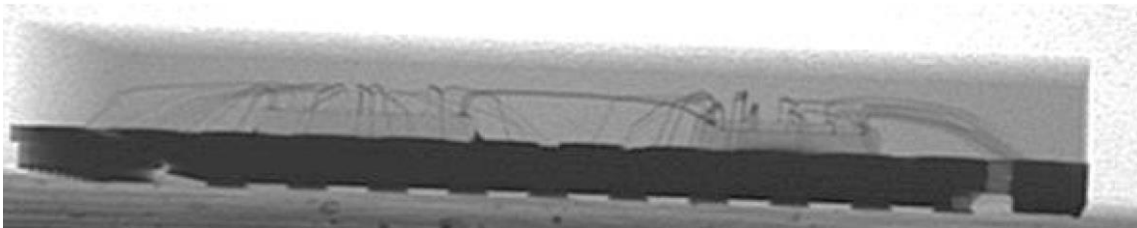


X-ray Image

2. Assembly site : JCET


[TOP Image]

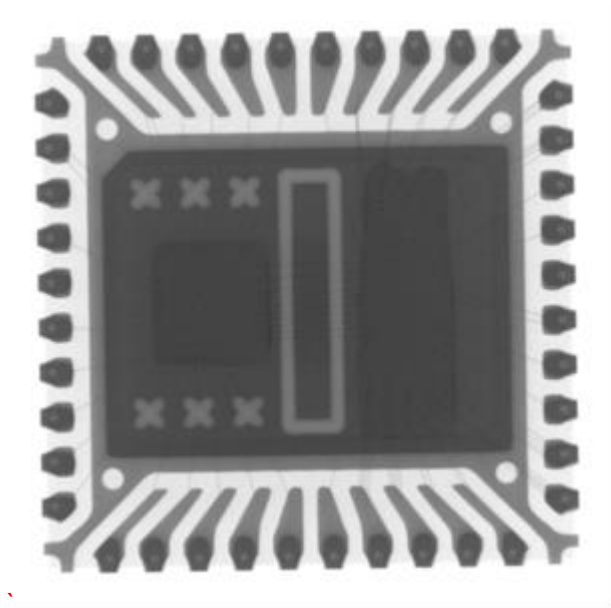

[Tilted Image]

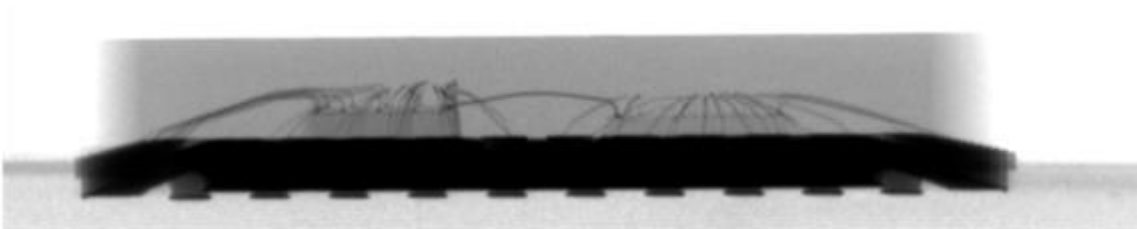

Part Structure Image

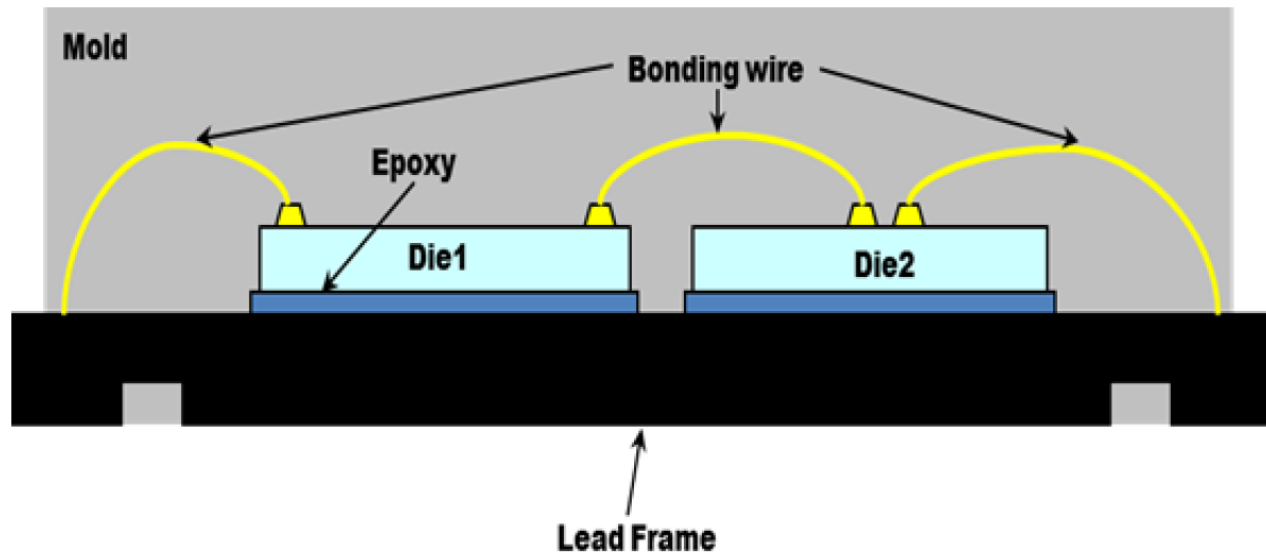

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

5. Reliability Test Report

(Total 2Page : 113-114)

	Reliability Test Report			Written by	Checked by	Approved by
				C.K.Baek	-	S.Y.Park

Purpose	The Qualification of a new product for <u>ANST</u>				
Product Name	WA20-6829B	Date	2020.06.11	Written by	Chang Ki Baek
Test Period	2019.09.24 ~ 2019.12.19	Q'ty [EA]	257	Result	Pass

1. Product Information

Product Name	WA20-6829B	Package Type	40QFN-EP
Assembly Site	<u>ANST</u> , JCET	FT Site	GMTEST, ITEK, OKINS, NOVASEMI

2. Power Die Information

Fab Site	DBHITEK	EDS Site	PFJ, NOVASEMI, OKINS
----------	---------	----------	----------------------

3. Modulator Information

Fab Site	DBHITEK	EDS Site	GMTEST, OKINS, NOVASEMI, ITEK
----------	---------	----------	-------------------------------

4. Reliability Test Items and Condition

TEST ITEM	TEST CONDITION	S/S	Result
HTOL	PVDD : 28V, VDD _{IO} : 3.6V, Temperature : T _J ≥ 125℃ ± 5℃ 1008hrs	77	Pass
HTS	Temperature : 150℃ 1008hrs	45	Pass
Pre-condition + THB	PVDD : 28V, VDD _{IO} : 3.6V, Temperature / Humidity : 85℃ / 85%RH 1008hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition. + UHAST	Temperature / Humidity : 130℃ / 85%RH 96hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition + TC	Temperature : -65℃ (15MIN) / 150℃ (15MIN) 500cycles (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass

5. Conclusion

5.1 HTOL/HTS/THB/UHAST/TC Test Pass

5.2 WA20-6829B Qualified

	Reliability Test Report			Written by	Checked by	Approved by
				C.K. Baek	-	S.Y.Park

Purpose	The Qualification of a new product for <u>JCET</u>				
Product Name	WA20-6829B	Date	2021.04.05	Written by	Chang Ki Baek
Test Period	2021.01.28 ~ 2021.04.02	Q'ty [EA]	257	Result	Pass

1. Product Information

Product Name	WA20-6829B	Package Type	40QFN-EP
Assembly Site	ANST, <u>JCET</u>	FT Site	GMTEST, ITEK, OKINS, NOVASEMI

2. Power Die Information

Fab Site	DBHITEK	EDS Site	PFJ, NOVASEMI, OKINS
----------	---------	----------	----------------------

3. Modulator Information

Fab Site	DBHITEK	EDS Site	GMTEST, OKINS, NOVASEMI, ITEK
----------	---------	----------	-------------------------------

4. Reliability Test Items and Condition

TEST ITEM	TEST CONDITION	S/S	Result
HTOL	PVDD : 28V, VDD _{IO} : 3.6V, Temperature : T _J ≥ 125℃ ± 5℃ 1008hrs	77	Pass
HTS	Temperature : 150℃ 1008hrs	45	Pass
Pre-condition + THB	PVDD : 28V, VDD _{IO} : 3.6V, Temperature / Humidity : 85℃ / 85%RH 1008hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition. + UHAST	Temperature / Humidity : 130℃ / 85%RH 96hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition + TC	Temperature : -65℃ (15MIN) / 150℃ (15MIN) 500cycles (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass

5. Conclusion

5.1 HTOL/HTS/THB/UHAST/TC Test Pass

5.2 WA20-6829B Qualified

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

6. MSL Test Report

(Total 5Page : 116-120)

	MSL3 Test Report			Written by	Checked by	Approved by
				C.K.Baek	-	S.Y.Park
Purpose	The Qualification of a new product for <u>ANST</u>					
Product Name	WA20-6829B	Date	2020.06.11	Written by	Chang Ki Baek	
Test Period	2019.09.24 ~ 2019.12.19	Q'ty [EA]	225	Result	Pass	

1. Product Information

Product Name	WA20-6829B	Package Type	40QFN-EP
Assembly Site	<u>ANST</u> , JCET	FT Site	GMTEST, ITEK, OKINS, NOVASEMI

2. Power Die Information

Fab Site	DBHITEK	EDS Site	PFJ, NOVASEMI, OKINS
----------	---------	----------	----------------------

3. Modulator Information

Fab Site	DBHITEK	EDS Site	GMTEST, OKINS, NOVASEMI, ITEK
----------	---------	----------	-------------------------------

4. Reliability Test Items and Condition

TEST ITEM	TEST CONDITION	S/S	Result
MSL 3 Test (Report Marking _Pre-condition)	Bake Temperature : 125℃ 24 hours Soak (Temperature / Humidity 30℃/60%RH 192hrs) IR Reflow 10Cycles	135 (THB+ UHASt+TC)	Pass
Pre-condition + THB	PVDD : 28V, VDD _{IO} : 3.6V, Temperature / Humidity : 85℃ / 85%RH 1008hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition. + UHASt	Temperature / Humidity : 130℃ / 85%RH 96hrs (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass
Pre-condition + TC	Temperature : -65℃(15MIN) / 150℃(15MIN) 500cycles (Pre-condition Level 3, Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45	Pass

5. Conclusion

5.1 MSL3/THB/UHASt/TC Test Pass

5.2 WA20-6829B Qualified

	MSL3 Test Report			Written by	Checked by	Approved by
				C.K Baek	-	S.Y.Park
Purpose	The Qualification of a new product for <u>JCET</u>					
Product Name	WA20-6829B	Date	2021.04.05	Written by	Chang Ki Baek	
Test Period	2021.01.28 ~ 2021.04.02	Q'ty [EA]	135	Result	Pass	

1. Product Information

Product Name	WA20-6829B	Package Type	40QFN-EP
Assembly Site	ANST, <u>JCET</u>	FT Site	GMTEST, ITEK, OKINS, NOVASEMI

2. Power Die Information

Fab Site	DBHITEK	EDS Site	PFJ, NOVASEMI, OKINS
----------	---------	----------	----------------------

3. Modulator Information

Fab Site	DBHITEK	EDS Site	GMTEST, OKINS, NOVASEMI, ITEK
----------	---------	----------	-------------------------------

4. Reliability Test Items and Condition

TEST ITEM	TEST CONDITION	S/S	Result
MSL 3 Test (Report Marking _Pre-condition)	Bake Temperature : 125℃ 24 hours Soak (Temperature / Humidity 30℃/60%RH 192hrs) IR Reflow 10Cycles	135*1Lot (THB+ UHASt+TC)	Pass
Pre-condition + THB	PVDD : 28V, VDD _{IO} : 3.6V, Temperature / Humidity : 85℃ / 85%RH 1008hrs (Pre-condition Level 3, TC : -40℃ ~ 60℃ 5cycle Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45*1Lot	Pass
Pre-condition. + UHASt	Temperature / Humidity : 130℃ / 85%RH 96hrs (Pre-condition Level 3, TC : -40℃ ~ 60℃ 5cycle Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45*1Lot	Pass
Pre-condition + TC	Temperature : -65℃(15MIN) / 150℃(15MIN) 500cycles (Pre-condition Level 3, TC : -40℃ ~ 60℃ 5cycle Temperature / Humidity : 30℃ / 60%RH 192Hrs, Reflow 10Cycles)	45*1Lot	Pass


5. Conclusion

5.1 MSL3/THB/UHASt/TC Test Pass

5.2 WA20-6829B Qualified

SAT Image


1. Assembly site : ANST

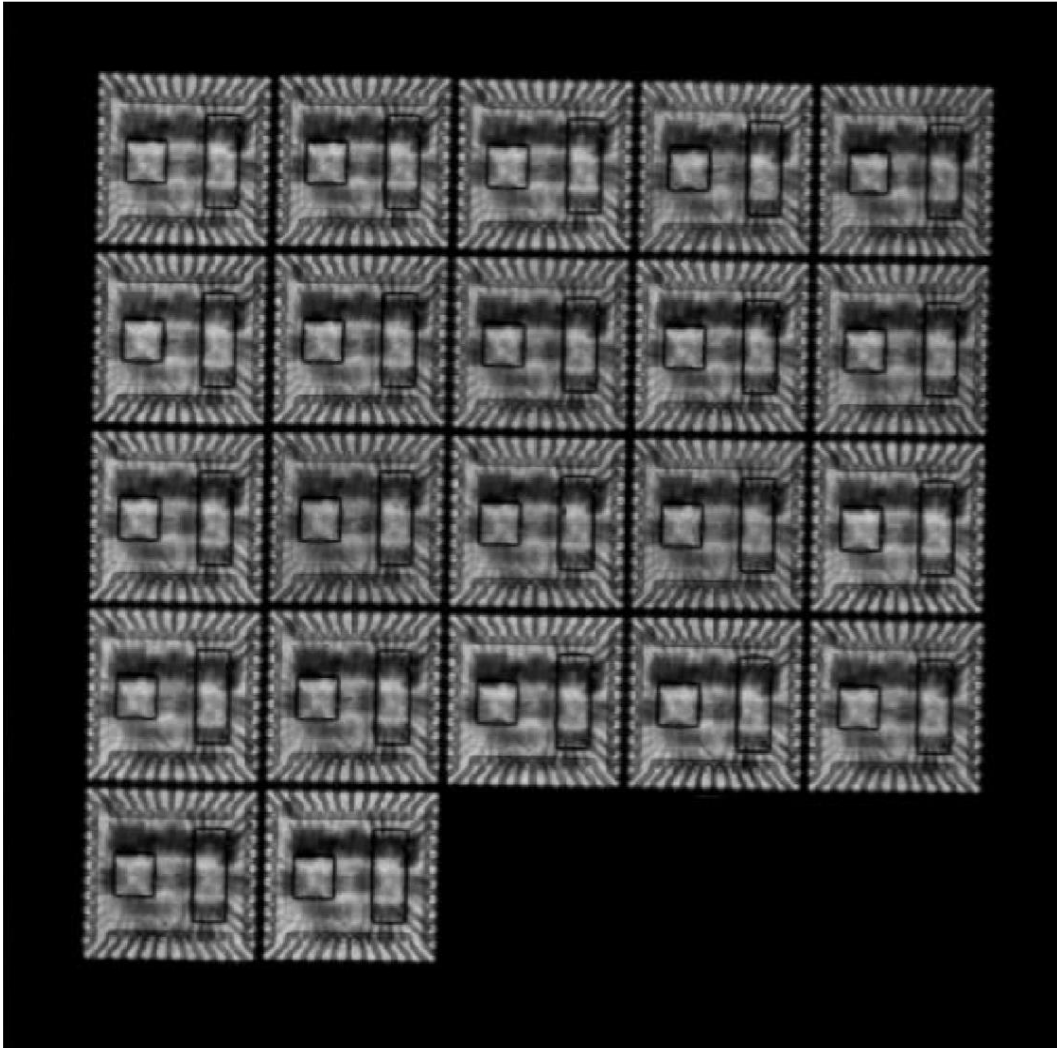

[SAT Image @after Precondition]


SAT Image

2. Assembly site : JCET

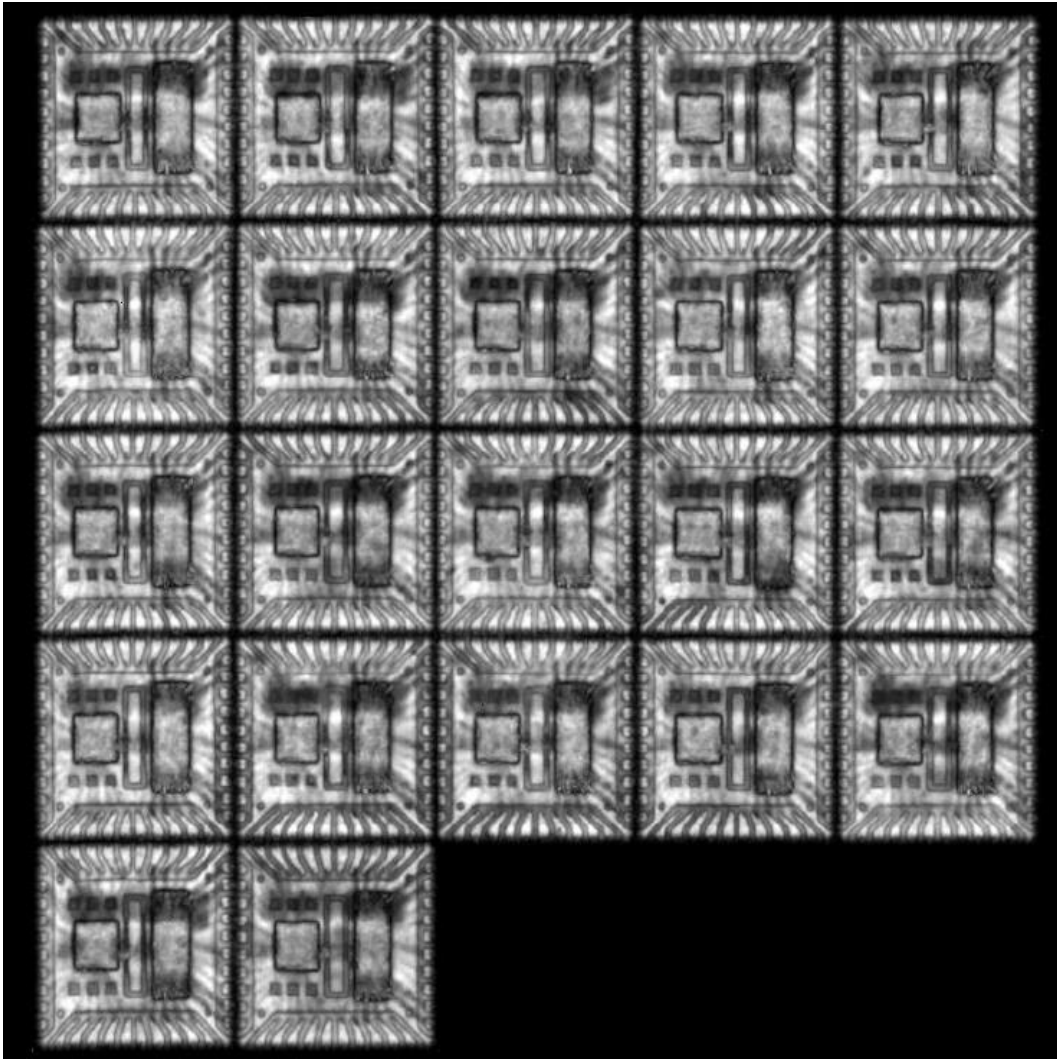

[SAT Image @after Precondition]

Reflow Profile

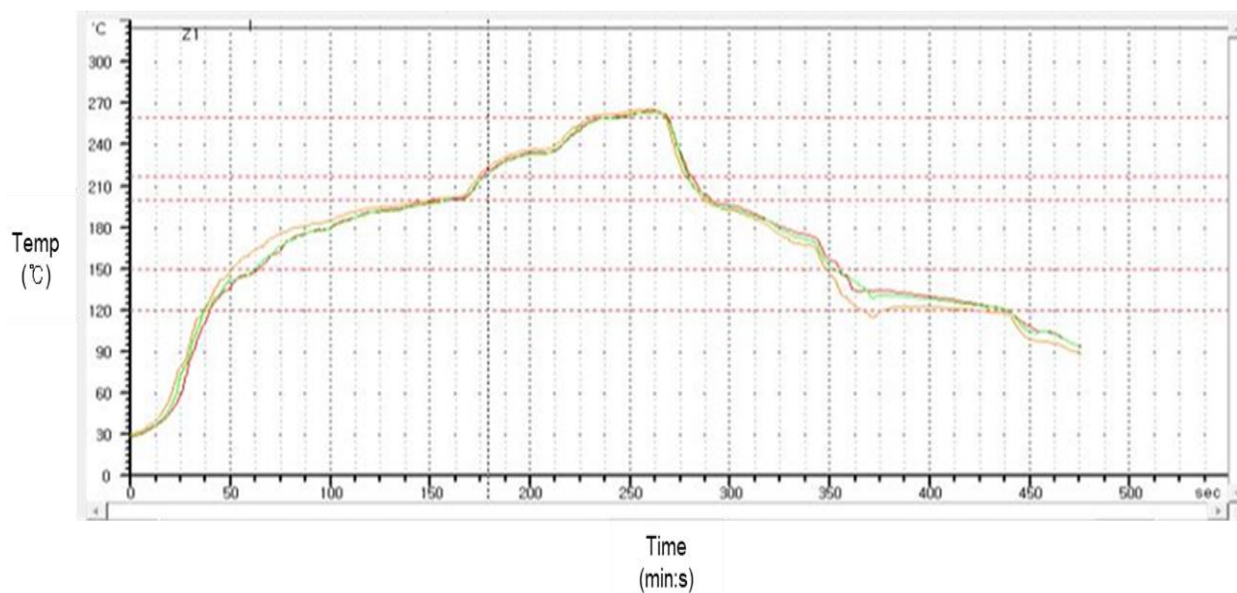

Item	Preheat/Soak	Ramp-up rate	217°C Maintained above	Peak package body temperature	Retention time of 255°C	Ramp-down rate
Scope	150°C~200°C 60-120 s	3 °C/s max.	217°C 60-150 s	260°C or more	30 s more	6 °C/s max.
Channel #1	95.00	0.70	104.00	264.30	43.00	-4.10
Channel #2	99.00	0.70	103.00	265.80	44.00	-5.20
Channel #3	103.00	0.60	101.00	263.10	40.00	-6.90

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07

7. ESD Test Report

(Total 1Page : 122)

	ESD Test Report			Written by	Checked by	Approved by
				C.K.Baek	-	S.Y.Park
Purpose	The Qualification of a new product					
Product Name	WA20-6829B	Date	2020.06.11	Written by	Chang Ki Baek	
Test Period	2019.09.24 ~ 2019.12.19	Q'ty	27	Result	Pass	

1. Product Information

Product Name	WA20-6829B	Package Type	40QFN-EP
Assembly Site	ANST, JCET	FT Site	GMTEST, ITEK, OKINS, NOVASEMI

2. Power Die Information

Fab Site	DBHITEK	EDS Site	PFJ, NOVASEMI, OKINS
----------	---------	----------	----------------------

3. Modulator Information

Fab Site	DBHITEK	EDS Site	GMTEST, OKINS, NOVASEMI, ITEK
----------	---------	----------	-------------------------------

4. Reliability Test Items and Condition

TEST ITEM	TEST CONDITION	S/S	Result
ESD	HBM (±2000V)	9	Pass
	MM (±200V)	9	Pass
	CDM (±500V)	3	Pass
	Latch-up (V-Test, I-Test)	6	Pass

5. Conclusion

5.1 ESD HBM/MM/CDM/Latch-up Test Pass

5.2 WA20-6829B Qualified

	Approval Sheet	Rev.	1.0
		Model	WA20-6829B
		Date	2021.04.07


8. Actual Exterior Measures

(Total 1Page : 124)

Package Dimension Actual Measure

▶ Device : WA20-6829B

▶ Package Type : 40QFN-EP

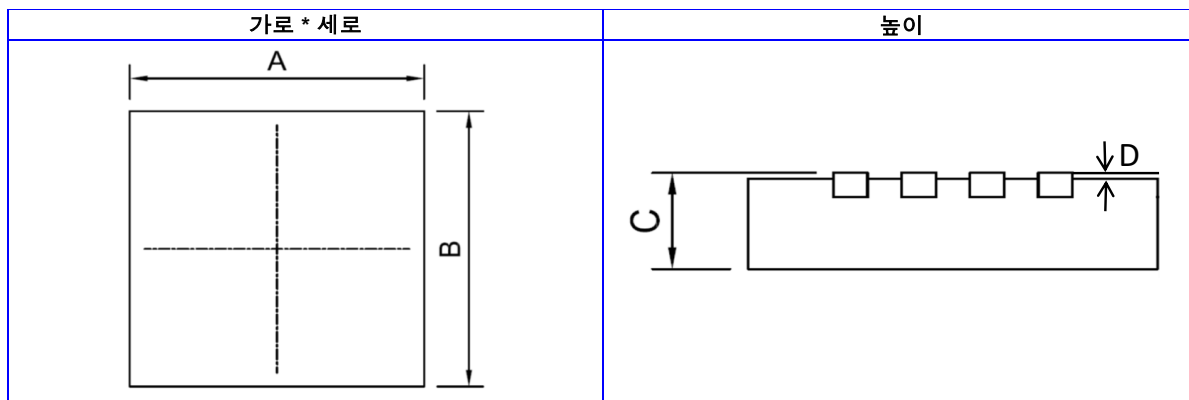

■ Actual PKG Dimension Data

	ANST				JCET				
	A	B	C	D	A	B	C	D	unit
Spec. Min.	5.95	5.95	0.8	0.00	5.95	5.95	0.8	0.00	mm
Spec. Max.	6.05	6.05	0.9	0.05	6.05	6.05	0.9	0.05	mm
Sample1	5.99	5.99	0.84	0.03	6.00	5.99	0.86	0.02	mm
Sample2	5.99	5.99	0.84	0.02	6.01	6.01	0.86	0.03	mm
Sample3	5.99	5.99	0.83	0.02	6.00	5.99	0.86	0.02	mm
Sample4	5.99	5.99	0.83	0.03	5.99	6.00	0.86	0.02	mm
Sample5	5.99	5.99	0.84	0.02	5.98	5.98	0.85	0.03	mm
Sample6	5.98	5.99	0.84	0.03	5.99	5.98	0.86	0.02	mm
Sample7	5.98	5.99	0.83	0.02	6.00	5.99	0.86	0.03	mm
Sample8	5.98	5.99	0.84	0.02	6.01	6.00	0.86	0.02	mm
Sample9	5.98	5.98	0.83	0.03	5.99	6.00	0.86	0.02	mm
Sample10	5.98	5.98	0.84	0.03	5.98	5.99	0.86	0.03	mm
Sample11	5.99	5.98	0.84	0.03	6.01	5.99	0.86	0.03	mm
Sample12	5.99	5.98	0.83	0.03	6.01	6.00	0.86	0.02	mm
Sample13	5.98	5.98	0.83	0.03	6.00	6.00	0.86	0.02	mm
Sample14	5.99	5.99	0.84	0.02	6.01	6.00	0.86	0.02	mm
Sample15	5.98	5.99	0.84	0.02	5.98	5.98	0.85	0.03	mm
Sample16	5.98	5.98	0.84	0.03	5.99	5.98	0.86	0.02	mm
Sample17	5.98	5.98	0.83	0.02	6.00	5.99	0.86	0.03	mm
Sample18	5.99	5.99	0.84	0.02	5.99	6.00	0.85	0.03	mm
Sample19	5.99	5.99	0.84	0.03	5.98	5.97	0.86	0.02	mm
Sample20	5.99	5.99	0.84	0.03	5.99	5.99	0.86	0.02	mm
Sample21	5.99	5.99	0.84	0.02	5.98	5.98	0.86	0.02	mm
Sample22	5.99	5.98	0.83	0.02	6.01	6.01	0.85	0.02	mm
Sample23	5.98	5.99	0.83	0.03	5.99	5.98	0.86	0.02	mm
Sample24	5.98	5.99	0.84	0.02	5.99	5.99	0.86	0.02	mm
Sample25	5.98	5.98	0.83	0.03	6.00	6.00	0.85	0.02	mm
Sample26	5.99	5.98	0.84	0.03	5.99	6.00	0.86	0.02	mm
Sample27	5.98	5.99	0.84	0.02	5.99	5.98	0.86	0.02	mm
Sample28	5.98	5.98	0.84	0.02	6.00	5.99	0.86	0.03	mm
Sample29	5.99	5.98	0.83	0.02	6.00	6.00	0.85	0.02	mm
Sample30	5.98	5.98	0.83	0.03	5.99	5.99	0.86	0.03	mm
Min	5.98	5.98	0.83	0.02	5.98	5.97	0.85	0.02	mm
Max	5.99	5.99	0.84	0.03	6.01	6.01	0.86	0.03	mm
Avg	5.99	5.99	0.84	0.02	5.99	5.99	0.86	0.02	mm