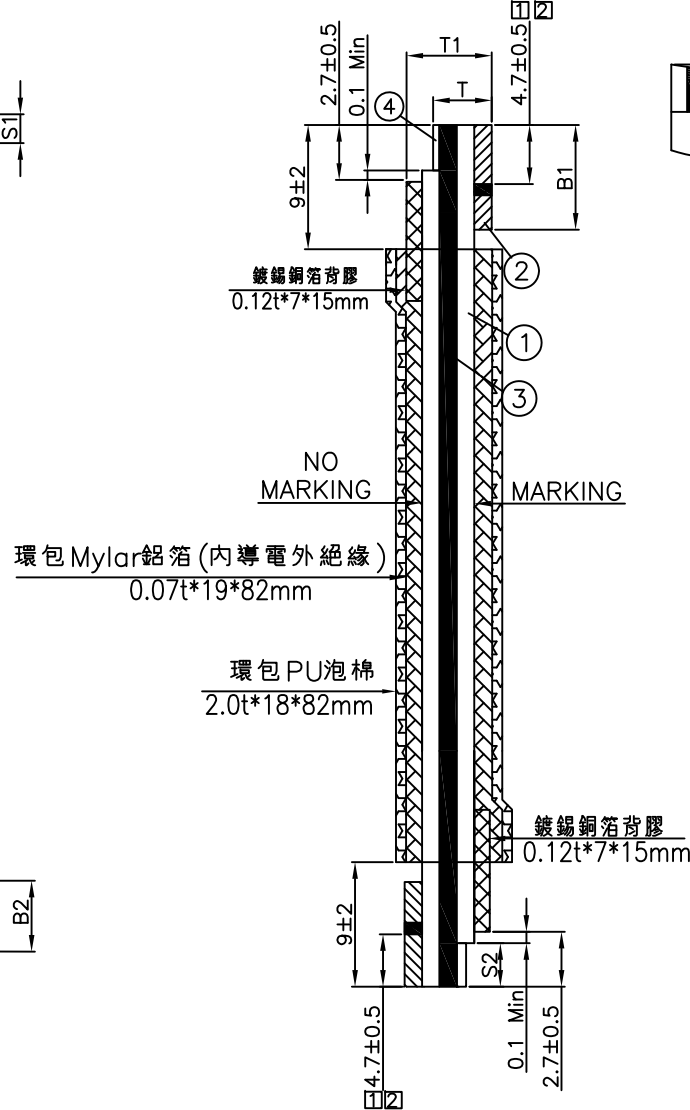
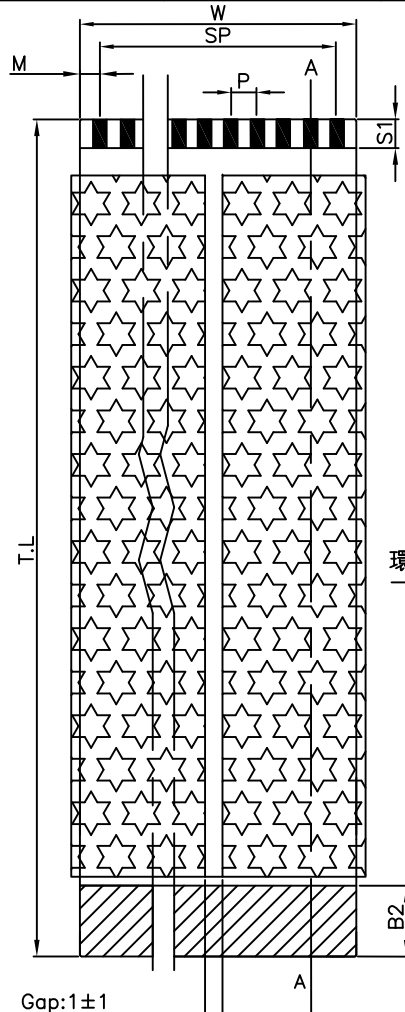


STRUCTURE			
NO	ITEM NAME	SPECIFICATION	REMARK
1	INSULATION	PET(UL 20861)	105°C.60V
2	P/TAPE	PET	

3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		

DIMENSION				
PITCH	P	0.5	±0.05	
SPAN	SP	7.0	±0.05	
WIDTH	W	8.0	±0.10	
MARGIN	☒ M	0.5	±0.10	
INSERT THICKNESS	T	0.3	±0.05	
	☒ T1	0.5	±0.05	
PROTECTOR LENGTH	☒ B1	8.0	±1.0	
	☒ B2	8.0	±1.0	
STRIP LENGTH	☒ S1	2.2	±0.5	
	☒ S2	2.2	±0.5	
TOTAL LENGTH	T.L	100.0	±2.0	
NO of PIN	15P			

NOTES:

1.Impedance Spec:50± 15Ω

2.☒ 為重點管控尺寸

3.成品補強板上畫黑線(不含線寬),線寬LW=0.5mm,如圖示

4.成品S1&S2端鍍錫銅箔需導通

Gap:1±1
接口 No Marking面

☒	改劃線尺寸	21/07/20
☒	改劃線尺寸	21/06/01
SER	DESCRIPTION	DATE

376.00039.005				P-TWO INDUSTRIES INC.			
CUSTOMER DRAWING				APPROVED BY Charles Lee			
				CHECKED BY Samuel Hung			
				DRAWN BY Damon Miao			
				PART NO 183005-15089			
				DRAWN DATE 2021/07/20			
				REV X3			
				SHEET 1/1			
				SCALE -			
				PAGE -			

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
X.X	±0.25
X.XX	±0.15
X.XXX	±0.10
ANG.	±0°30'
UNIT	mm
SIZE	A4
SER	DESCRIPTION
DRAWN BY	