
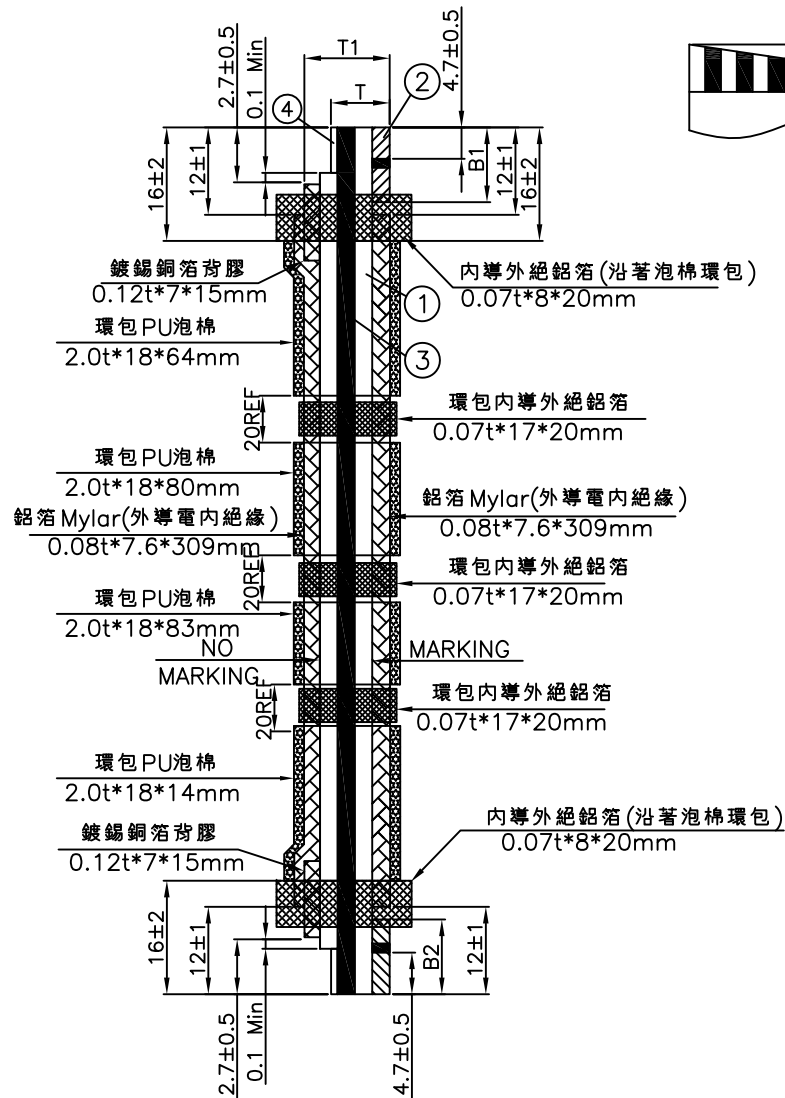


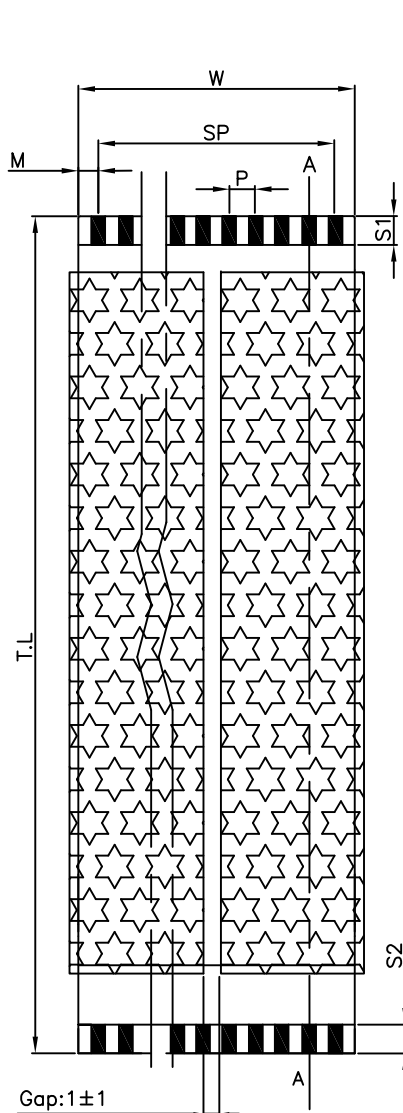

STRUCTURE			
NO	ITEM NAME	SPECIFICATION	REMARK
1	INSULATION	PET(UL20861)	105°C.60V
2	P/TAPE	PET	

3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		


DIMENSION			
PITCH	P	0.5	±0.05
SPAN	SP	7.0	±0.05
WIDTH	W	8.0	±0.1
MARGIN	☒ M	0.5	±0.1
INSERT THICKNESS	T	0.3	±0.05
	☒ T1	0.5	±0.05
PROTECTOR LENGTH	☒ B1	7.0	±1.0
	☒ B2	7.0	±1.0
STRIP LENGTH	☒ S1	2.2	±0.5
	☒ S2	2.2	±0.5
TOTAL LENGTH	T.L	333.0	±2.0
NO of PIN	15P		

NOTES:

- 成品補強板上畫白線(不含線寬),線寬LW=0.5mm,如圖示
- ☒為重點管控尺寸
- Impedance Spec: 50±15Ω
- 成品S1&S2端鍍錫銅箔需導通

SECTION A-A

CUSTOMER DARWING				P-TWO INDUSTRIES INC.			
CUSTOMER DRAWING				TITLE			
Charles Lee				APPROVED BY			
APPROVED BY				CHECKED BY			
Damon Miao				DRAWN BY			
DRAWN BY				PART NO			
2021/04/26				183005-15090			
REV X1				SCALE			
1/2				PAGE			
-							

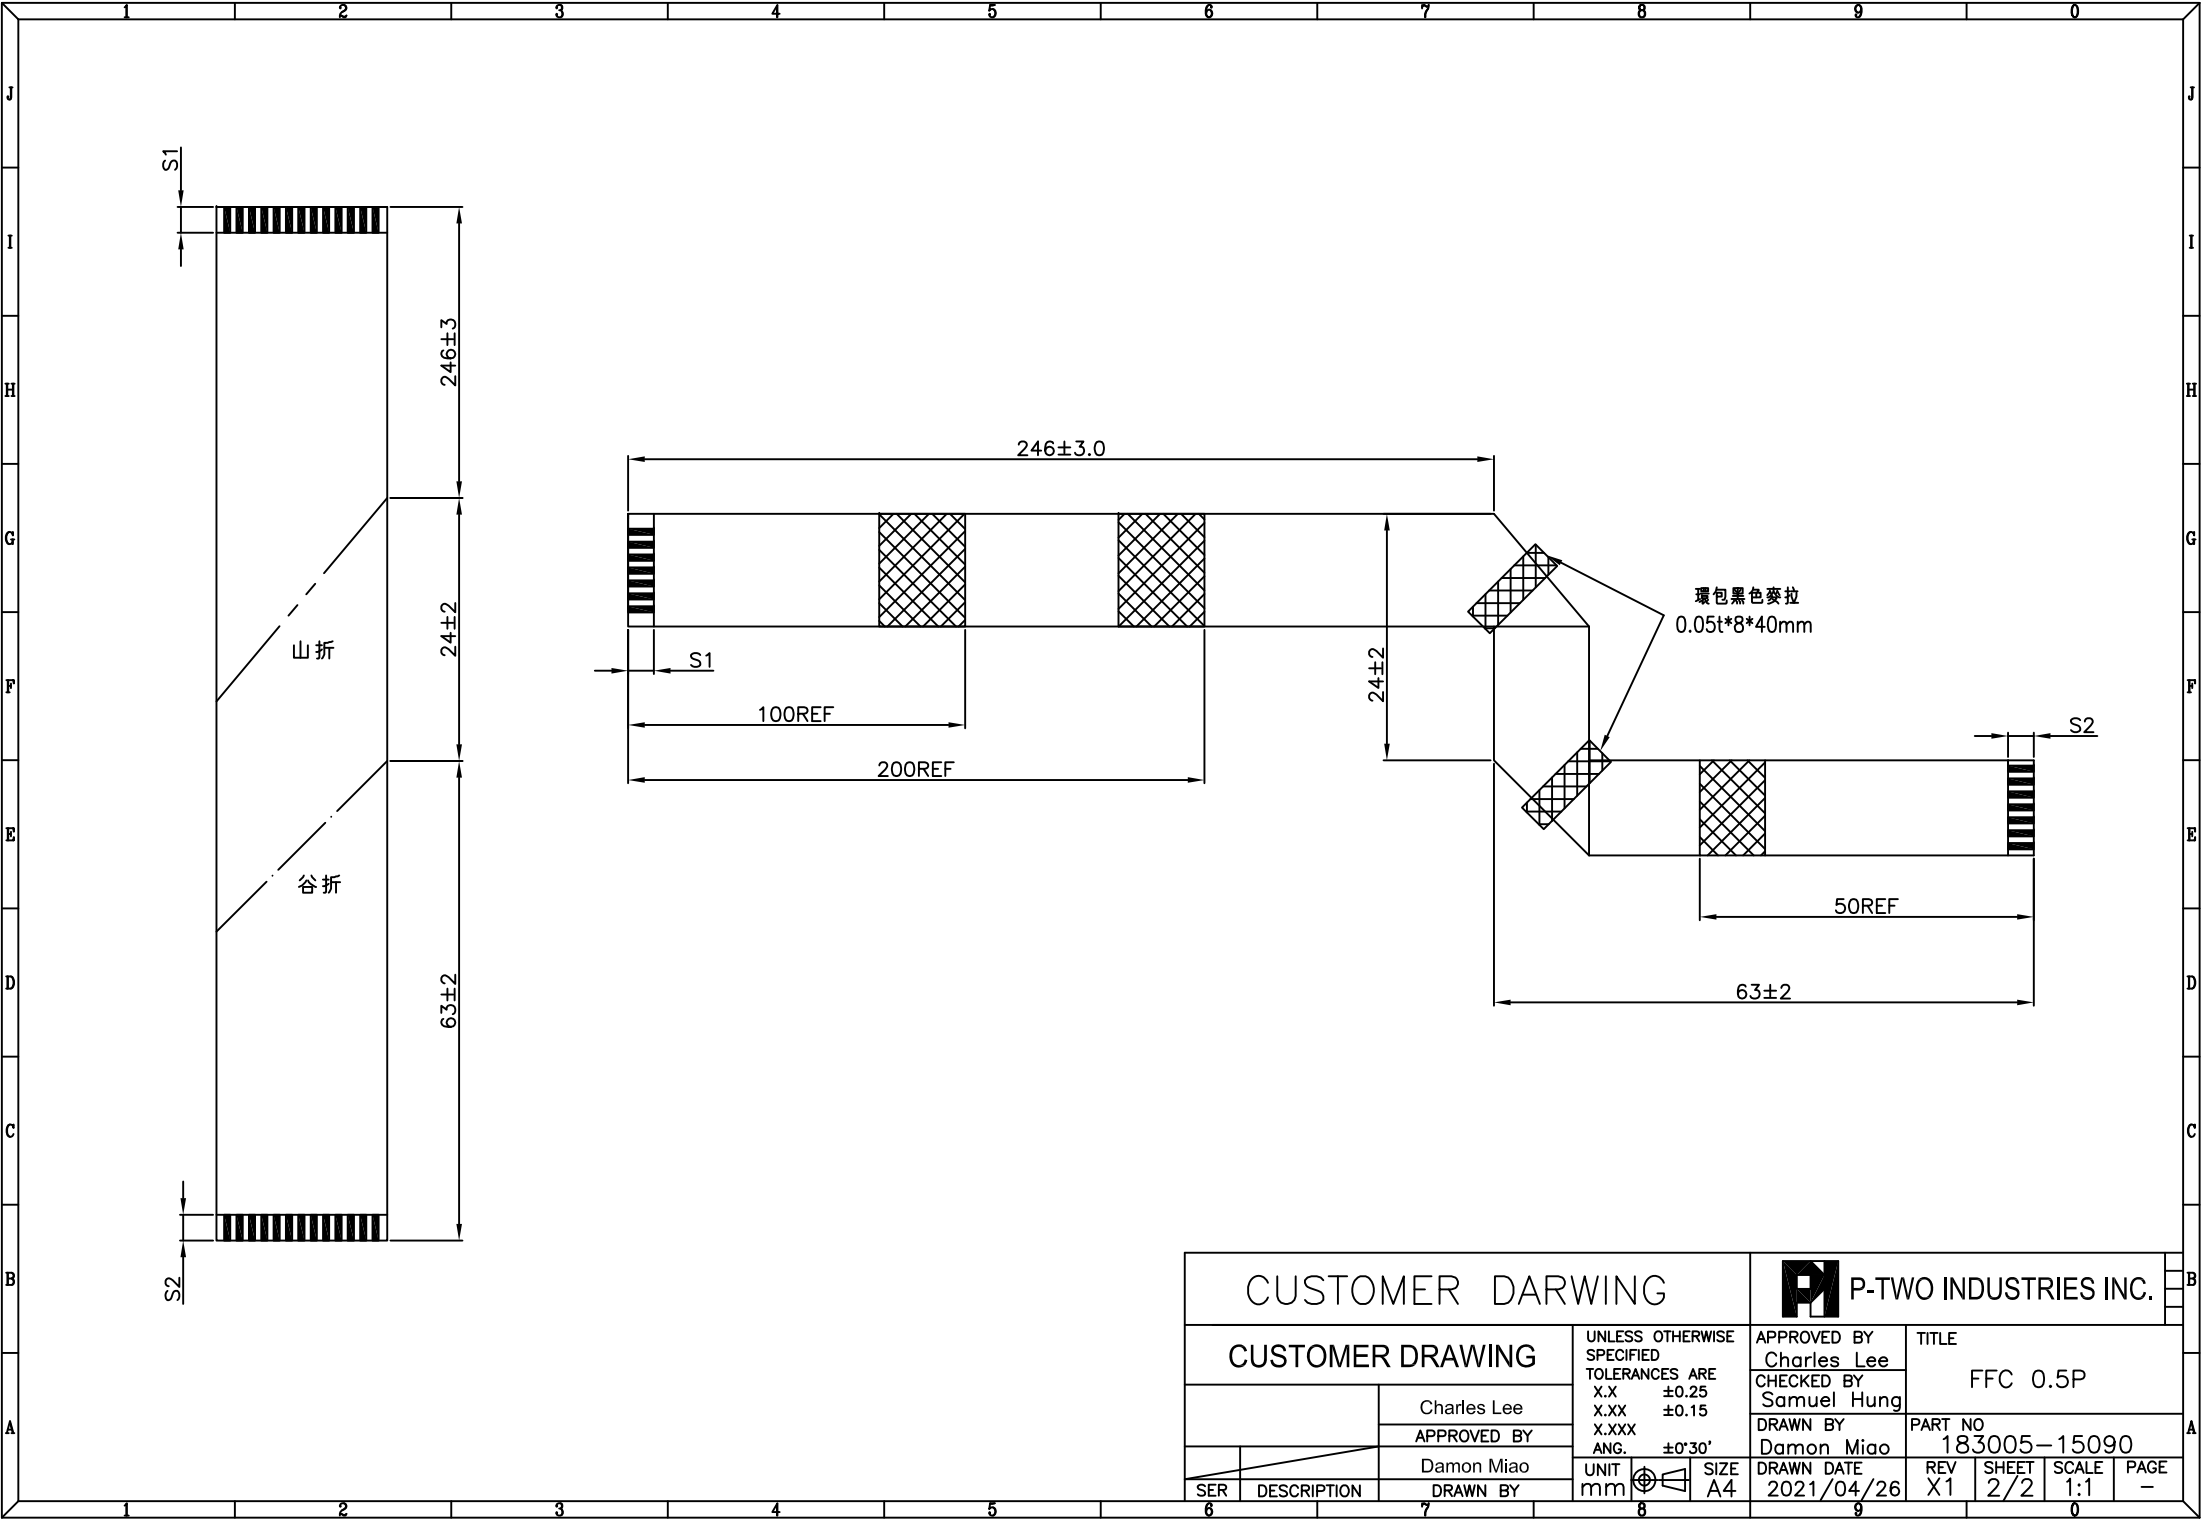

CUSTOMER DARWING				P-TWO INDUSTRIES INC.			
CUSTOMER DRAWING				TITLE			
Charles Lee				FFC 0.5P			
APPROVED BY				PART NO			
Damon Miao				183005-15090			
DRAWN BY				DRAWN DATE			
2021/04/26				REV			
X1				SHEET			
2/2				SCALE			
1:1				PAGE			
-							