
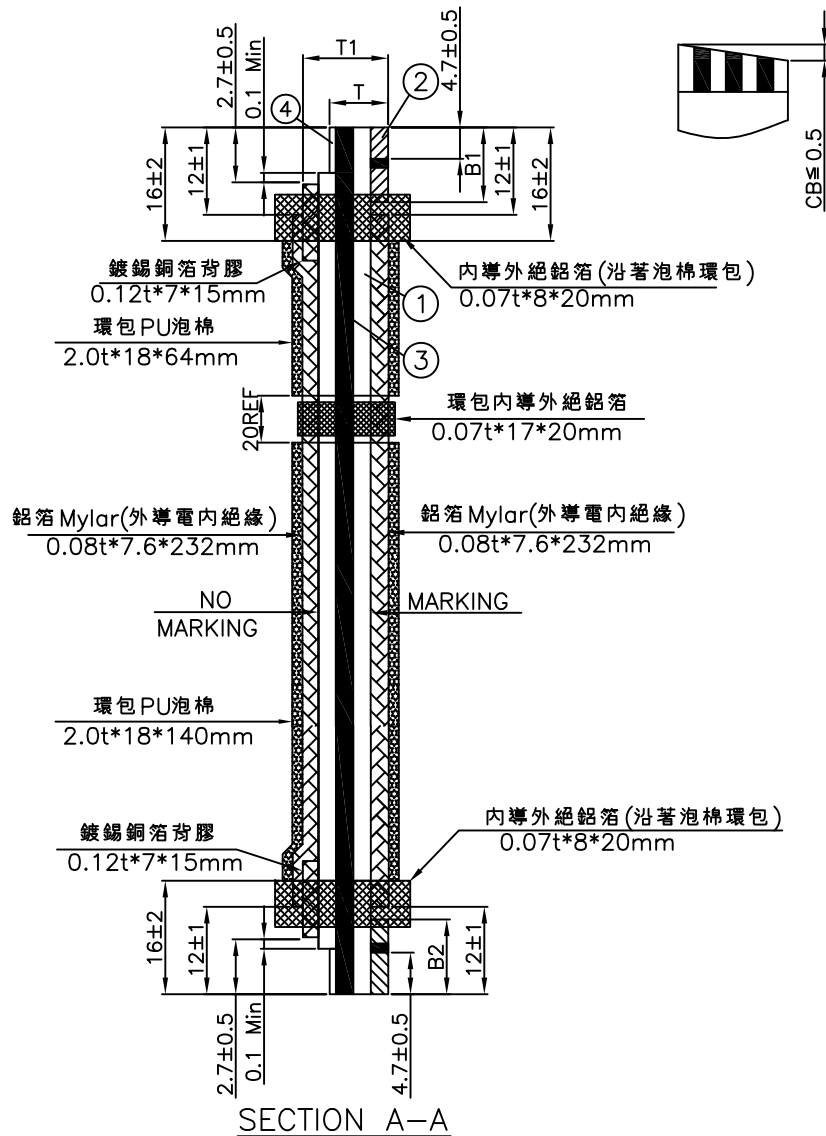


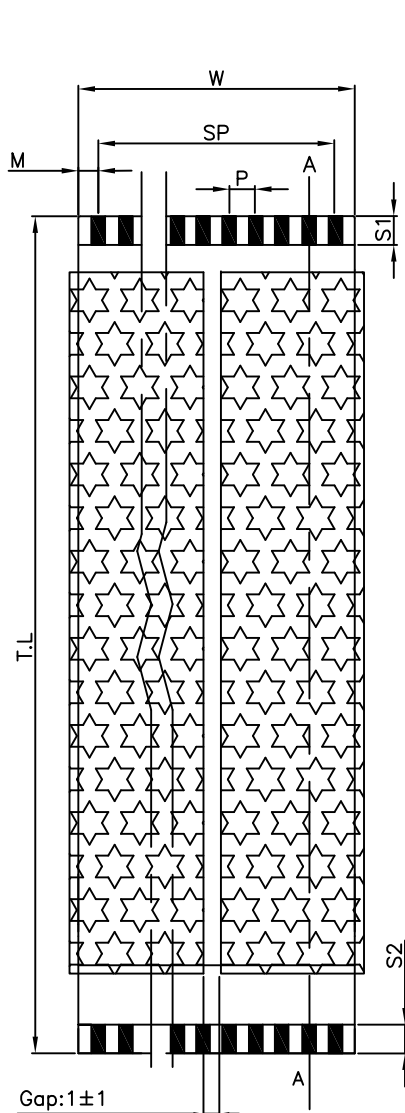

STRUCTURE			
NO	ITEM NAME	SPECIFICATION	REMARK
1	INSULATION	PET(UL20861)	105°C.60V
2	P/TAPE	PET	



3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		

DIMENSION			
PITCH	P	0.5	±0.05
SPAN	SP	7.0	±0.05
WIDTH	W	8.0	±0.1
MARGIN	☒ M	0.5	±0.1
INSERT THICKNESS	T	0.3	±0.05
	☒ T1	0.5	±0.05
PROTECTOR LENGTH	☒ B1	7.0	±1.0
	☒ B2	7.0	±1.0
STRIP LENGTH	☒ S1	2.2	±0.5
	☒ S2	2.2	±0.5
TOTAL LENGTH	T.L	256.0	±2.0
NO of PIN	15P		

NOTES:

- 成品補強板上畫白線(不含線寬),線寬LW=0.5mm,如圖示
- ☒為重點管控尺寸
- 成品S1&S2端鍍錫銅箔需導通

CUSTOMER DARWING				P-TWO INDUSTRIES INC.			
CUSTOMER DRAWING				APPROVED BY Charles Lee			
				CHECKED BY Samuel Hung			
				DRAWN BY Damon Miao			
				PART NO 183005-15091			
				TITLE FFC 0.5P			
				DRAWN DATE 2021/04/26			
				REV X1			
				SHEET 1/2			
				SCALE 1:1			
				PAGE -			

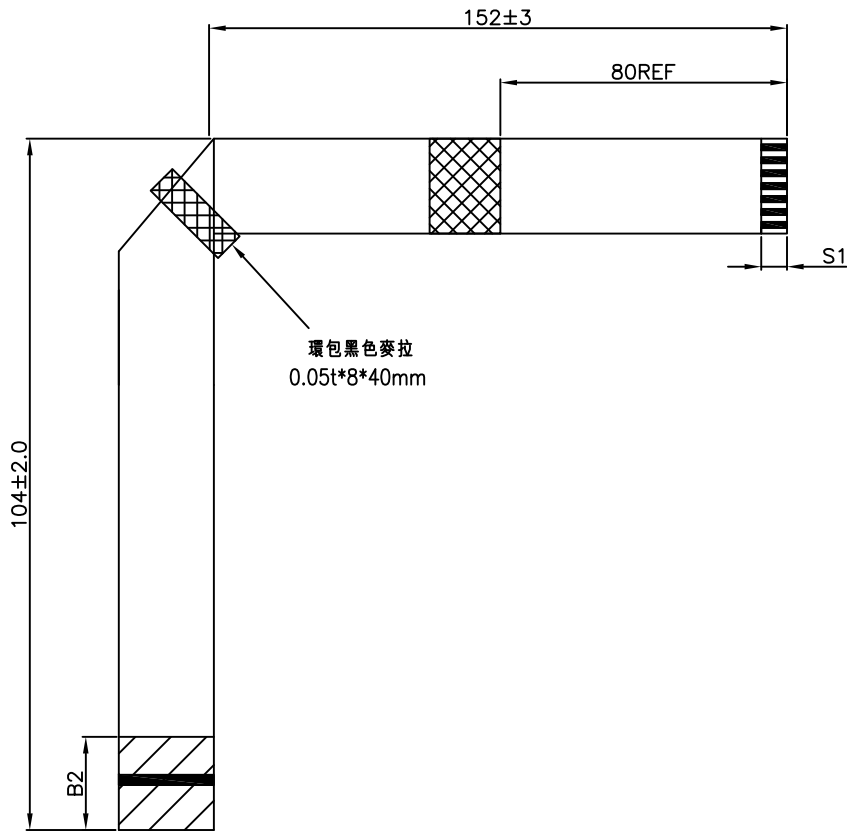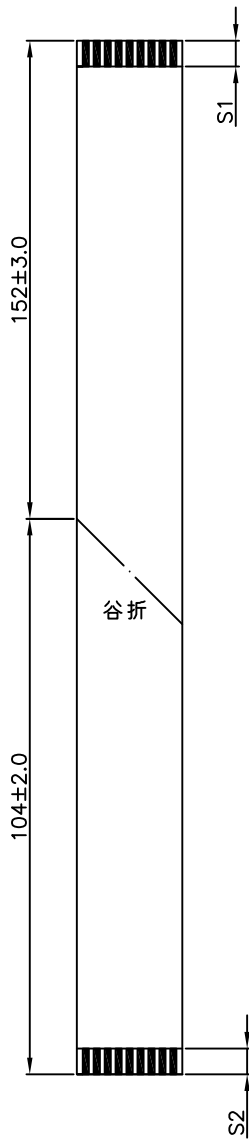

CUSTOMER DARWING						P-TWO INDUSTRIES INC.					
CUSTOMER DRAWING						APPROVED BY Charles Lee			TITLE FFC 0.5P		
						CHECKED BY Samuel Hung			PART NO 183005-15091		
						DRAWN BY Damon Miao					
						DRAWN DATE 2021/04/26			REV X1		
						SHEET 2/2			SCALE 1:1		
						PAGE -					