


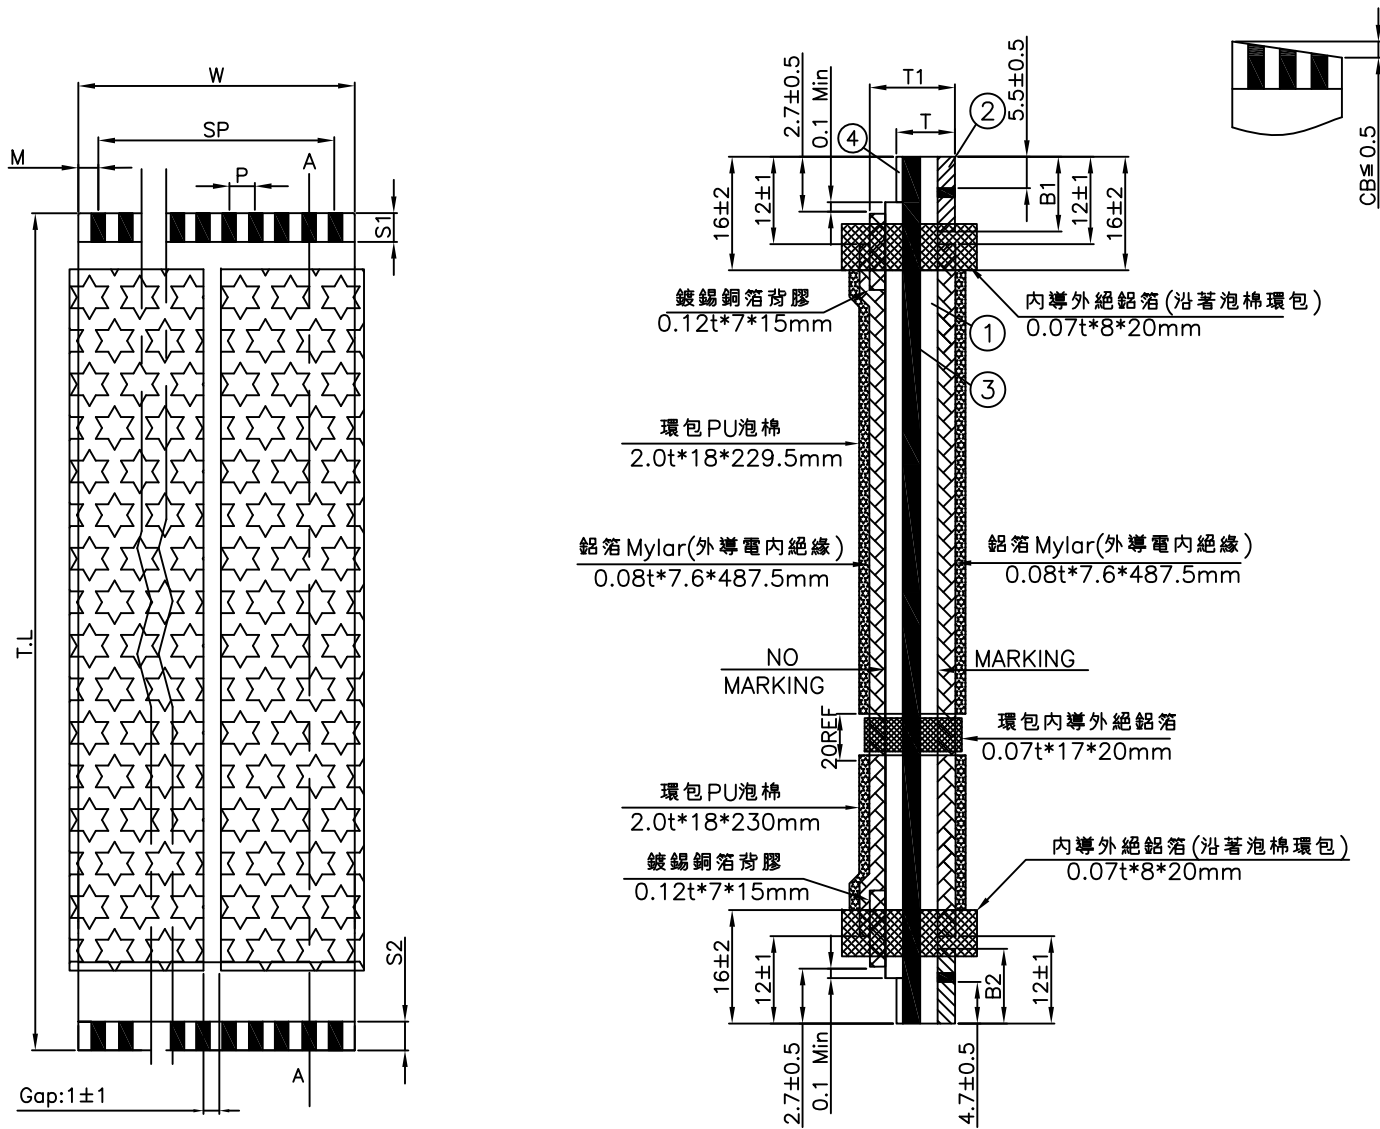

STRUCTURE			
NO	ITEM NAME	SPECIFICATION	REMARK
1	INSULATION	PET(UL20861)	105°C.60V
2	P/TAPE	PET	

3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		


DIMENSION			
PITCH	P	0.5	±0.05
SPAN	SP	7.0	±0.05
WIDTH	W	8.0	±0.1
MARGIN	☒ M	0.5	±0.1
INSERT THICKNESS	☒ T	0.3	±0.05
	☒ T1	0.5	±0.05
PROTECTOR LENGTH	☒ B1	7.0	±1.0
	☒ B2	7.0	±1.0
STRIP LENGTH	☒ S1	2.2	±0.5
	☒ S2	2.2	±0.5
TOTAL LENGTH	T.L	511.5	±2.0
NO of PIN	15P		

NOTES:

- 成品補強板上畫白線(不含線寬),線寬LW=0.5mm,如圖示
- ☒為重點管控尺寸
- 成品S1&S2端鍍錫銅箔需導通

SECTION A-A

CUSTOMER DARWING				P-TWO INDUSTRIES INC.			
CUSTOMER DRAWING				FFC 0.5P			
Charles Lee		APPROVED BY		DRAWN BY		PART NO	
Damon Miao		DRAWN BY		2021/04/26		183005-15094	
SER	DESCRIPTION	UNIT	SIZE	REVISION	SHEET	SCALE	PAGE
6		mm	A4	X1	1/2	1:1	-

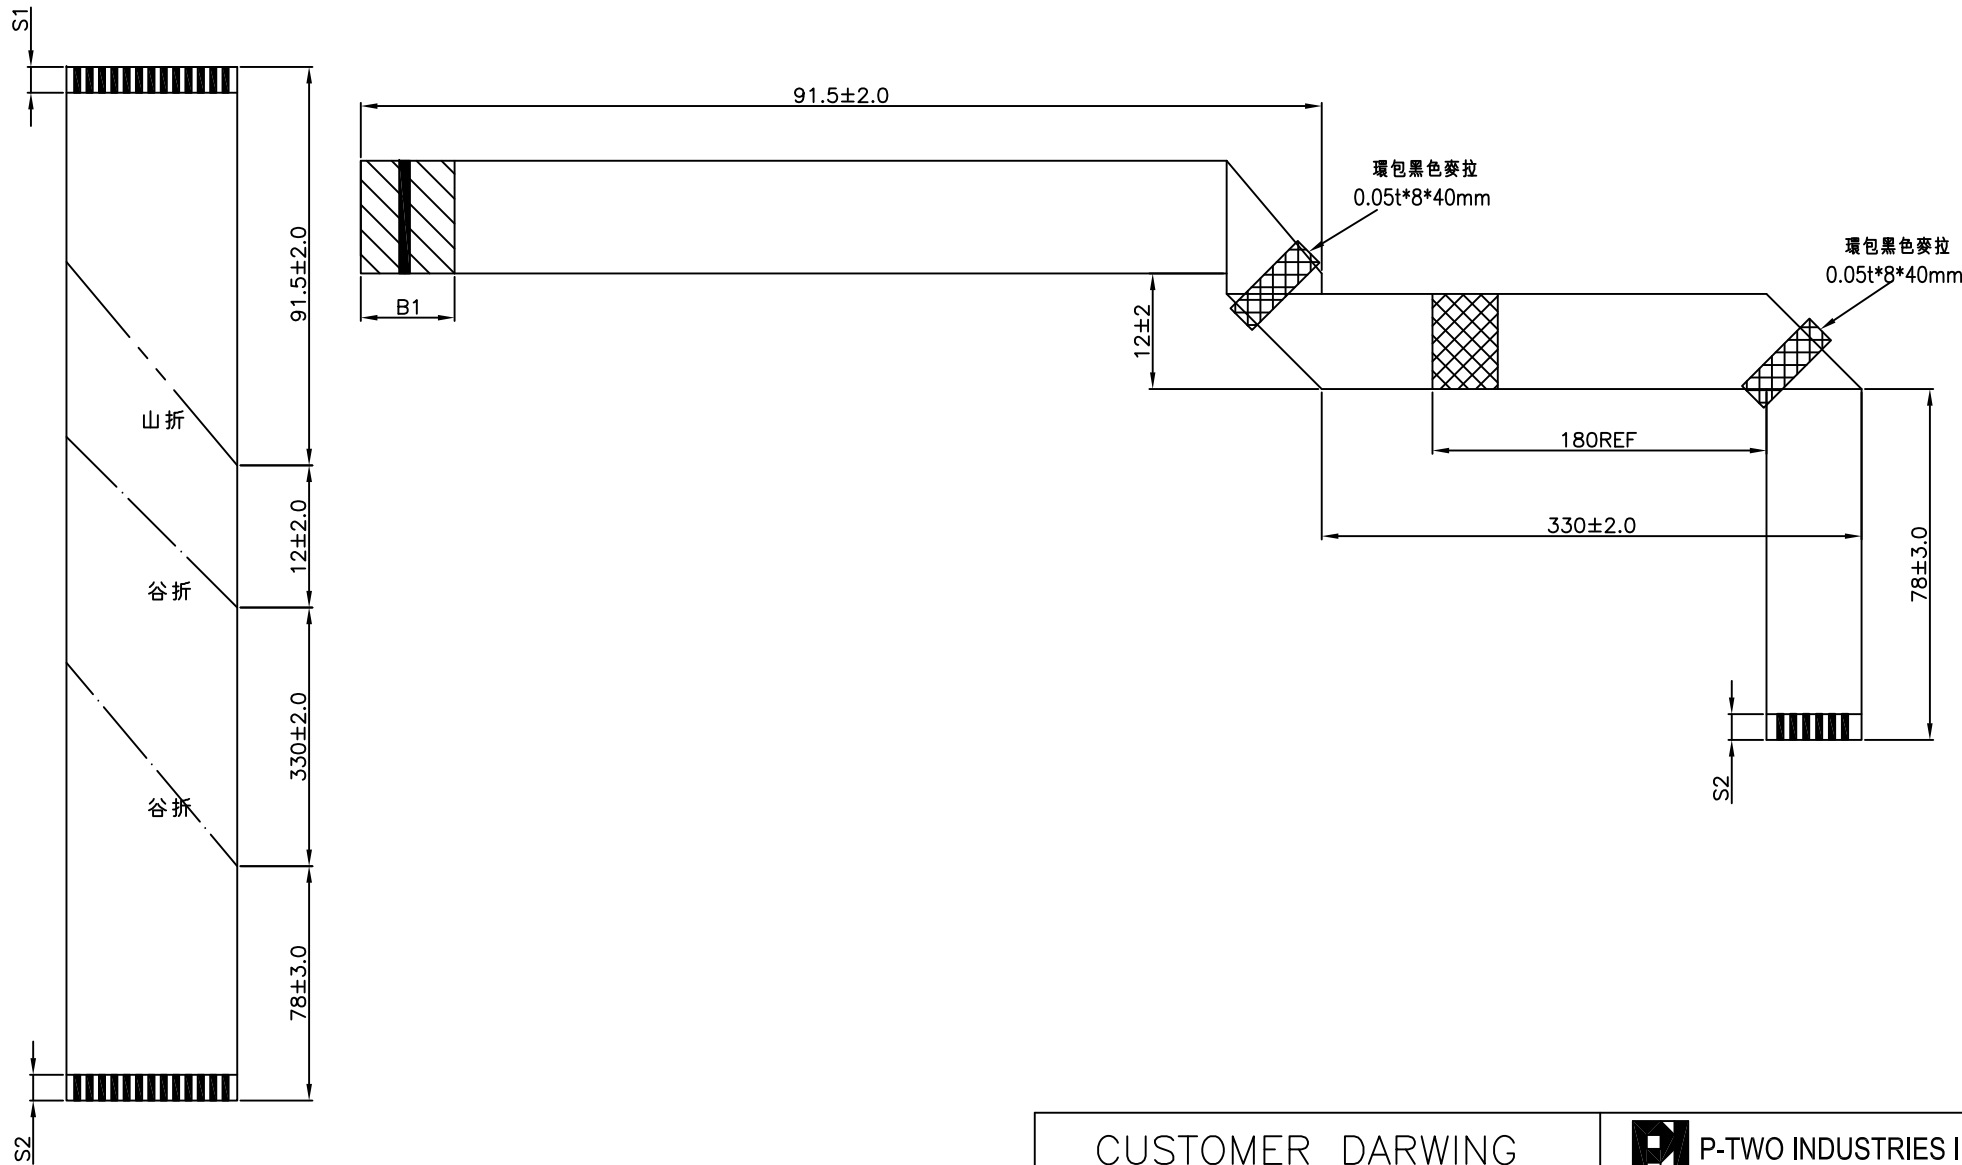

CUSTOMER DARWING						P-TWO INDUSTRIES INC.					
CUSTOMER DRAWING						TITLE					
Charles Lee						FFC 0.5P					
APPROVED BY						PART NO					
Damon Miao						183005-15094					
DRAWN BY						DRAWN DATE					
2021/04/26						REV					
X1						SHEET					
2/2						SCALE					
1:1						PAGE					
-											