

SPECIFICATIONS

* Model Identifications

Model Code	Customer P/ N
4AI20-CMXX02	352.00191.005LT

Signed for/on behalf of us. By: R&D manager Mr. ----- Date: . .	Signed for/on behalf of you. By: ----- Date : . .
--	--

This Specifications will be valid after the date of acceptance by both 'Dreamus' and the customer. Without formal request for updating by one of the involved parties, this Specifications will be valid until the end of usage of the relevant products by the customer.



1. REVISION RECORD

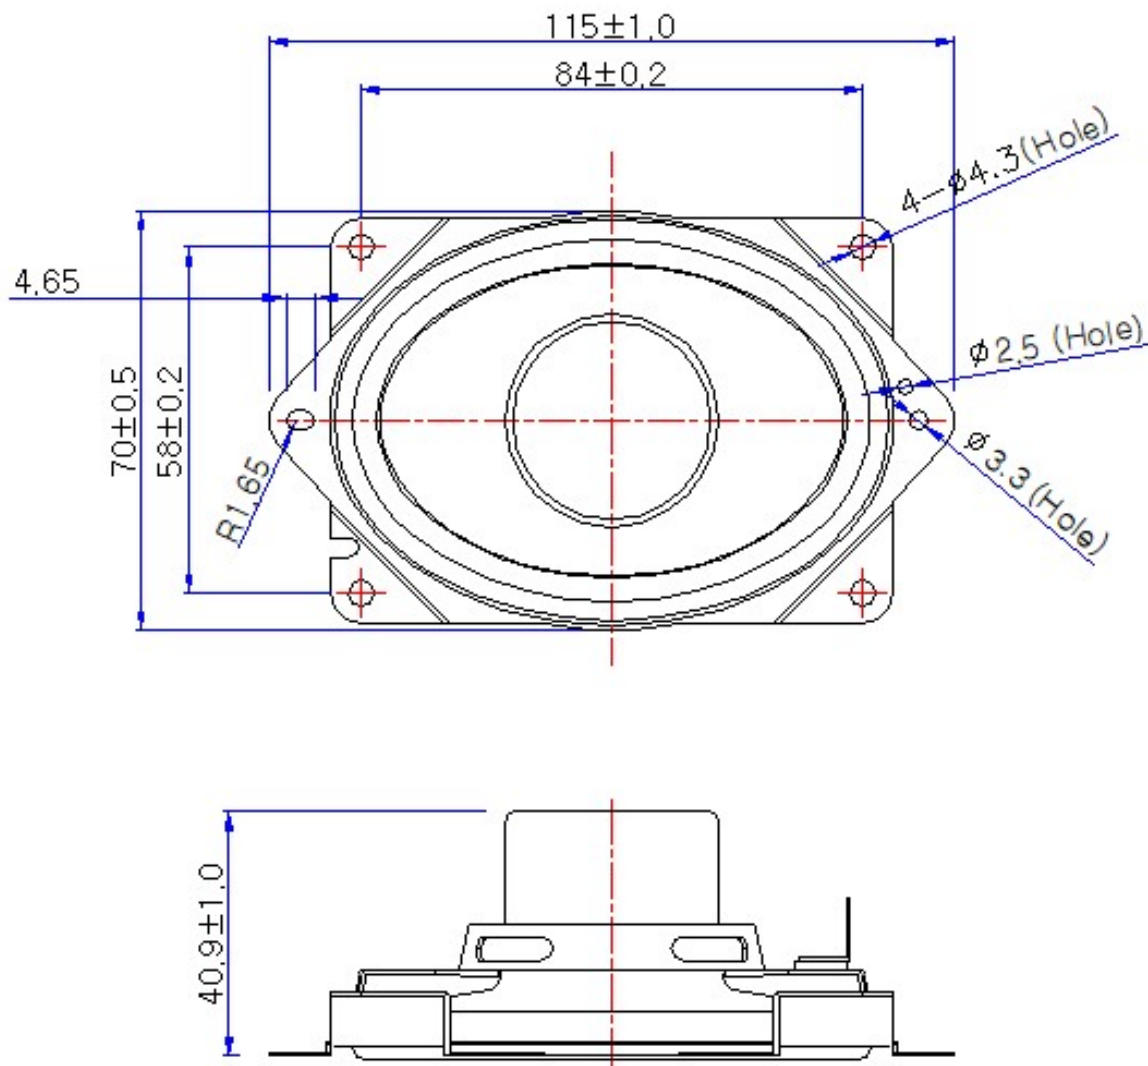
Rev. No	DATE	DESCRIPTION	By	Chk.	App.
0	13. APR. 2021	R&D and ECO Release	3h xlm		
1	28. APR. 2021	Change of Impedance	3h xlm		
2	6. SEP. 2021	Change of Frequency Range	3h xlm		
3					
4					
5					
6					
7					
8					

2. RoHS ENVIRONMENTAL STANDARDS

CLASSIFICATIONS	SUBSTANCES	COMPLIANCE	
		YES	NO
RoHS	Lead and its Compounds	☒	☐
	Cadmium and its Compounds	☒	☐
	Mercury and its Compounds	☒	☐
	Hexavalent Chromium and its Compounds	☒	☐
	Polybrominated Biphenyls	☒	☐
	Polybrominated Diphenylethers	☒	☐

DESIGNED		CHECKED		APPROVED	
6. SEP. 2021	3h xlm	6. SEP. 2021		6. SEP. 2021	


3. MECHANICAL CHARACTERISTICS




UNIT : mm
TOLERANCE : ± 1.0

DESIGNED

6. SEP. 2021


CHECKED

6. SEP. 2021


APPROVED

6. SEP. 2021



4. ELECTRICAL CHARACTERISTICS

PARAMETER	SPECIFICATION	UNIT
Impedance AT 500Hz / 1.0Vrms	3 ± 0.6	Ω
Power Rating (Nor / Max)	30 / 40	Watt
Polarity	When a positive DC current is applied to the marked (+), diaphragm shall move forward.	

5. ACOUSTIC CHARACTERISTICS


PARAMETER	SPECIFICATION	UNIT
Sound Pressure Level At 1.0W Input & 1.0m distance ※ R&D Measurement Conditions (Clio. 12)	80 ± 3 Avg (0.1, 0.3, 0.6, 1.0) kHz	dB
Sound Pressure Level At 1.0W Input & 1.5cm distance ※ Production Line Measurement Conditions (Bako 2120A)	137 ± 3 Avg (0.1, 0.3, 0.6, 1.0) kHz	dB
Total Harmonic Distortion	Less than 5% at 1KHz, 1W	%
Resonance Frequency (Fo) At 1.0 Vrms	95 ± 20	Hz
Frequency Range	Fo ~ 2	KHz
Buzz and Rattle etc.	Should not be audible at 10W (RMS. 5.47V) sine wave from Fo to 2 KHz.	

6. ENVIRONMENTAL CHARACTERISTICS

PARAMETER	SPECIFICATION	UNIT
Operating Temperature Range	-20 ~ 65	°C
Storage Temperature Range	-25 ~ 70	°C

DESIGNED
CHECKED
APPROVED

6. SEP. 2021



6. SEP. 2021

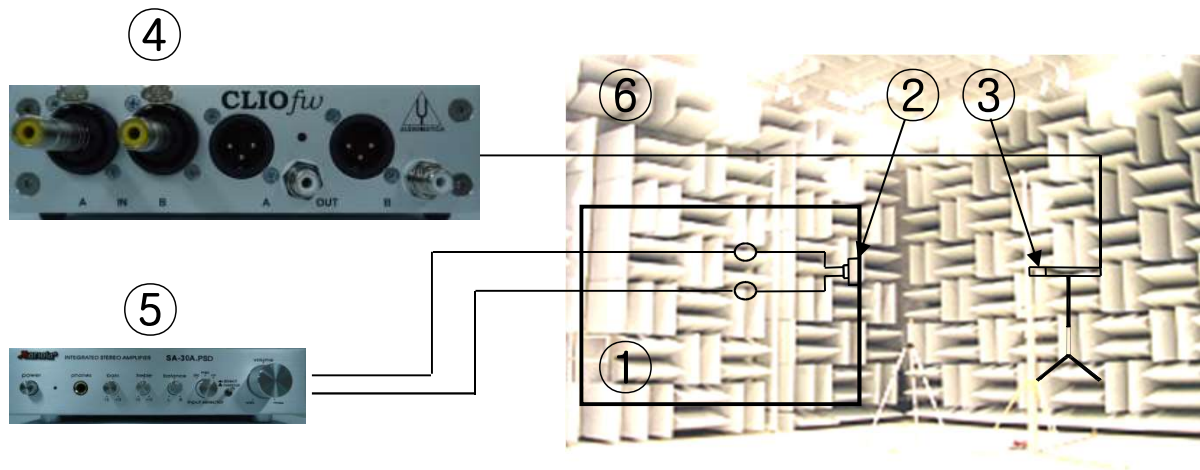


6. SEP. 2021





7. MEASUREMENT STANDARD

7-1 Measurement Environment



7-2 Measurement Environment

①	Baffle Box	JIS C 5532
②	Speaker Unit	4AI20-CMXX02
③	Microphone	CLIO MIC-02
④	Analyzer	CLIO FW V.12
⑤	Amplifier	MARLOSA SA-30.PSD
⑥	Anechoic room	2.5×2.5×3 (m)
⑦	Input Power	1.0 (W)
⑧	Testing Distance	1.0 (m)

DESIGNED		CHECKED		APPROVED	
6. SEP. 2021		6. SEP. 2021		6. SEP. 2021	

8. TYPICAL FREQUENCY RESPONSE CURVE




NOTE:

- The frequency response curve is drawn with the "1/3OCT" smoothing Function of CLIO 12.

DESIGNED

6. SEP. 2021


CHECKED

6. SEP. 2021


APPROVED

6. SEP. 2021



9. RELIABLE TEST STANDARDS

No	Test Item	Conditions
9-1	After Test	Sensitivity difference shall be within $\pm 3\text{dB}$ after test.
9-2	High Temperature Test	High temperature.....+ 70°C Duration.....96 hours
9-3	Low Temperature Test	Low temperature..... - 25°C Duration.....96 hours
9-4	Thermal Shock Test	Temperature- 25°C ↔ + 70°C Duration.....2hours Cycle.....15 cycles
9-5	Humidity Test	Temperature.....+ 40°C Relative humidity.....90% Duration.....96 hours
9-6	Vibration Test	Vibration.....10 - 55Hz / min Amplitude.....1.5mm Duration..... 2 hour in each of 3axes
9-7	Drop Test	Height.....0.7m / 70° Cycle.....1 cycle
9-8	Load Test	Subject samples to White Noise for 96 hours at 30W input power
		Subject samples to White Noise for 10 hours at 40W input power → There will be no broken after the test

DESIGNED

6. SEP. 2021


CHECKED

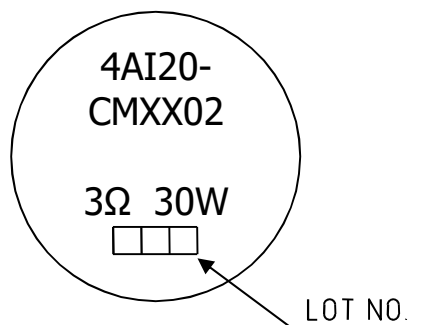
6. SEP. 2021


APPROVED

6. SEP. 2021



10. TRACEABILITY STANDARDS



LOT NO.

YEAR		MONTH		SECTION	
0	2020	1	1	1	1 WEEK
1	2021	2	2	2	2 WEEK
2	2022	3	3	3	3 WEEK
3	2023	4	4	4	4 WEEK
4	2024	5	5	5	5 WEEK
5	2025	6	6		
6	2026	7	7		
7	2027	8	8		
8	2028	9	9		
9	2029	X	10		
		Y	11		
		Z	12		

EX) 143

1 → 2021 (YEAR)

4 → APRIL (MONTH)

3 → 3WEEK

11. PACKING LABEL

FXN PN	Description
352.00191.005LT	SPEAKER 3+-0.6ohm 80+-3dB 30~40W GP 4AI20-CMXX02

DESIGNED

6. SEP. 2021

[Signature]

CHECKED

6. SEP. 2021

[Signature]

APPROVED

6. SEP. 2021

[Signature]