

Hardware Unit Test Report

DC (5V) plug in test

Hardware version	FW version	Sample No.	eMMC Flash P/N
V015	4.9.113 #3 Tue Apr 23 14:54:40 CST 2019 Build BFX_AT100-eng 9 PI 20190423 release-keys	S/N: 2154001662-01S1	KLM8G1GETF-B041

1. Test Setup

Equipment:


1. Eagle DVT board V015.
2. AC POWER: 110V input/ 220V input
3. Adapter model: Editech TYPE2541 5V/2A



Test Environment:

1. Test place: FXN CNSBG Building 1F office
2. Test DUT name: Eagle DVT V015 board
3. Test environment condition: temperature: 25 deg-C, humidity: 65
4. Test date: 2019/8/26
5. Test result: See section 3 for test results.
6. Test setup picture (block diagram)

Block Diagram:

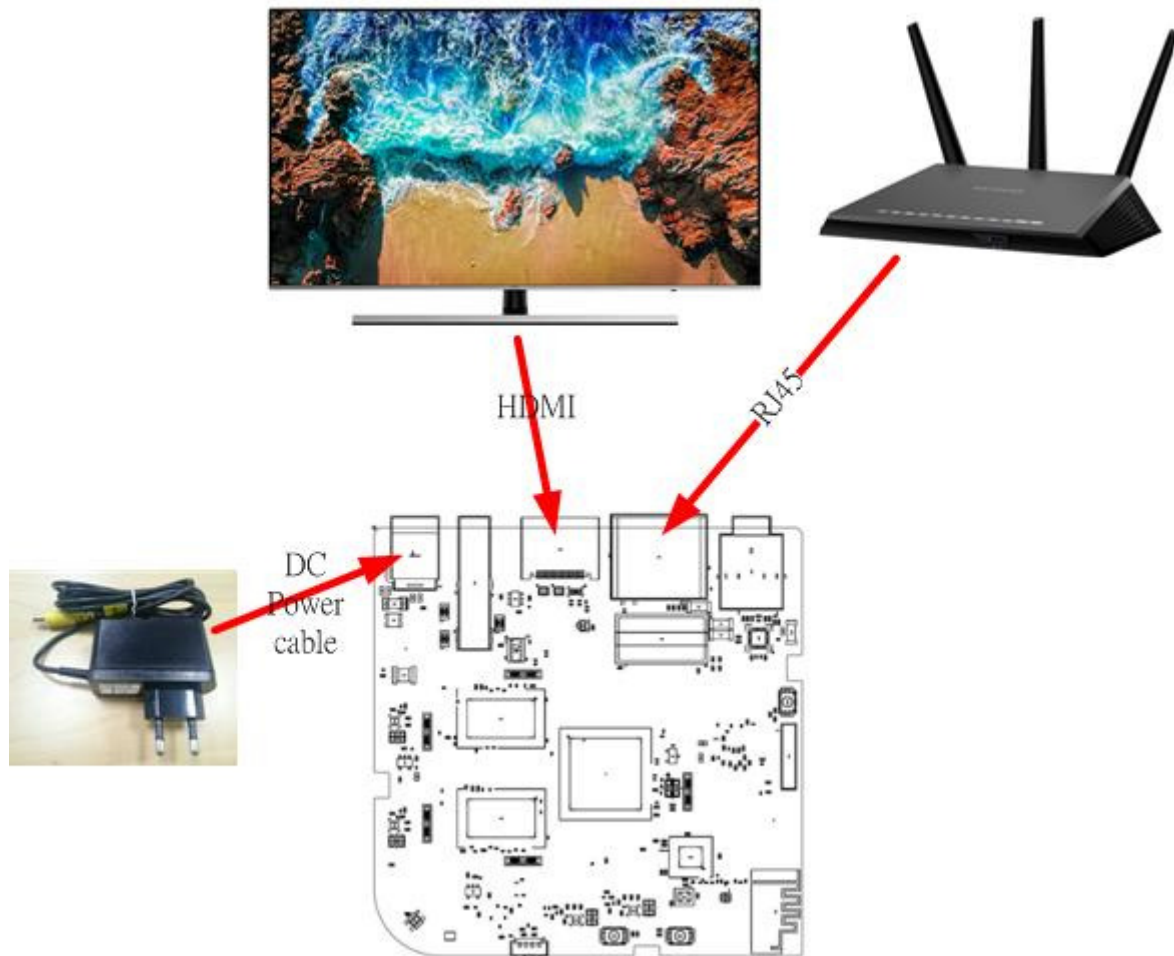

2. Test Items and Condition

1. Connect Ethernet cable
2. DC 5V plug in
3. Waiting for the monitor display home menu
4. Stop the measurement of oscilloscope

3. Test Result

3.1. AC: 110V

Fig.1 shows 5V current from DC plug in to HDMI output using SK broadband adapter and 110V AC input.

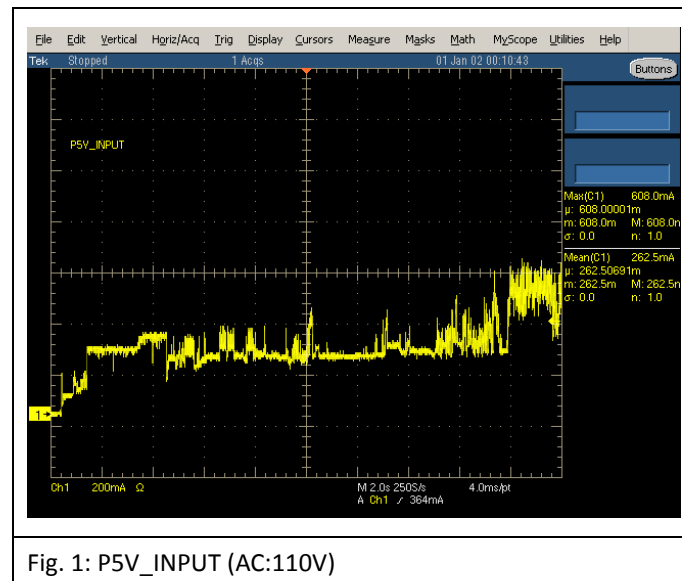


Fig. 1: P5V_INPUT (AC:110V)

Fig.2 shows inrush current when DC plug in. The Maximum current is 432.0mA.

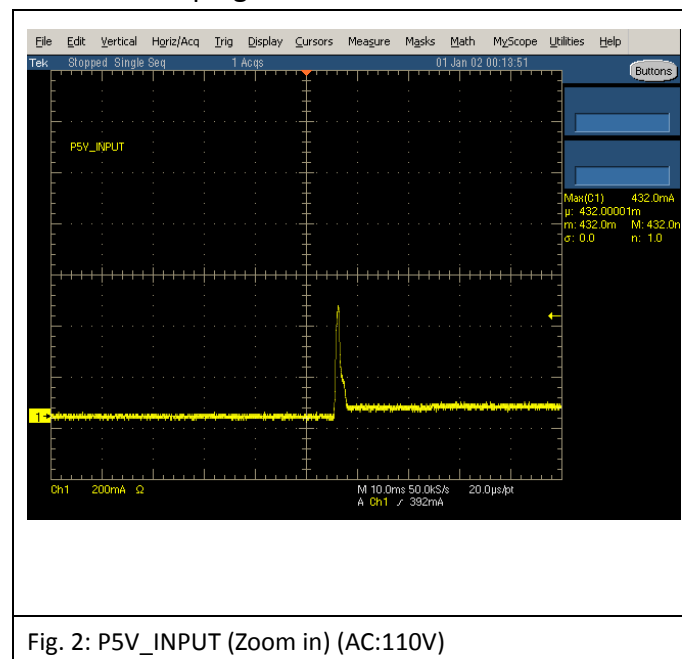


Fig. 2: P5V_INPUT (Zoom in) (AC:110V)

3.2. AC: 220V

Fig.3 shows 5V current from DC plug in to HDMI output using SK broadband adapter and 220V AC input.



Fig. 3: P5V_INPUT (AC:220V)

Fig.4 shows inrush current when DC plug in. The Maximum current is 392.0mA.

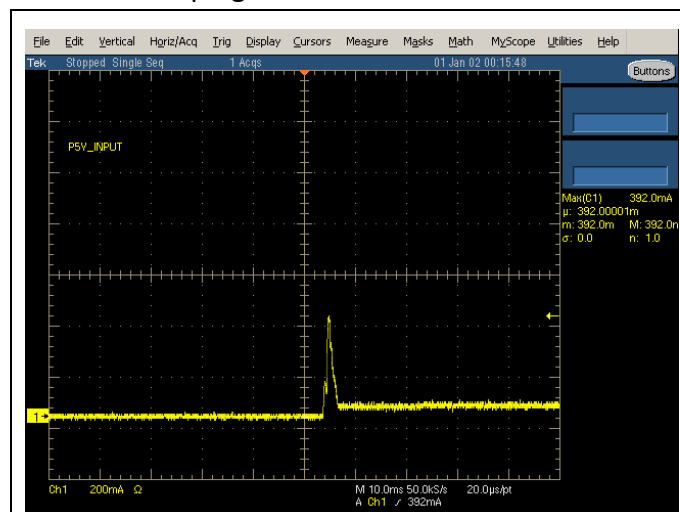


Fig. 4: P5V_INPUT (Zoom in) (AC:220V)