




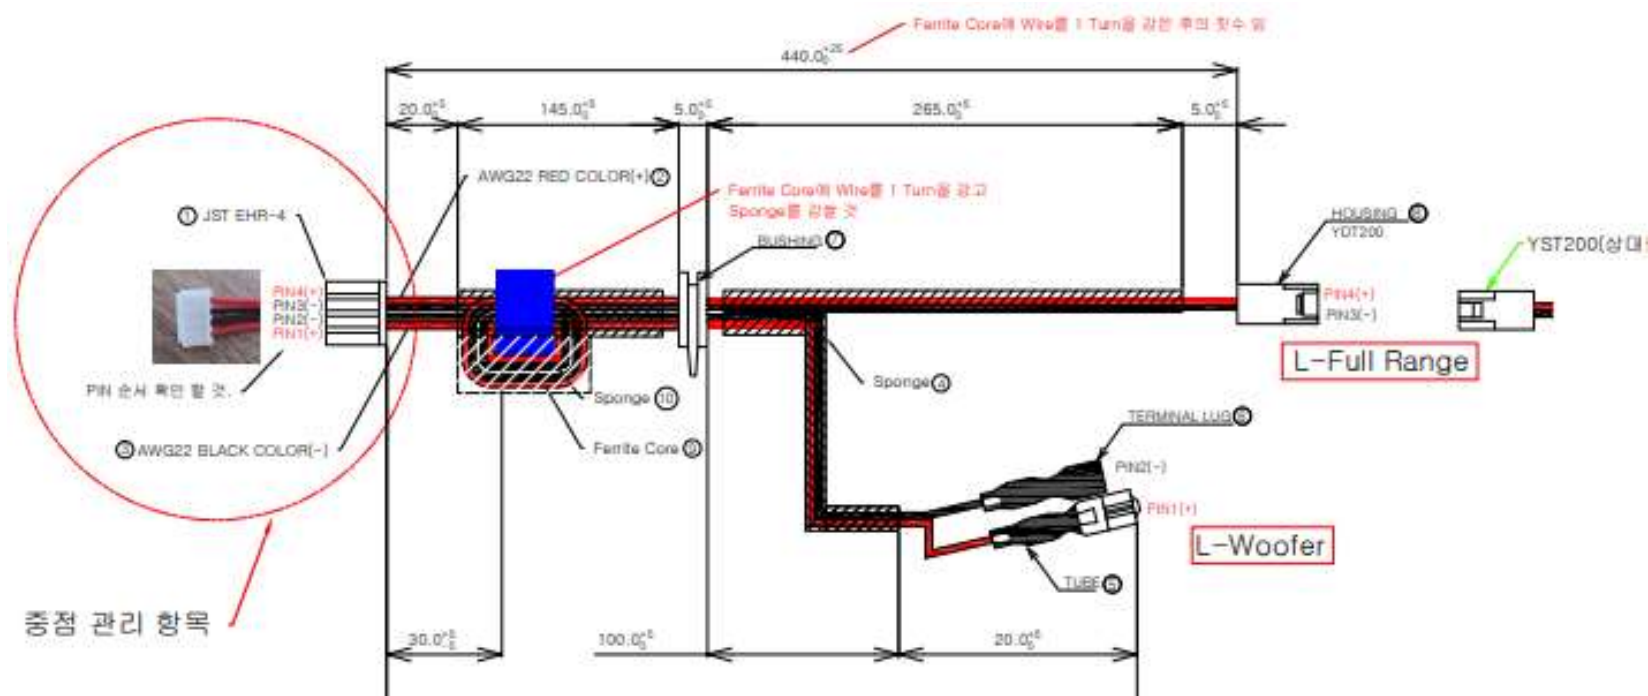

SPEC_4AI20-CMXX06 cable

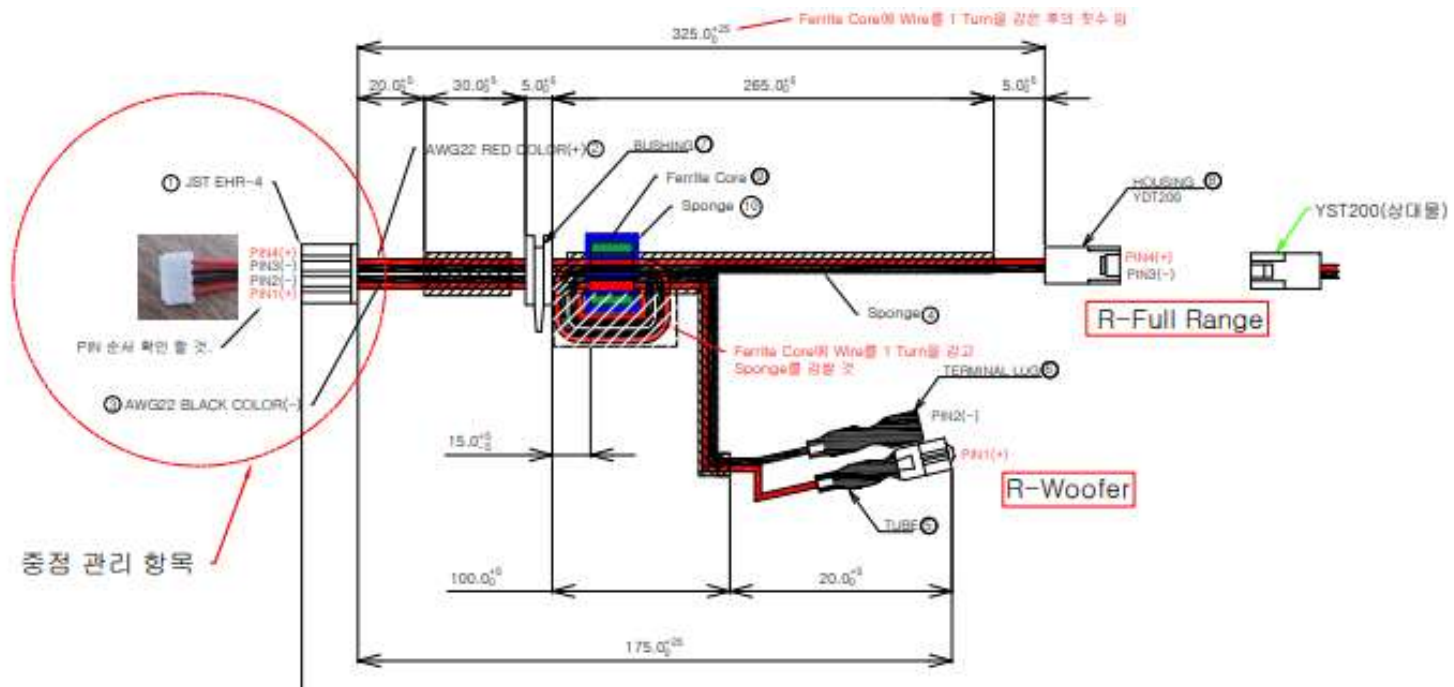

New Speaker cable EMI test result

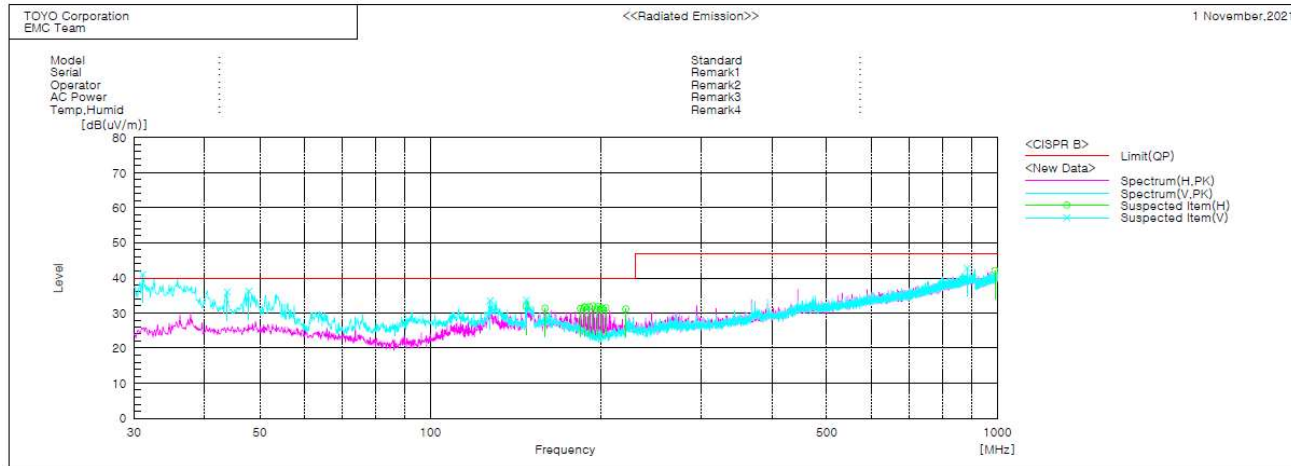

Spectrum Selection

No.	Frequency [MHz]	(P)	Reading [dB(uV)]	c.f [dB(1/m)]	Result PK [dB(uV/m)]	Limit QP [dB(uV/m)]	Margin QP [dB]	Height [cm]	Angle [deg]	Remark
1	31.091	V	28.6	12.4	41.0	40.0	-1.0	100.0	101.9	
2	43.823	V	21.9	14.1	36.0	40.0	4.0	100.0	65.4	
3	47.824	V	21.9	14.3	36.2	40.0	3.8	100.0	276.1	
4	127.485	V	20.7	12.8	33.5	40.0	6.5	100.0	13.0	
5	147.491	V	19.0	14.7	33.7	40.0	6.3	100.0	176.6	
6	147.491	H	17.3	14.7	32.0	40.0	8.0	100.0	262.3	
7	159.374	H	16.5	14.9	31.4	40.0	8.6	100.0	169.9	
8	183.988	H	18.6	12.7	31.3	40.0	8.7	100.0	212.4	
9	187.019	H	19.1	12.3	31.4	40.0	8.6	100.0	202.9	
10	187.383	H	19.6	12.2	31.8	40.0	8.2	100.0	217.3	
11	190.535	H	19.8	11.9	31.7	40.0	8.3	100.0	207.6	
12	193.566	H	20.4	11.6	32.0	40.0	8.0	100.0	217.3	
13	197.083	H	19.7	11.4	31.1	40.0	8.9	100.0	202.9	
14	197.446	H	20.4	11.4	31.8	40.0	8.2	100.0	233.4	
15	200.478	H	19.8	11.3	31.1	40.0	8.9	100.0	217.3	
16	200.841	H	20.1	11.3	31.4	40.0	8.6	100.0	212.4	
17	203.994	H	20.1	11.4	31.5	40.0	8.5	100.0	223.2	
18	221.211	H	19.1	12.0	31.1	40.0	8.9	100.0	223.2	
19	884.691	V	15.4	27.4	42.8	47.0	4.2	100.0	176.6	
20	990.542	H	13.3	28.8	42.1	47.0	4.9	100.0	50.5	