

General Description

SY8824C is a high efficiency 1.8MHz synchronous step down DC-DC regulator IC capable of delivering up to 4A output current. It can operate over a wide input voltage range from 2.6V to 5.5V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss. The output voltage can be programmed from 0.7625V to 1.55V through I²C interface.

SY8824C is available in TSOT23-8 package.

Ordering Information

SY8824 □ (□ □) □
 □ Temperature Code
 □ Package Code
 □ Optional Spec Code

Ordering Number	Package Type	Note
SY8824CAIC	TSOT23-8	--

Features

- 2.6V to 5.5V Input Voltage Range
- Fixed Frequency Operation: 1.8MHz
- Low $R_{DS(ON)}$ for Internal Switches (Top/Bottom): 70mΩ/40mΩ
- Programmable Output Voltage: 0.7625V to 1.55V in 12.5mV Steps
- Default 1.05V Output Voltage
- 4A Output Current Capability
- Capable for 0.33μH Inductor and 22μF Ceramic Capacitor
- PFM/PWM Operation for Optimum Increased Efficiency
- OVP/OCP/UVLO/OTP Protections
- RoHS Compliant and Halogen Free
- Compact Package: TSOT23-8

Applications

- Smart Phone
- MID

Typical Applications

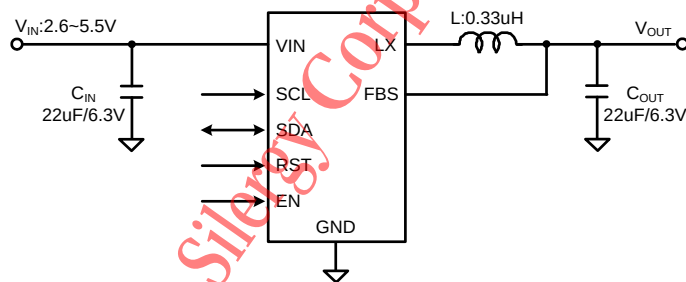


Figure 1. Schematic Diagram


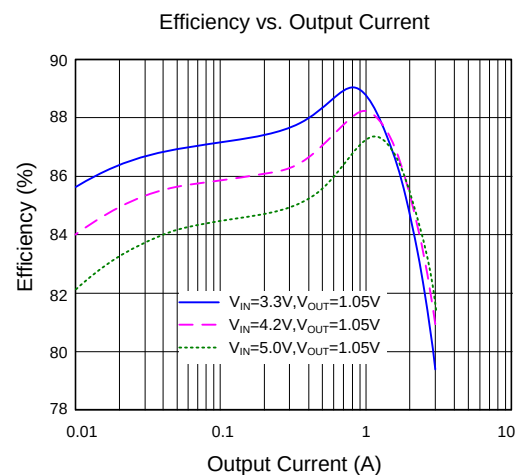


Figure 2. Efficiency vs. Output Current

Pinout (top view)

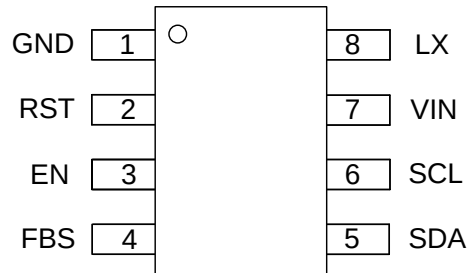

(TSOT23-8)

Top Mark: Urxyz, (Device code: Ur, x=year code, y=week code, z= lot number code)

Pin Number	Pin Name	Pin Description
1	GND	Ground pin.
2	RST	Pulling this pin high will reset the register to default value. Do not leave it floating.
3	EN	Enable control pin. Active high. Do not leave it floating. If EN pin is low, the DC-DC converter will be turned off, and all I ² C registers will be reset to default values.
4	FBS	Feedback pin. Must be connected to the output capacitor positive terminal with a separated trace to avoid noise.
5	SDA	Data line for the I ² C interface. Open-drain output.
6	SCL	Clock input for the I ² C interface. Open-drain input.
7	VIN	Power input pin. This pin must be decoupled to ground by a 22μF ceramic capacitor. It should be placed as close as possible between IN and GND pins.
8	LX	Switching node pin. Connect this pin to the switching of inductor.

Absolute Maximum Ratings (Note 1)

VIN	6.0V
All Other Pins	-0.3V~VIN + 0.6V
Power Dissipation, PD @ TA = 25℃ TSOT23-8	1.7W
Package Thermal Resistance (Note 2)	
θJA	58℃ /W
θJC	5.5℃ /W
Junction Temperature Range	150℃
Lead Temperature (Soldering, 10 sec.)	260℃
Storage Temperature Range	-65℃ to 150℃

Recommended Operating Conditions (Note 3)

Supply Input Voltage	2.6V to 5.5V
Junction Temperature Range	-40℃ to 125℃
Ambient Temperature Range	-40℃ to 85℃



Electrical Characteristics

(V_{IN} = 5V, V_{OUT} = 1.05V, L = 0.33μH, C_{OUT} = 22μF, T_A = 25 °C, unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Range	V _{IN}		2.6		5.5	V
V _{IN} UVLO	V _{UVLO}	V _{IN} rising		2.4	2.55	V
V _{IN} UVLO Hysteresis	V _{UVHYST}			120		mV
Quiescent Current	I _Q	I _{OUT} =0, EN=1, FB=105%×V _{REF}		80		μA
Shut-down Current	I _{SHDN_H/W}	EN=0		0.1	1	μA
	I _{SHDN_S/W}	EN=V _{IN} , Buck_EN=0		30		
EN, RST						
Rising Threshold	V _{IH}		1.1			V
Falling Threshold	V _{IL}				0.4	V
SDA, SCL						
Rising Threshold	V _{IH}		1.5			V
Falling Threshold	V _{IL}				0.4	V
Other Parameters						
V _{OUT} Accuracy	V _{REG}	Forced PWM, default value	-1		+1	%
NFET R _{DS(ON)}	R _{DS(ON)N}			40		mΩ
PFET R _{DS(ON)}	R _{DS(ON)P}			70		mΩ
PMOS Peak Current Limit	I _{LIM_PEAK}		5.5			A
NMOS Valley Current Limit	I _{LIM_VALLEY}		4			A
Internal Soft-start Time	t _{SS}			300		μs
Min On Time	t _{ON}			40		ns
Oscillator Frequency	F _{OSC}			1.8		MHz
Thermal Shut-down Temperature	T _{SD}			150		℃
Thermal Shut-down Hysteresis	T _{HYS}			15		℃
FBS Node Discharge Resistor	R _{DSH}			10		Ω
Input OVP Shut-down	V _{OVP}	Rising threshold		6.15		V
		Falling threshold	5.5	5.85		V
Over Voltage Protection Blanking Time	t _{BLANKING}			20		μs
SDA Pull Down Resistor	R _{SDA}			25		Ω
Dynamic Voltage Scaling Slew Rate	dv/dt			100		mV/μs


Note 1: Stresses beyond the “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Note2: θ_{JA} of SY8824CAIC is measured in the natural convection at T_A = 25 °C on 20Z four-layer Silergy evaluation board of JEDEC 51-3 thermal measurement standard. Paddle of TSOT23-8 package is the case position for SY8824CAIC.


Note 3: The device is not guaranteed to function outside its operating conditions.

Typical Performance Characteristics


Efficiency vs. Output Current

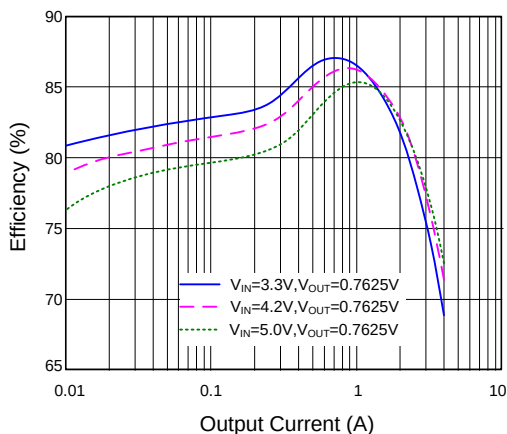




Efficiency vs. Output Current

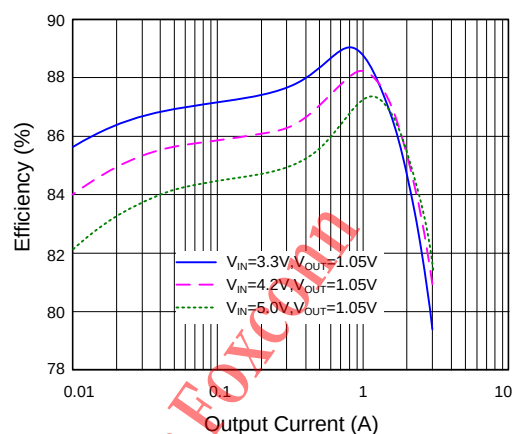


Efficiency vs. Output Current

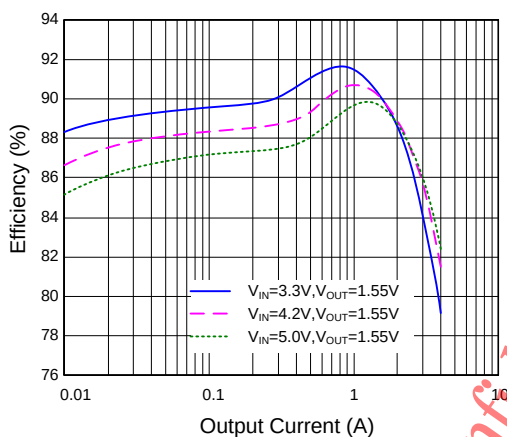

Output Ripple

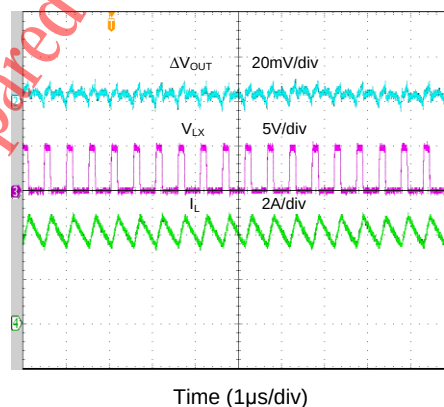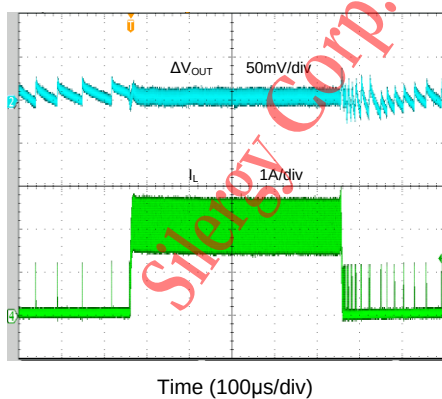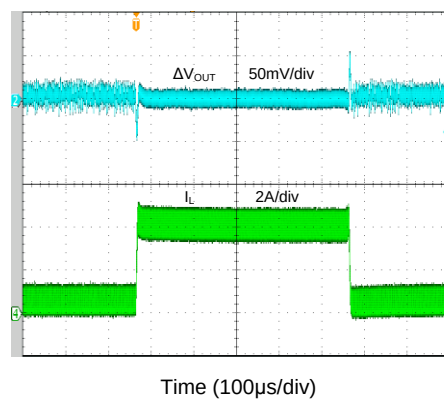
 ($V_{IN}=5.0V, V_{OUT}=1.05V, I_O=4.0A$)

 Load Transient
 ($V_{IN}=5.0V, V_{OUT}=1.05V, I_O=0 \sim 2.0A$)

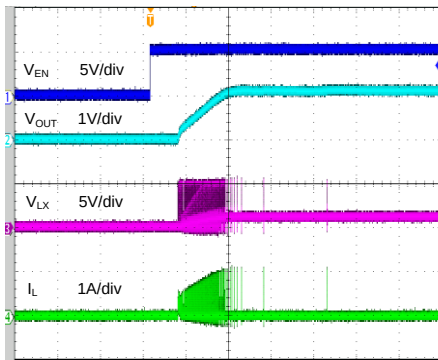 Load Transient
 ($V_{IN}=5.0V, V_{OUT}=1.05V, I_O=0.4 \sim 4.0A$)


Start up from EN
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=0A$)

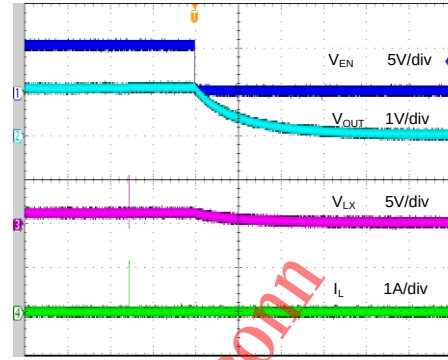


Time (200 μ s/div)

Shutdown from EN
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=0A$)




Time (200 μ s/div)

Start up from EN
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=4A$)

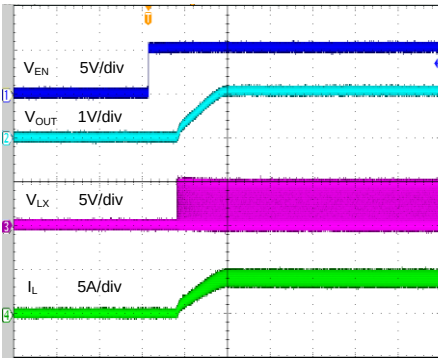


Time (200 μ s/div)

Shutdown from EN
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=4A$)

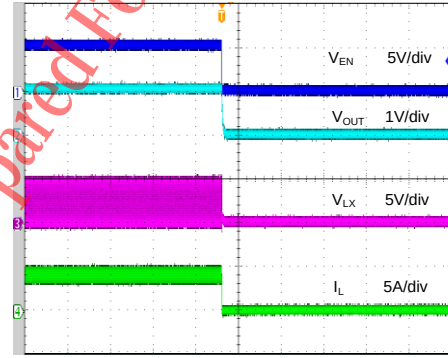


Time (200 μ s/div)

Short Circuit Protection
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=0A \sim$ short)




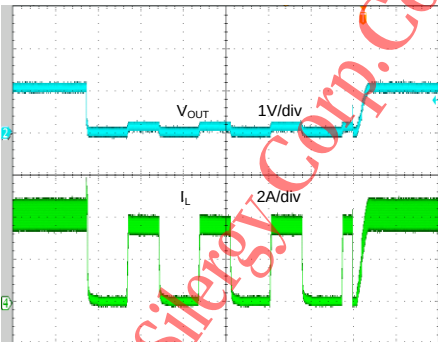


Time (800 μ s/div)

Short Circuit Protection
($V_{IN}=5.0V$, $V_{OUT}=1.05V$, $I_O=4A \sim$ short)

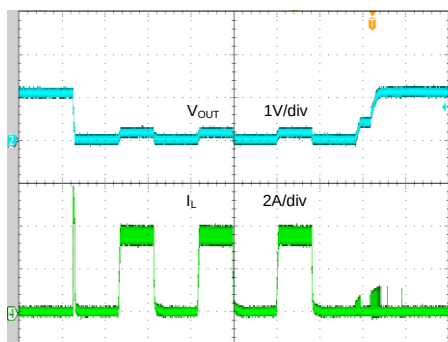

Time (800 μ s/div)

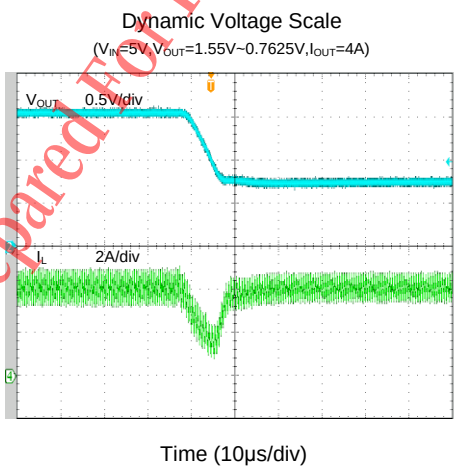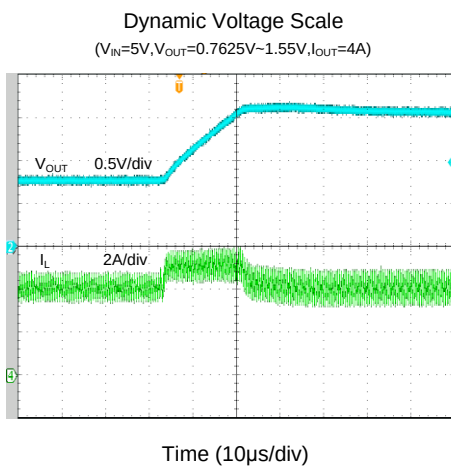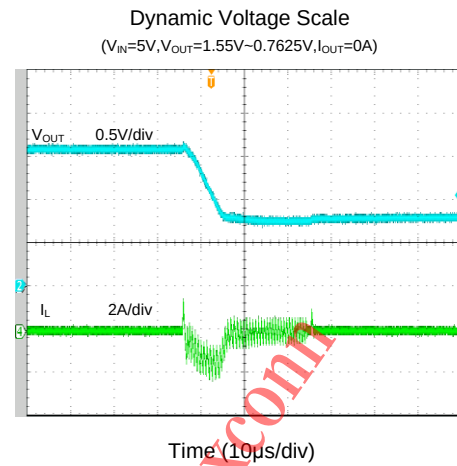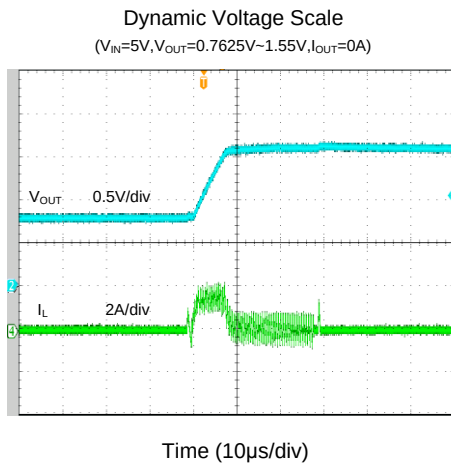



I²C Interface

I²C address of the SY8824C is set to 0xCCh at the factory.

SY8824C features an I²C interface that allows the HOST processor to control the output voltage achieve the DVS function. The I²C interface supports clock in speeding up to 3.4MHz and uses standard I²C commands. SY8824C always operates as a slave device, and is addressed using a 7-bit slave address followed by an 8th bit, which indicates whether the transaction is a read-operation or a write-operation.

START and STOP Conditions:

SY8824C is controlled via an I²C compatible interface. The START condition is a HIGH to LOW transition of the SDA line while SCL is HIGH. The STOP condition is a LOW to HIGH transition on the SDA line while SCL is HIGH. A STOP condition must be sent before each START condition. The I²C master always generates the START and STOP conditions.

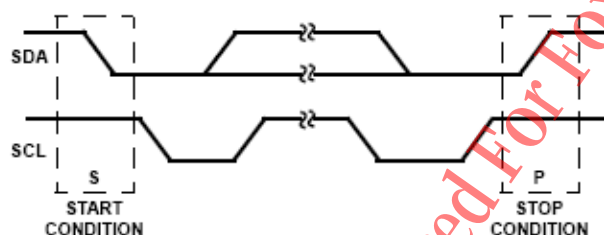


Figure3. START and STOP Conditions

Data Validity:

The data on the SDA line must be stable during the HIGH period of the SCL, unless generating a START or STOP condition. The HIGH or LOW state of the data line can only change when the clock signal on the SCL line is LOW.

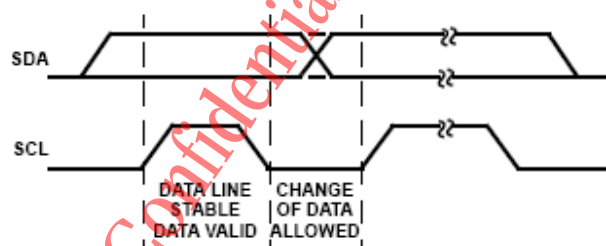


Figure4. Data Validity

Acknowledge:

Each address and data transmission uses 9-clock pulses. The ninth pulse is the acknowledge bit (ACK). After the START condition, the master sends 7-slave address bits and an R/W bit during the next 8-clock pulses. During the ninth clock pulse, the device that recognizes its own address holds the data line low to acknowledge. The acknowledge bit is also used by both the master and the slave to acknowledge receipt of register addresses and data.

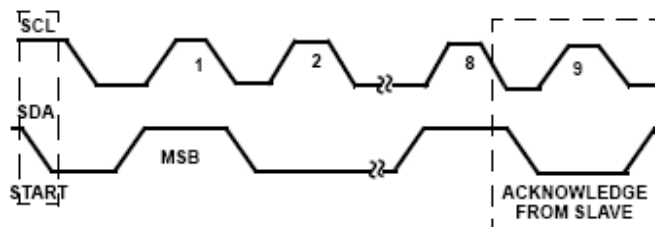


Figure5. Complete Data Transfer

Data Transactions:

All transactions start with a control byte sent from the I²C master device. The control byte begins with a START condition, followed by 7-bits of slave address (1100110x) for the SY8824C (this address can be changed if necessary) followed by the 8th bit, R/W bit. The R/W bit is 0 for a write or 1 for a read. If any slave devices on the I²C bus recognize their address, they will acknowledge by pulling the SDA line low for the last clock cycle in the control byte. If no slaves exist at that address or are not ready to communicate, the data line will be 1, indicating a Not Acknowledge condition. Once the control byte is sent, and SY8824C acknowledges it, the 2nd byte sent by the master must be a register address byte. The register address byte tells the SY8824C which register the master will write or read. Once the SY8824C receives a register address byte it responds with an acknowledge.

Write To A Register



Read From A Register




Figure 6. Data Transactions

Register Settings:

Register Name				VSEL0
Address				0x00
Field	Bit	R/W	Default	Description
BUCK_EN	7	R/W	1	Software buck enable. When EN pin is low, the regulator is off. When EN pin is high, BUCK_EN bit takes precedent.
MODE	6	R/W	0	0=Allow auto-PFM mode during light load. 1=Forced PWM mode
NSEL	5:0	R/W	010111 = 1.05V	000000 = 0.7625V 000001 = 0.775V 010111= 1.05V 111111=1.55V

Operation

SY8824C is a high efficiency 1.8MHz synchronous step down DC-DC regulator IC capable of delivering up to 4A output current. It can operate over a wide input voltage range from 2.6V to 5.5V and integrates main switch and synchronous switch with very low $R_{DS(ON)}$ to minimize the conduction loss. The output voltage can be programmed from 0.7625V to 1.55V through I²C interface.

Enabling Function

The EN pin controls SY8824C start up. EN pin low to high transition starts up the power up sequencer. If EN pin is low, the DC-DC converter will be turned off, and all registers are reset to default values.

SY8824C allows software enable of the regulator. BUCK_EN is initialized HIGH in the registers.

Table1. Hardware and Software Enable Control

Pin	Soft-ware bit	Output
EN	BUCK_EN	
0	x	OFF
1	0	OFF
1	1	ON

Input Over Voltage Protection Function

When the V_{IN} exceeds over voltage protection threshold, SY8824C will stop switching to protect the circuitry. An internal 20 μ s blanking time filter helps to prevent the circuit from shutting down due to noise spikes.

Applications Information

Because of the high integration in SY8824C, the application circuit based on this regulator IC is rather simple. Only input capacitor C_{IN} , output capacitor C_{OUT} , inductor L need to be selected for the targeted applications.

Input capacitor C_{IN}

This ripple current through input capacitor is calculated as:

$$I_{CIN_RMS} = I_{OUT} \times \sqrt{D(1-D)} \text{ (A)}$$

This formula has a maximum at $V_{IN}=2 \times V_{OUT}$ condition, where $I_{CIN_RMS}=I_{OUT}/2$.

With the maximum load current at 4A, a typical X5R or better grade ceramic capacitor with 6.3V rating and greater than 22 μ F capacitance can handle this ripple current well. To minimize the potential noise problem, place this ceramic capacitor really close to the VIN and GND pins. Care should be taken to minimize the loop area formed by C_{IN} , and VIN/GND pins.

Output inductor L

There are several considerations in choosing this inductor.

- 1) Choose the inductance to provide the desired ripple current. It is suggested to choose the ripple current to be about 40% of the maximum average input current. The inductance is calculated as:

$$L = \frac{V_{OUT}(1 - V_{OUT}/V_{IN_MAX})}{F_{SW} \times I_{OUT_MAX} \times 40\%} \text{ (H)}$$

where F_{SW} is the switching frequency and I_{OUT_MAX} is the maximum load current.

SY8824C is less sensitive to the ripple current variations. Consequently, the final choice of inductance can be slightly off the calculation value without significantly impacting the performance.

- 2) The saturation current rating of an inductor must be selected to guarantee an adequate margin to the peak inductor current under full load conditions.

$$I_{SAT, MIN} > I_{OUT, MAX} + \frac{V_{OUT}(1 - V_{OUT}/V_{IN, MAX})}{2 \cdot F_{SW} \cdot L}$$

- 3) The DCR of the inductor and the core loss at the switching frequency must be low enough to achieve the desired efficiency requirement. It is desirable to choose an inductor with $DCR < 15m\Omega$ to achieve a good overall efficiency.

Inductor vs. Output Capacitor

The ripple base control strategy need very little C_{OUT} to confirm stability. Too large inductor and C_{OUT} will lead to unstable. The recommend inductance and output capacitor is shown as below.

Table2. Inductance vs. Output Capacitor Selection (Note4)

L	C_{OUT}					
	10uF	22uF	22uFx2	22uFx3	22uFx4	22uFx5
0.33uH	×	√	√	√	√	×
0.47uH	×	√	√	√	×	×
0.68uH	×	√	√	×	×	×

Note 4: Use electrolytic capacitor will help stability because electrolytic capacitor has large ESR.

Layout Design

To achieve the higher efficiency and better noise immunity, following components should be placed close to the IC: C_{IN} , L and C_{OUT} .

1) It is desirable to maximize the PCB copper area connecting to GND pin to achieve the best thermal and noise performance. Reasonable vias are suggested to be placed underneath the ground pad to enhance the soldering quality and thermal performance

2) The decoupling capacitor of VIN and GND must be placed close enough to the pins. The loop area

formed by the capacitors and GND must be minimized.

3) The PCB copper area associated with LX pin must be minimized to improve the noise immunity.

4) The feedback trace connecting C_{OUT} to the FBS pin must NOT be adjacent to the LX node on the PCB layout to minimize the noise coupling to the FBS pin.

5) The PCB copper area associated with VIN pin must be routed across pin1 and pin8 to get better noise immunity and thermal performance.



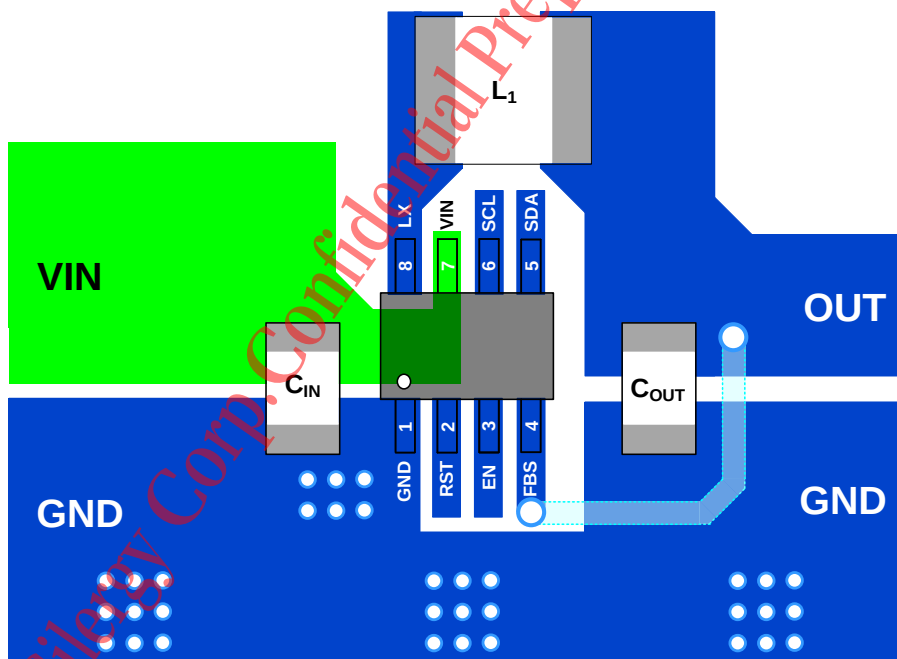


Figure7. SY8824CAIC PCB layout Suggestion


TSOT23-8 Package Outline Drawing

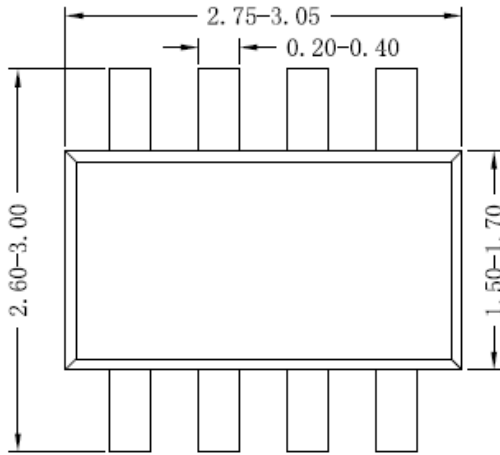


Top view

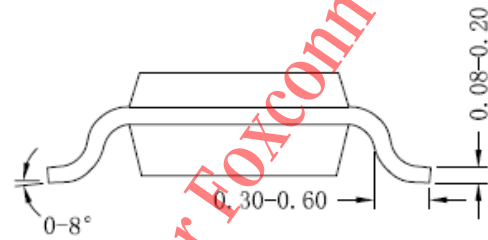

Side view A

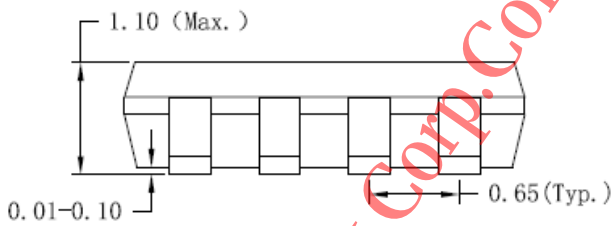

Side view B

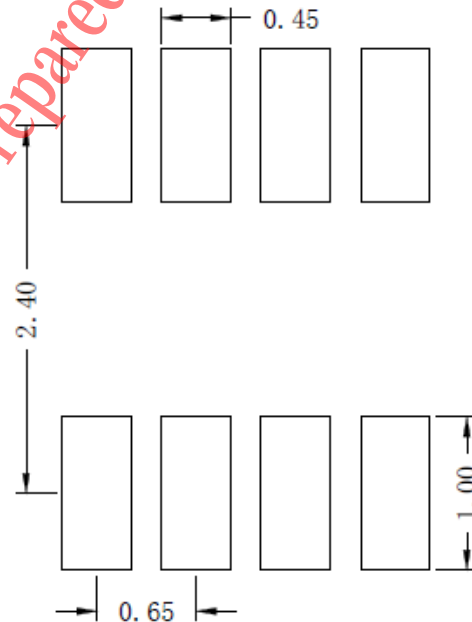


**Recommended PCB layout
(Reference only)**

Notes: All dimension in millimeter and exclude mold flash & metal burr


Taping & Reel Specification

1. Taping orientation

TSOT23-8

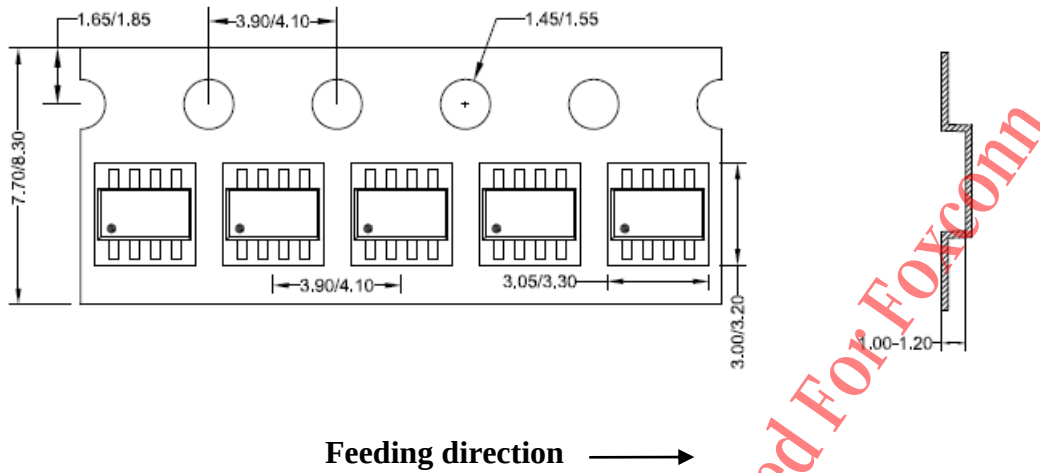

2. Carrier Tape & Reel specification for packages

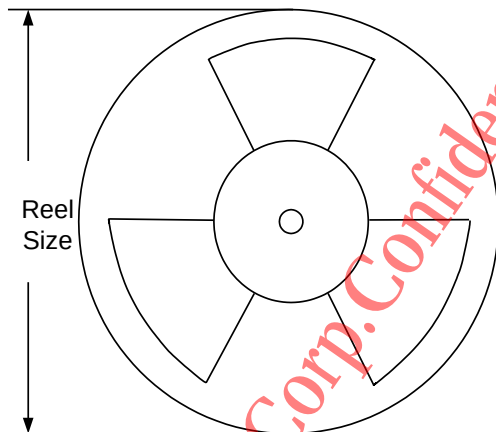

Package types	Tape width (mm)	Pocket pitch(mm)	Reel size (Inch)	Trailer * length(mm)	Leader * length (mm)	Qty per reel (pcs)
TSOT23-8	8	4	7	400	160	3000

3. Others: NA

IMPORTANT NOTICE

1. **Right to make changes.** Silergy and its subsidiaries (hereafter Silergy) reserve the right to change any information published in this document, including but not limited to circuitry, specification and/or product design, manufacturing or descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products are sold subject to Silergy's standard terms and conditions of sale.

2. **Applications.** Application examples that are described herein for any of these products are for illustrative purposes only. Silergy makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Buyers are responsible for the design and operation of their applications and products using Silergy products. Silergy or its subsidiaries assume no liability for any application assistance or designs of customer products. It is customer's sole responsibility to determine whether the Silergy product is suitable and fit for the customer's applications and products planned. To minimize the risks associated with customer's products and applications, customer should provide adequate design and operating safeguards. Customer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Silergy assumes no liability related to any default, damage, costs or problem in the customer's applications or products, or the application or use by customer's third-party buyers. Customer will fully indemnify Silergy, its subsidiaries, and their representatives against any damages arising out of the use of any Silergy components in safety-critical applications. It is also buyers' sole responsibility to warrant and guarantee that any intellectual property rights of a third party are not infringed upon when integrating Silergy products into any application. Silergy assumes no responsibility for any said applications or for any use of any circuitry other than circuitry entirely embodied in a Silergy product.

3. **Limited warranty and liability.** Information furnished by Silergy in this document is believed to be accurate and reliable. However, Silergy makes no representation or warranty, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall Silergy be liable for any indirect, incidental, punitive, special or consequential damages, including but not limited to lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges, whether or not such damages are based on tort or negligence, warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Silergy's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Standard Terms and Conditions of Sale of Silergy.

4. **Suitability for use.** Customer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of Silergy components in its applications, notwithstanding any applications-related information or support that may be provided by Silergy. Silergy products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Silergy product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Silergy assumes no liability for inclusion and/or use of Silergy products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

5. **Terms and conditions of commercial sale.** Silergy products are sold subject to the standard terms and conditions of commercial sale, as published at <http://www.silergy.com/stdterms>, unless otherwise agreed in a valid written individual agreement specifically agreed to in writing by an authorized officer of Silergy. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Silergy hereby expressly objects to and denies the application of any customer's general terms and conditions with regard to the purchase of Silergy products by the customer.

6. **No offer to sell or license.** Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights. Silergy makes no representation or warranty that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right. Information published by Silergy regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from Silergy under the patents or other intellectual property of Silergy.

For more information, please visit: www.silergy.com

© 2018 Silergy Corp.

All Rights Reserved.