

Swan soundbar

Speaker cable drawings for control run + Pre-MP + MP(~15K)




ALT Co., Ltd.

Issued Date 2021.08.24

Ver.1.0



Issued by SH, SON

SPEC_4AI20-CMXX04 – Left channel speaker cable drawing

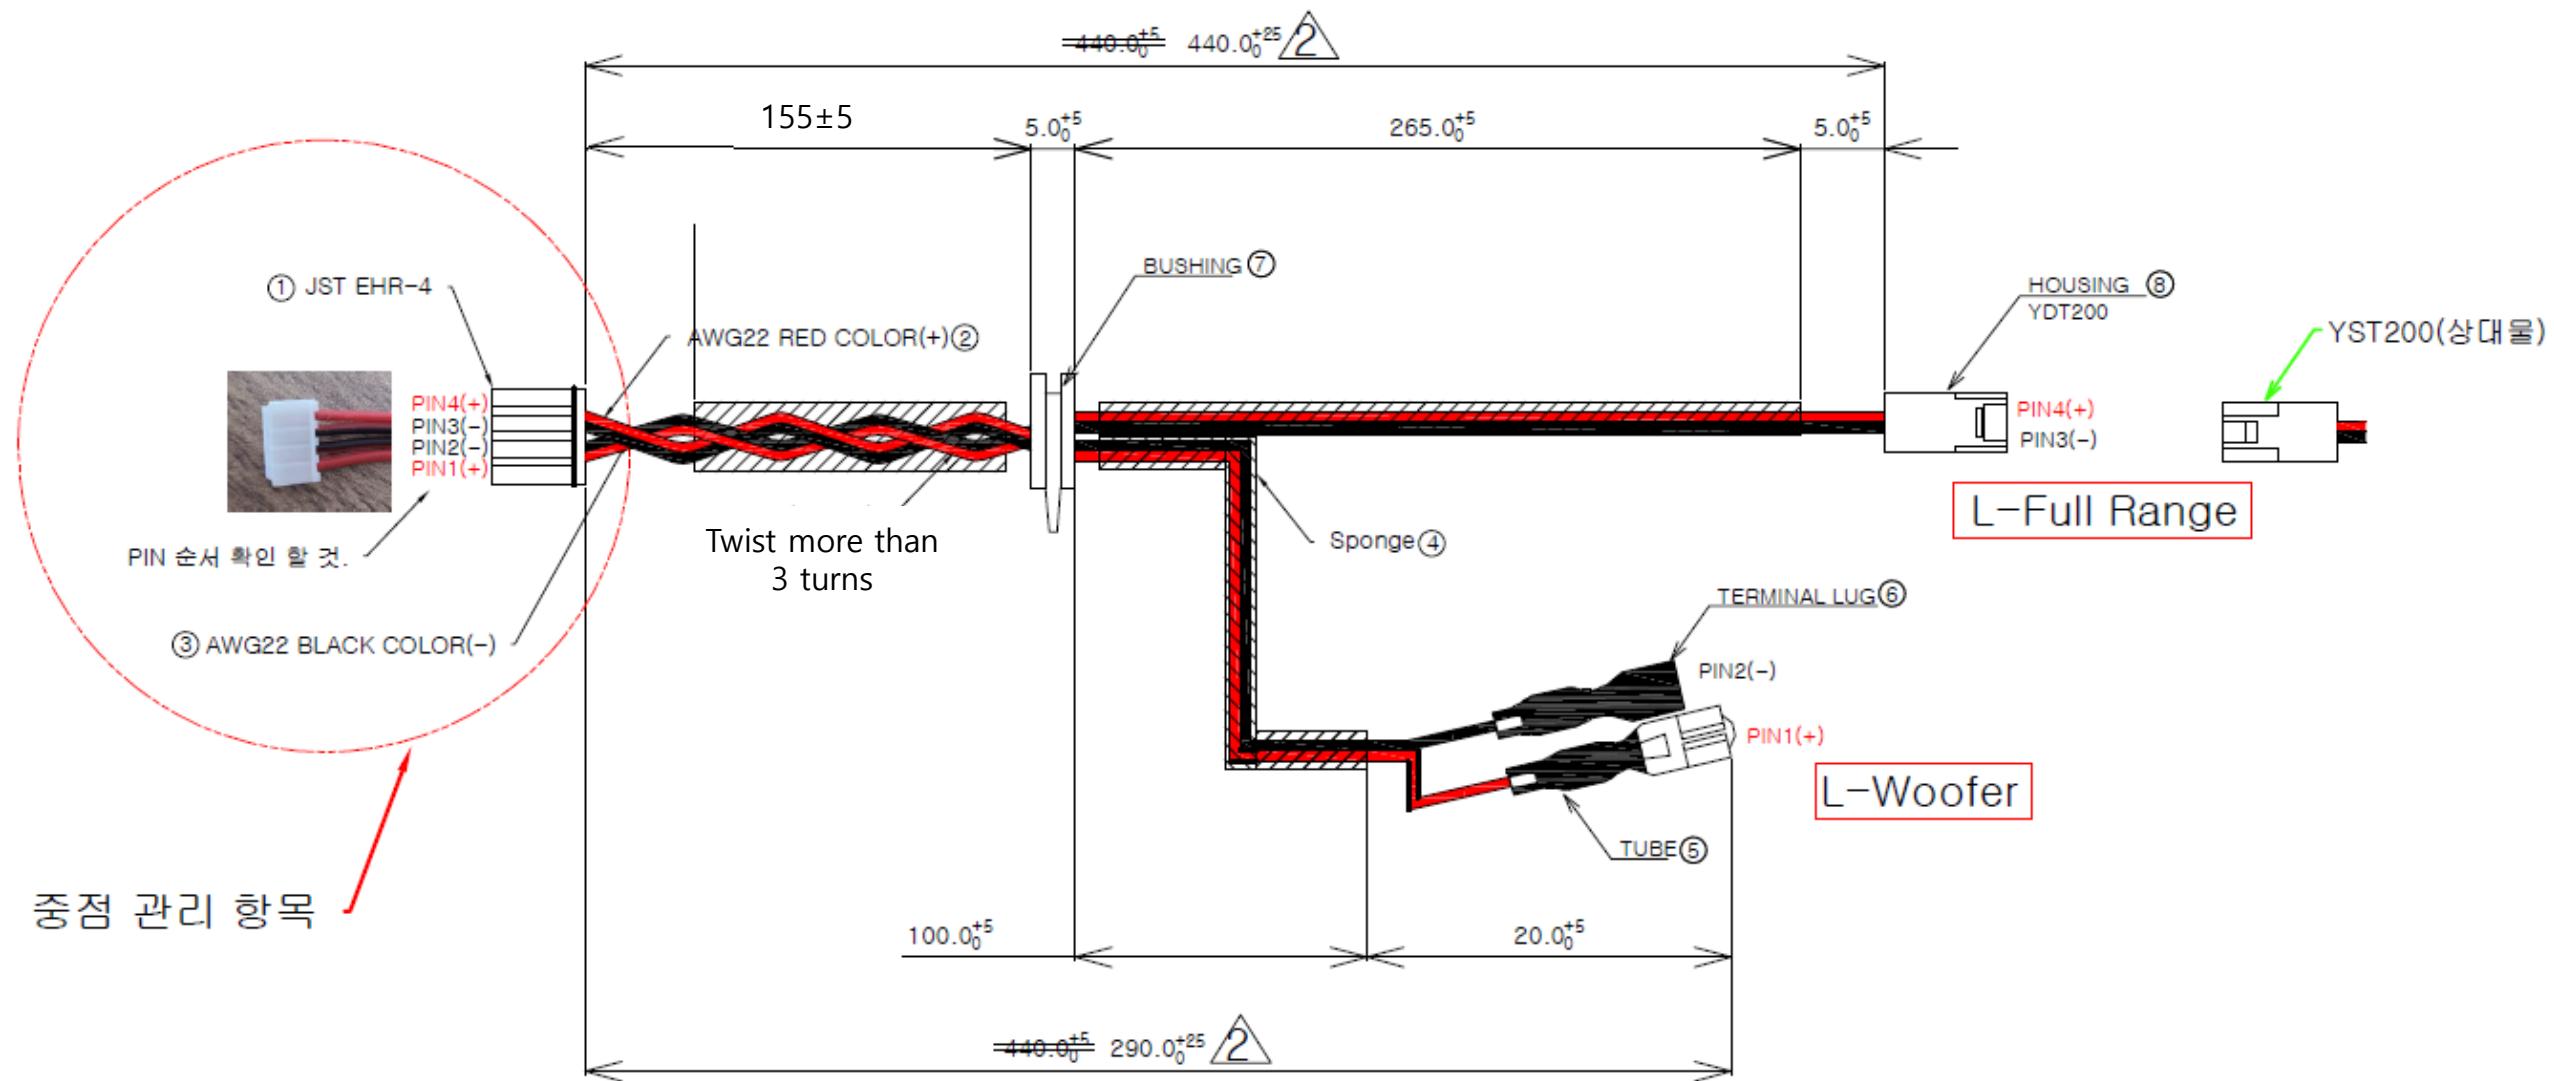


- Due to cable twist **rework by hand**, twist length may vary.
- Rework cable will be supplied up to 15K production.
 - After 15K, will be supplied the drawing dimensions by **machine work**.
- Request to factory
 - Skip the IQC on cable twist spec
 - If the cable length is longer than the guide, please twist more when final assembly
 - Please refer to the guide for next page

SPEC_4AI20-CMXX04 – Left channel speaker cable

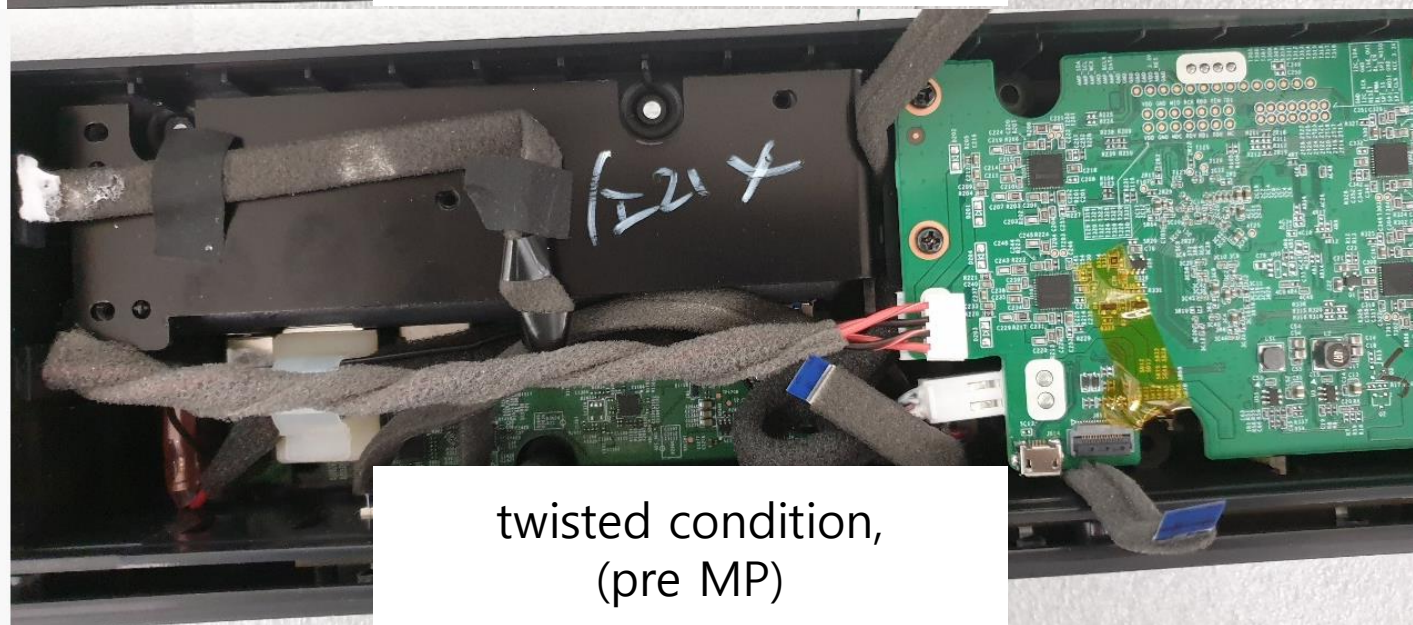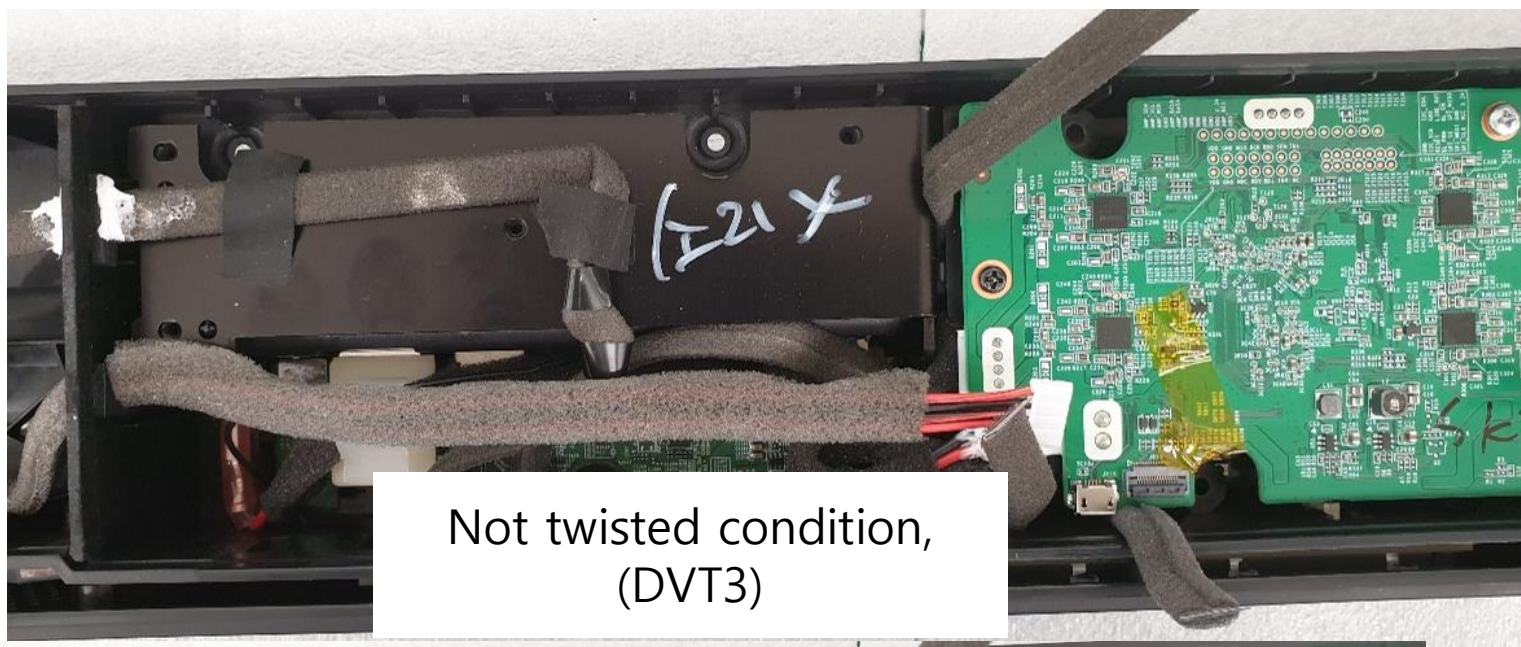


SPEC_4AI20-CMXX04 – Left channel speaker cable


- The speaker connector should be placed on the silk area
 - if the speaker connector is not placed on the silk area, please twist the cable
 - See below min / max cable length example

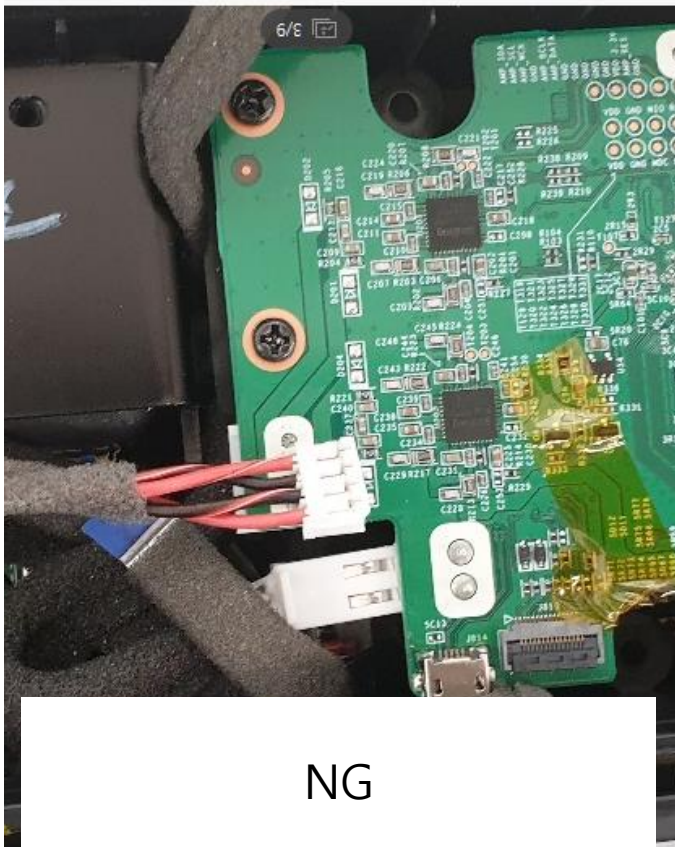

NG

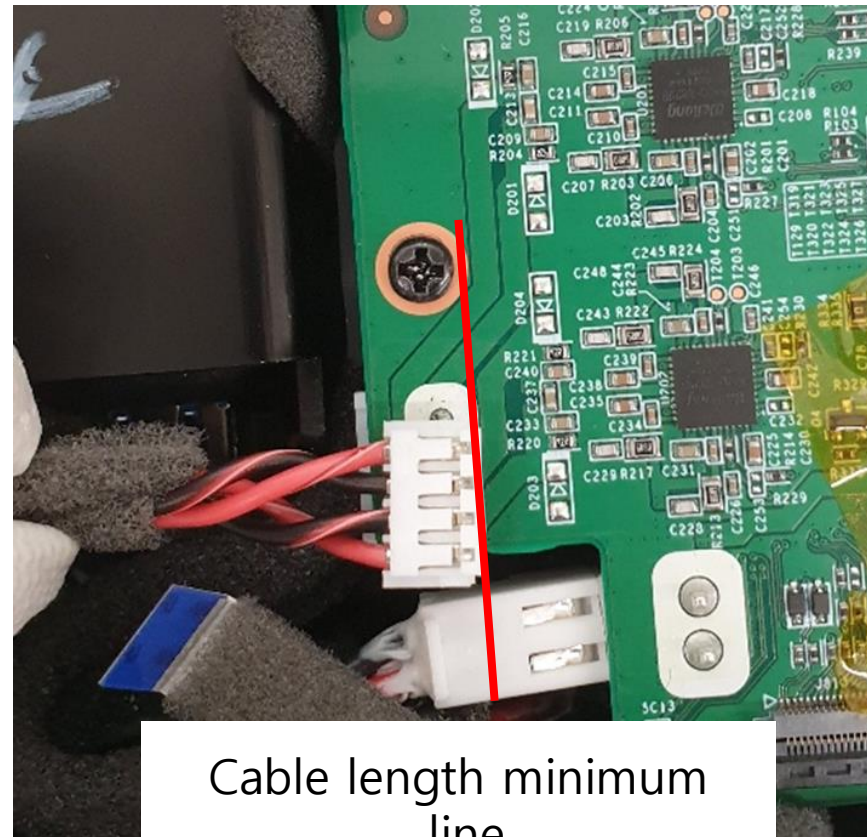

Cable length minimum
line

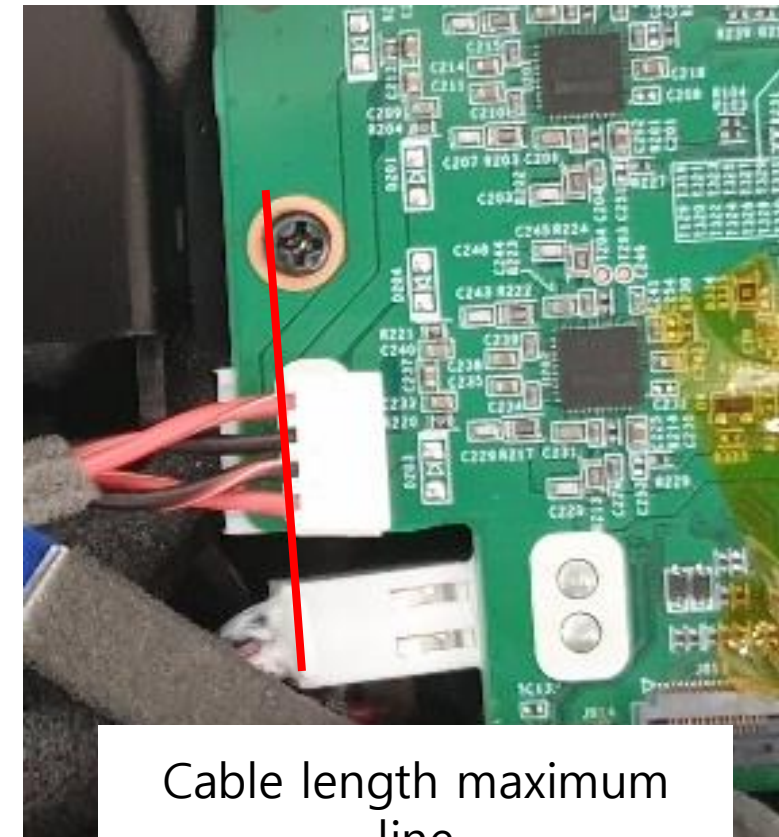

Cable length maximum
line

- Work completion example



Cable twisted condition



Cable twisted condition