

SWAN Sound Bar EQ 설정값


May. 2021

Wellang Co.,Ltd.

Full Range Speaker

☐ EQ graph																
BQF1	BQF2	BQF3	BQF4	BQF5	BQF6	BQF7	BQF8	BQF9	BQF10	BQF11	BQF12	BQF13	BQF14	BQF15	BQF16	
HPF	HPF	Peakir	Peakir	Peakir	Peakir	Peakir	Peakir	ByPas	ByPas	ByPas	ByPas	ByPas	ByPas	ByPas	ByPas	
710	600	670	1700	5300	2800	8500	17000	20	20	20	20	20	20	20	20	
-11.16	1.00	1.89	5.79	-5.37	2.11	2.21	-3.47	1.00	1.00	1.00	1.00	1.00	1.00	1.00	1.00	
0.70	0.70	2.00	0.70	0.70	0.70	2.00	2.00	0.70	0.70	0.70	0.70	0.70	0.70	0.70	0.70	


Filter Design FR

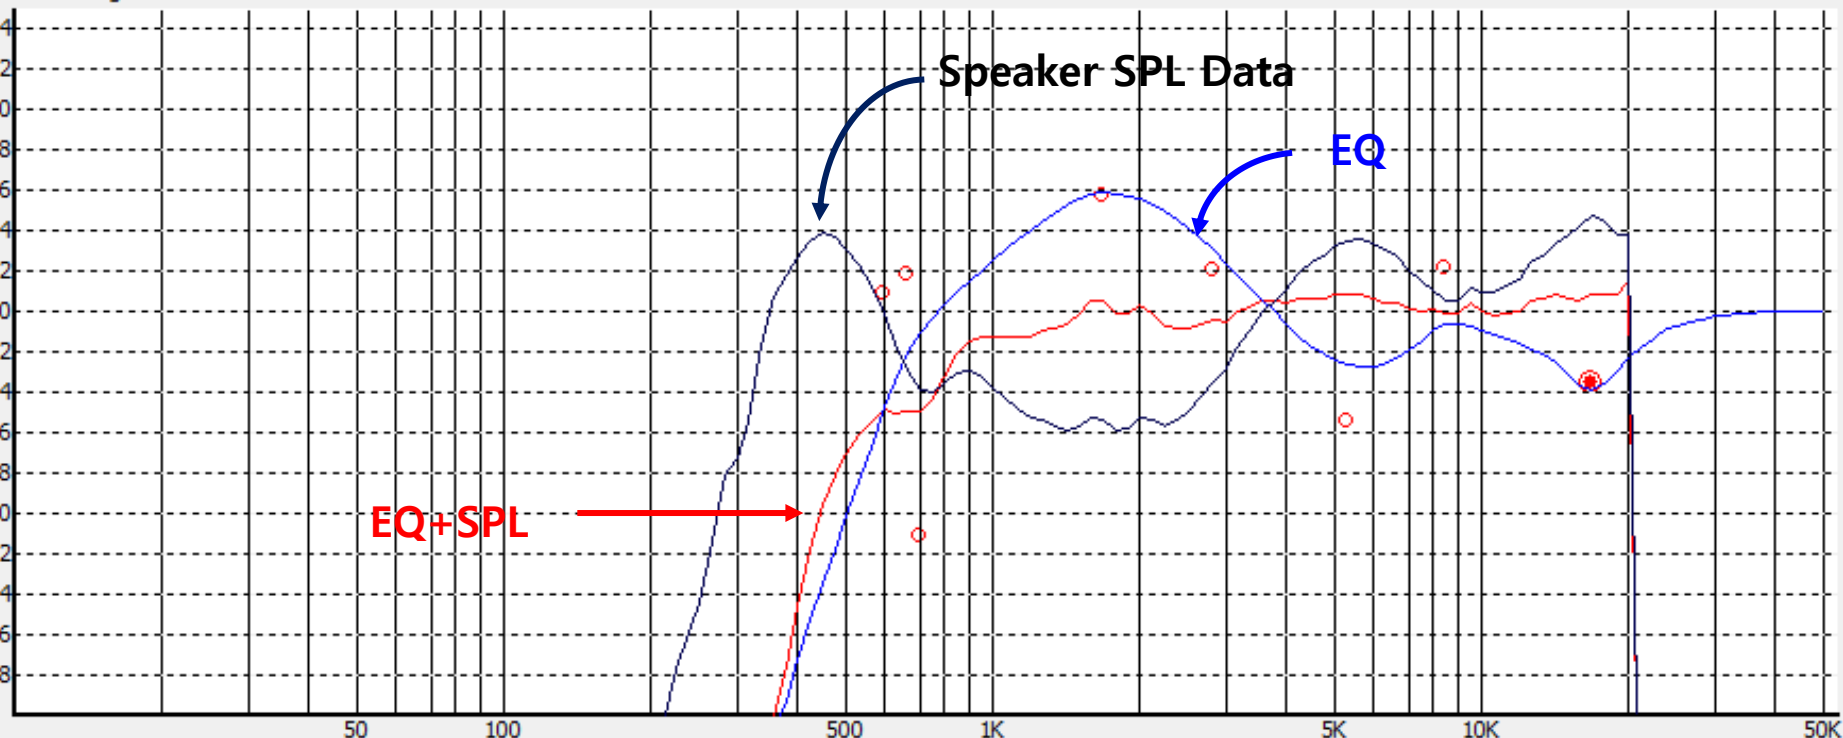

- Full Range Speaker의 SPL Data Loading후 EQ로 조절
- Cross over Frequency : 600Hz 설정


☐ EQ graph

BQF1	BQF2	BQF3	BQF4	BQF5	BQF6	BQF7	BQF8	BQF9	BQF10	BQF11	BQF12	BQF13	BQF14	BQF15	BQF16
LPF ▾	LPF ▾	Peakir ▾	Peakir ▾	Peakir ▾	Peakir ▾	HPF ▾	HPF ▾	ByPas ▾	ByPas ▾	ByPas ▾	ByPas ▾	ByPas ▾	ByPas ▾	ByPas ▾	ByPas ▾
600	600	170	355	50	112	30	30	20	20	20	20	20	20	20	20
1.0	1.0	2.00	-1.47	12.42	-3.26	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1	1
0.7	0.7	2	0.7	1	-3	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7	0.7

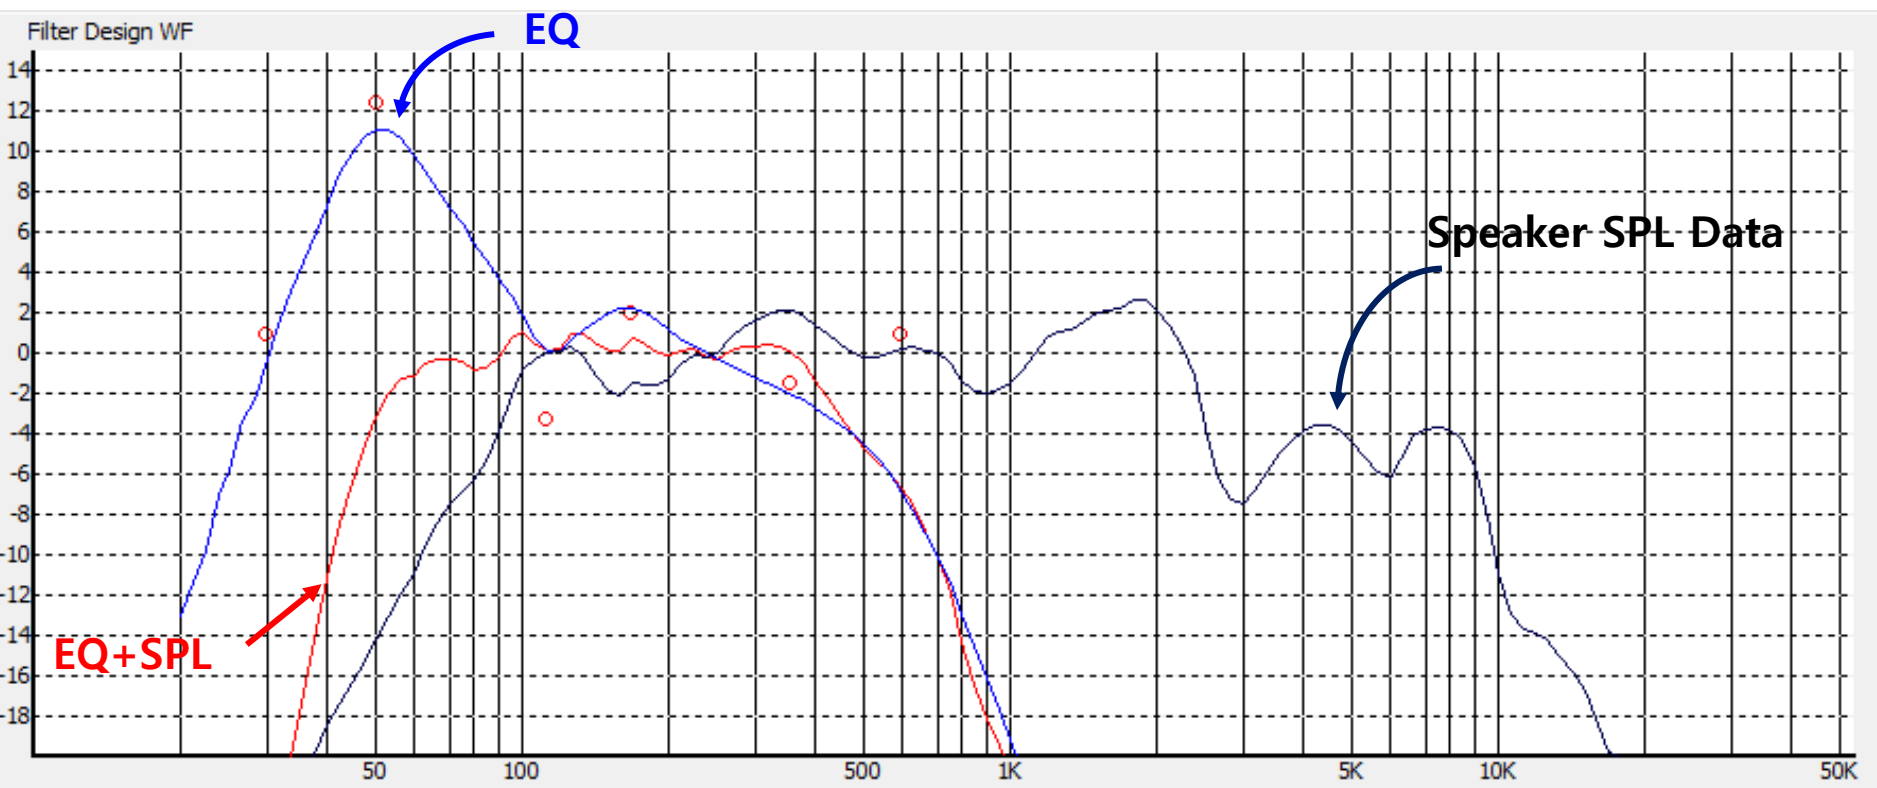

- Woofer Speaker의 SPL Data Loading후 EQ로 조절
- Cross over Frequency : 600Hz 설정

2Way Speaker

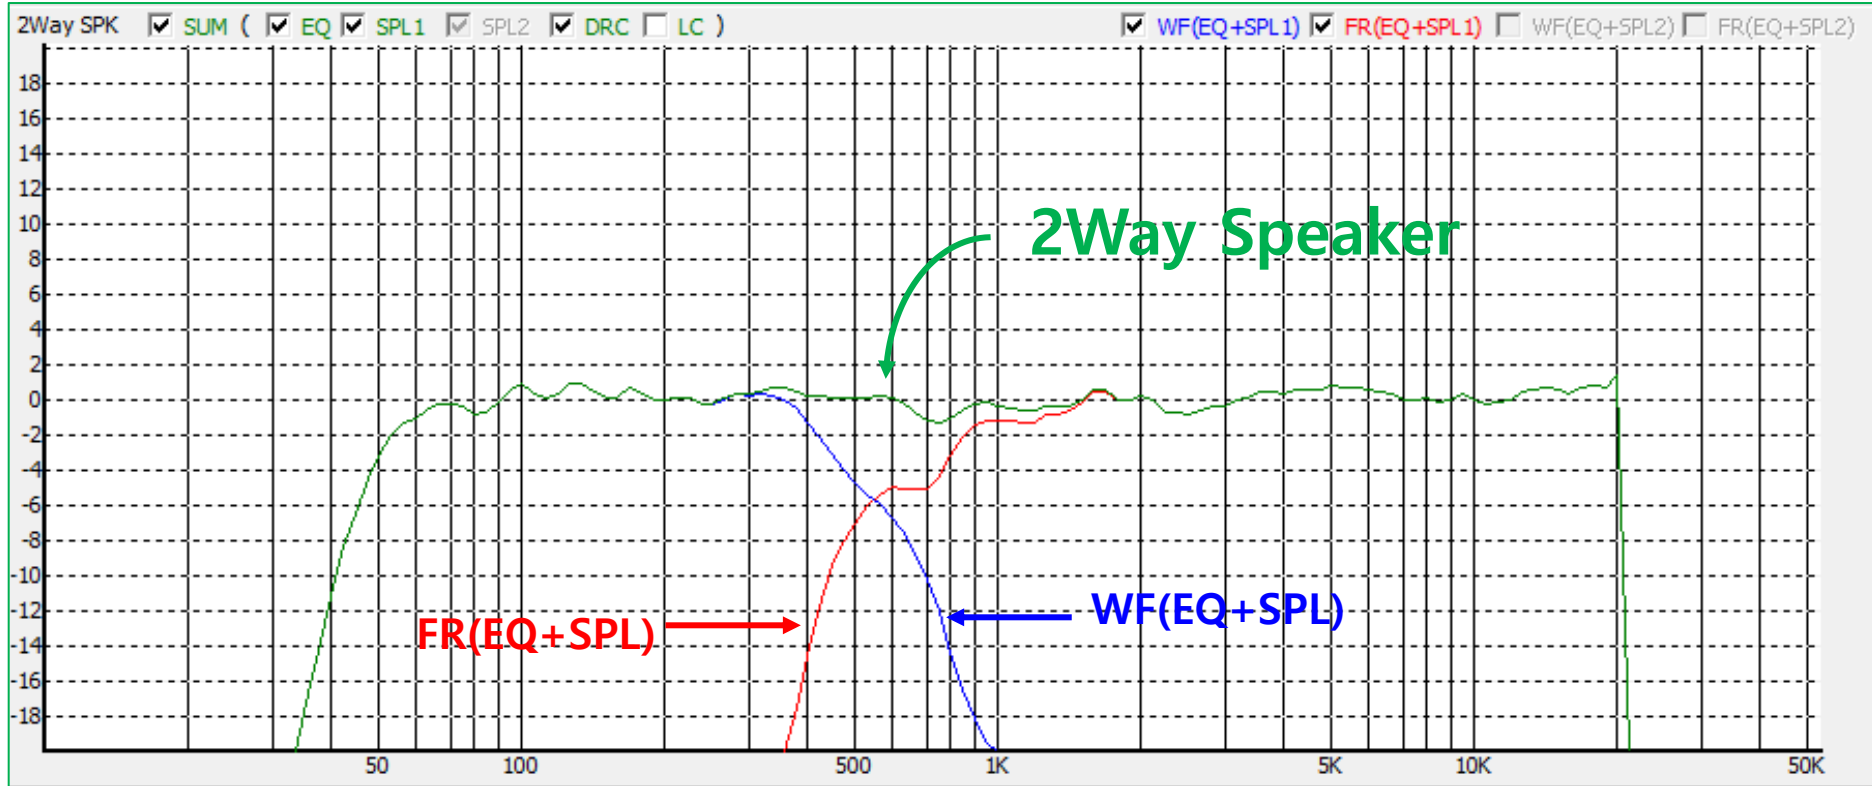

- Full Range Speaker(EQ+SPL Data) + Woofer Speaker(EQ+SPL Data) = 2Way Speaker
- Cross over Frequency : 600Hz 설정