


PSA

PASSIVE SYSTEM ALLIANCE
INPAQ TECHNOLOGY CO., LTD.

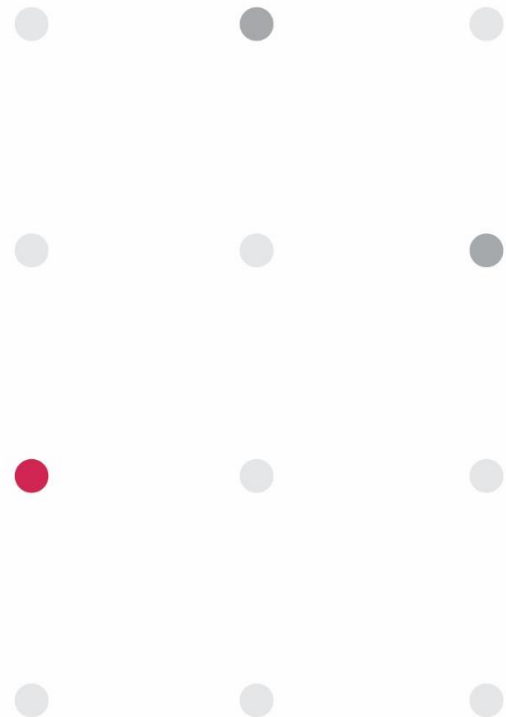

Korea Soundbar

Version : V 0.1
Released Date :2020/08/07

Prepared by : ShaoJun Peng

Checked by : Leeting Hsieh

Approved by : ZhiWei Chen

Contents

- 1.Revised History
- 2.Requirement of Antenna Design and Measurement
- 3.Return Loss Results
- 4.3D Radiation Pattern Results
- 5.Results Summary (peak gain, efficiency)
- 6.Conclusion & Comments

Antenna Design history

Released Date	Version	Record
Jul. 17th, 2020	0.0	Antenna test report
Aug. 07th, 2020	0.1	Structural environment update antenna test report

Requirements of Antenna Design and Measurement



Requirements of Antenna Design

RF Function	Number of ANT	Frequency Band	Remark
BT	1	2400 – 2500MHz	

Requirements of Measurement

Test Item	Specification	Remark
Return Loss	< -10dB	
Peak gain	< 3dBi	
Efficiency	> 50%	

Antenna Placement & Solution

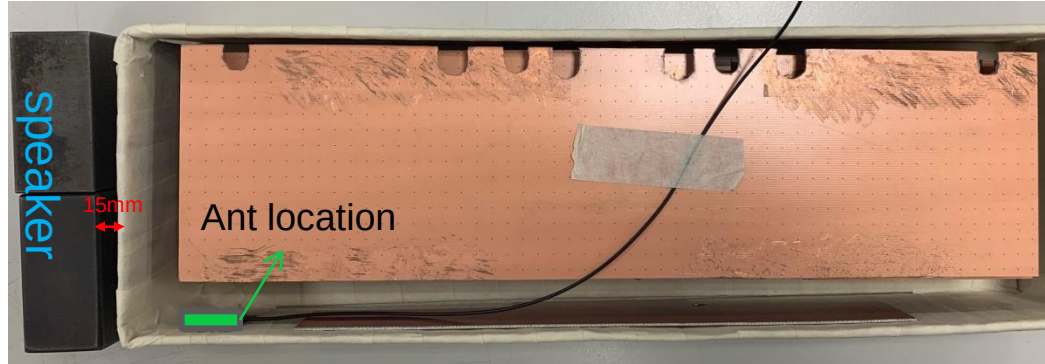


Antenna	Size (L * W * H)	Cable Type
A1	30mm*15mm*0.4mm	$\Phi=1.13$



Return Loss Results

A1

[2400 – 2500MHz]

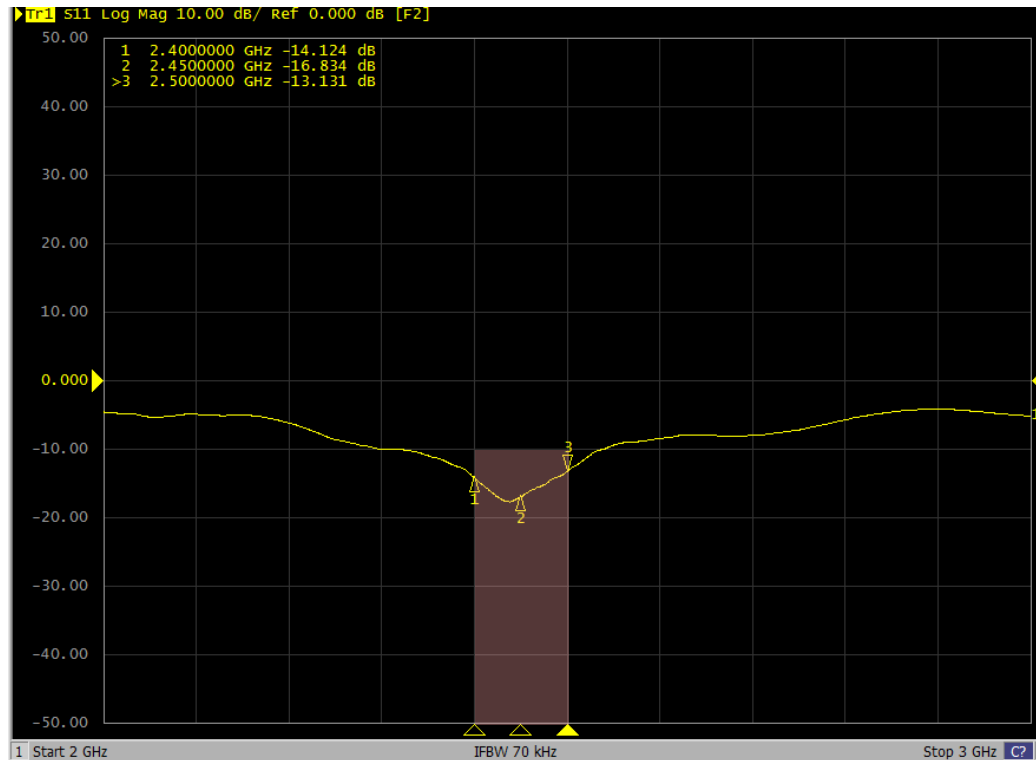

3D Radiation Pattern Results

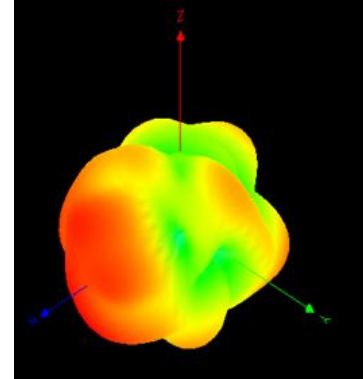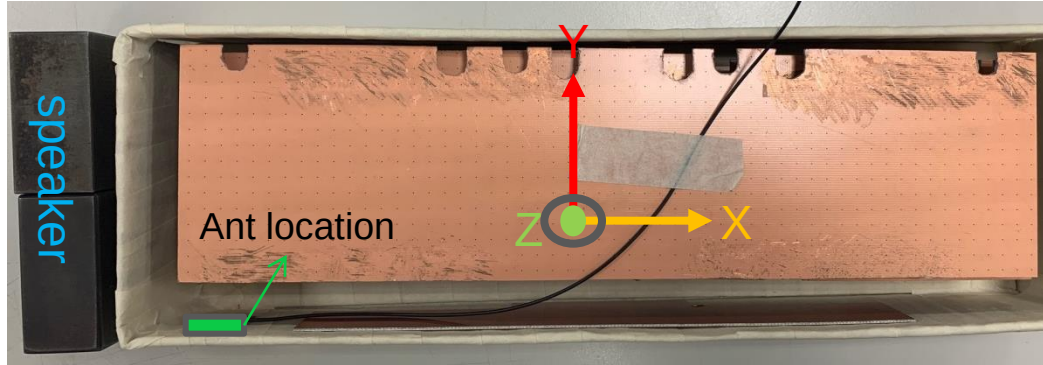

Results Summary

Peak gain & Efficiency

Frequency (MHz)	Peak Gain (dBi)	Efficiency (%)
2400	2.27	51.61
2450	2.82	52.43
2500	2.2	51.38

3. Conclusions

Antenna Performance Summary

1. It is recommended that the speaker be more than 15mm away from the case.
2. The specifications as shown in the figure are up to the standard.

Test Item	Specification	Result
Return Loss	< -10dB	OK
Peak gain	< 3dBi	OK
Efficiency	> 50%	OK

Thank you

本資料均屬機密，僅供指定之收件人使用，未經寄件人許可不得揭露、複製或散佈本信件。

This message and any attachments are confidential and may be legally privileged. Any unauthorized review, use or distribution by anyone other than the intended recipient is strictly prohibited. If you are not the intended recipient, please immediately notify the sender, completely delete this documents, and destroy all copies. Your cooperation will be highly appreciated.