

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

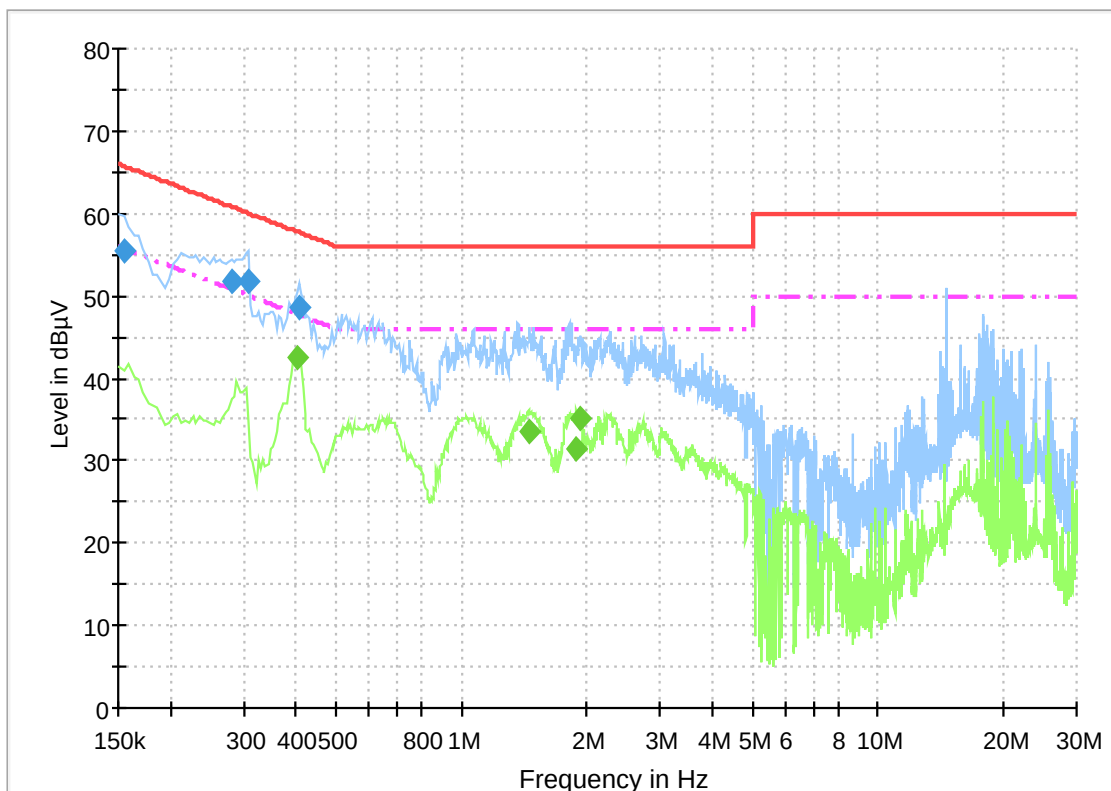

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	55.4	3000.0	9.000	On	L1	9.9	10.4	65.8
0.280500	51.9	3000.0	9.000	On	L1	9.8	8.9	60.8
0.307500	51.7	3000.0	9.000	On	L1	9.8	8.3	60.0
0.406500	48.5	3000.0	9.000	On	L1	10.0	9.3	57.7

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.402000	42.4	3000.0	9.000	On	L1	10.0	5.4	47.8
1.450500	33.6	3000.0	9.000	On	L1	9.9	12.4	46.0
1.891500	31.4	3000.0	9.000	On	L1	9.8	14.6	46.0
1.932000	35.1	3000.0	9.000	On	L1	9.8	10.9	46.0