

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

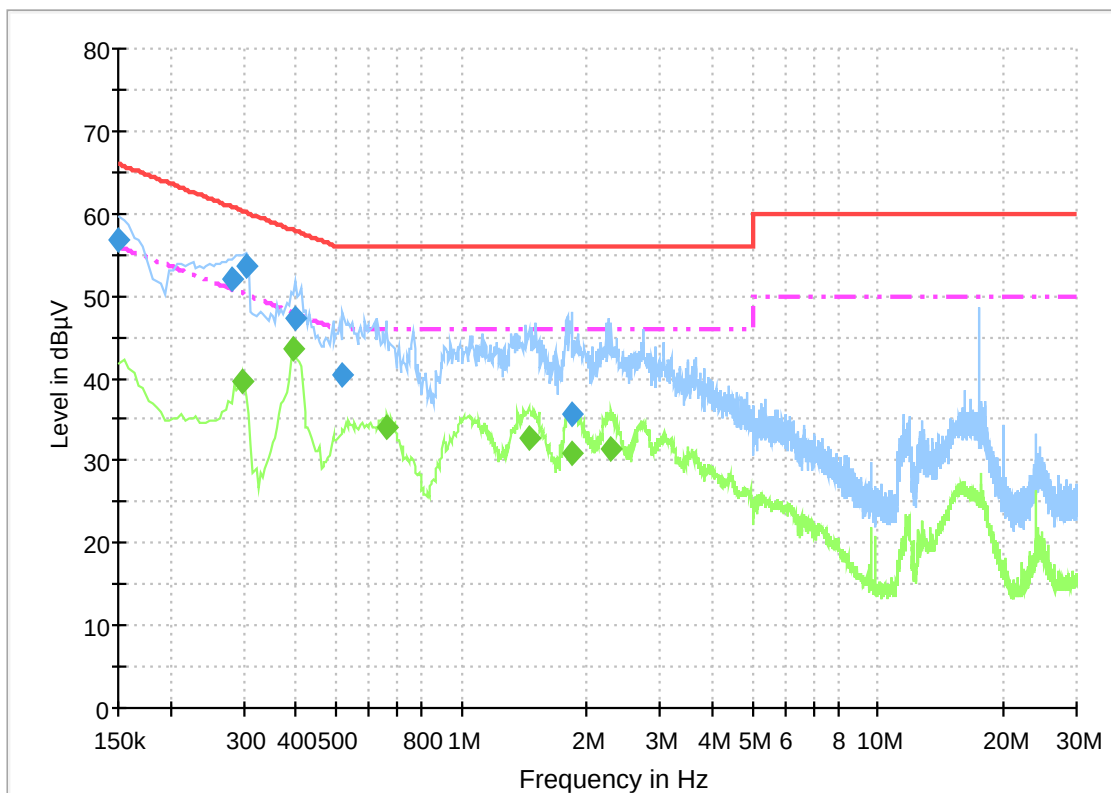

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	56.7	3000.0	9.000	On	N	9.8	9.3	66.0
0.280500	52.1	3000.0	9.000	On	N	9.8	8.7	60.8
0.303000	53.5	3000.0	9.000	On	N	9.8	6.7	60.2
0.397500	47.1	3000.0	9.000	On	N	10.0	10.8	57.9
0.519000	40.5	3000.0	9.000	On	N	10.0	15.5	56.0
1.842000	35.8	3000.0	9.000	On	N	9.8	20.2	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.298500	39.6	3000.0	9.000	On	N	9.8	10.7	50.3
0.393000	43.5	3000.0	9.000	On	N	10.0	4.5	48.0
0.663000	34.1	3000.0	9.000	On	N	10.0	11.9	46.0
1.450500	32.7	3000.0	9.000	On	N	9.9	13.3	46.0
1.833000	30.8	3000.0	9.000	On	N	9.8	15.2	46.0
2.292000	31.4	3000.0	9.000	On	N	9.8	14.6	46.0