

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1

Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0


LISN: Correction Table: 3CE Cable Loss

ENV216 FO(101235)

Correction Table (Line 0): ENV216_FO_N(101235)

Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

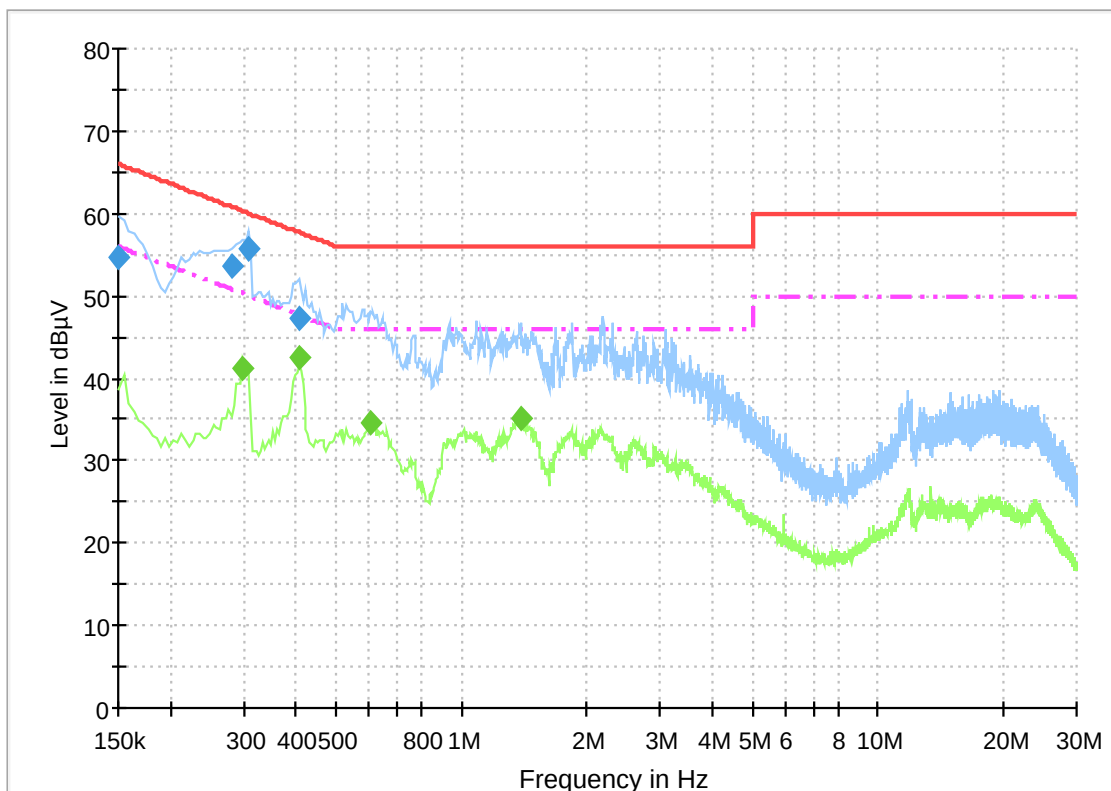

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	54.8	3000.0	9.000	On	L1	9.8	11.2	66.0
0.280500	53.6	3000.0	9.000	On	L1	9.8	7.2	60.8
0.307500	55.7	3000.0	9.000	On	L1	9.8	4.4	60.0
0.406500	47.3	3000.0	9.000	On	L1	10.0	10.5	57.7

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.298500	41.3	3000.0	9.000	On	L1	9.8	9.0	50.3
0.406500	42.6	3000.0	9.000	On	L1	10.0	5.2	47.7
0.604500	34.6	3000.0	9.000	On	L1	10.0	11.4	46.0
1.392000	35.1	3000.0	9.000	On	L1	9.9	10.9	46.0