

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

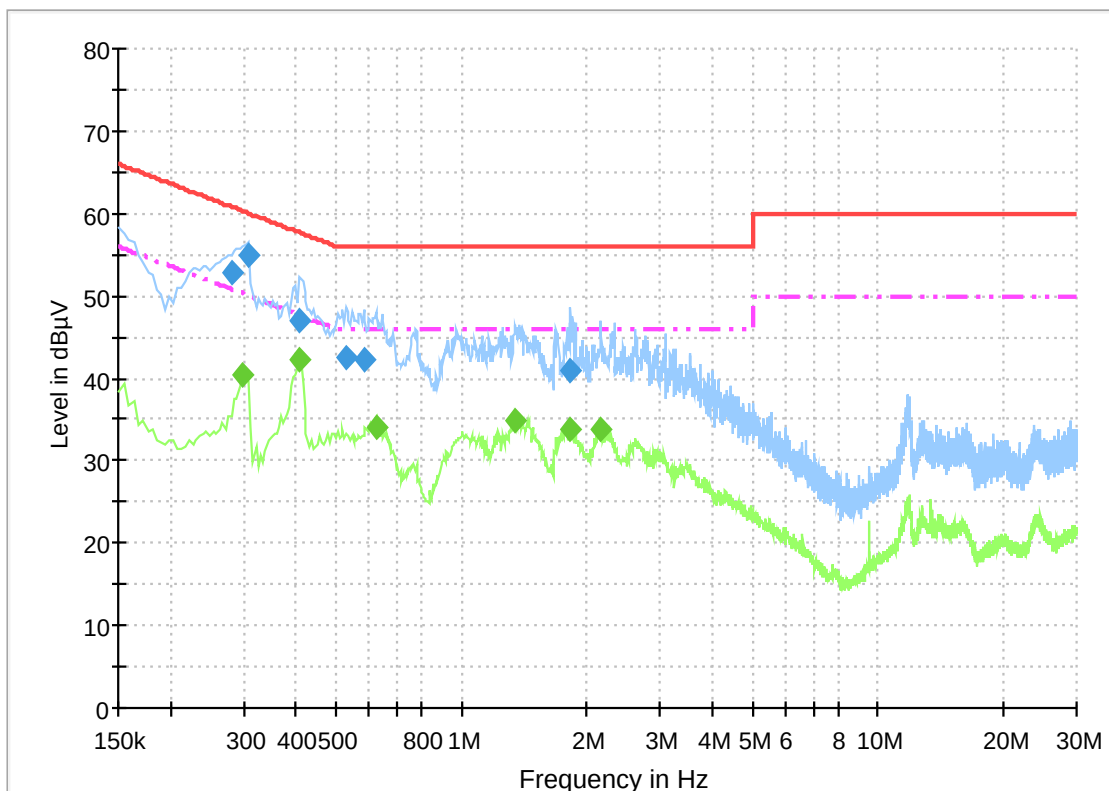

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.280500	52.9	3000.0	9.000	On	N	9.8	7.9	60.8
0.307500	55.0	3000.0	9.000	On	N	9.8	5.0	60.0
0.406500	47.1	3000.0	9.000	On	N	10.0	10.6	57.7
0.528000	42.6	3000.0	9.000	On	N	10.0	13.4	56.0
0.582000	42.3	3000.0	9.000	On	N	10.0	13.7	56.0
1.828500	41.0	3000.0	9.000	On	N	9.8	15.0	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.298500	40.5	3000.0	9.000	On	N	9.8	9.8	50.3
0.406500	42.4	3000.0	9.000	On	N	10.0	5.4	47.7
0.622500	34.0	3000.0	9.000	On	N	10.0	12.0	46.0
1.351500	35.0	3000.0	9.000	On	N	9.9	11.0	46.0
1.824000	33.9	3000.0	9.000	On	N	9.8	12.1	46.0
2.161500	33.9	3000.0	9.000	On	N	9.8	12.1	46.0