

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

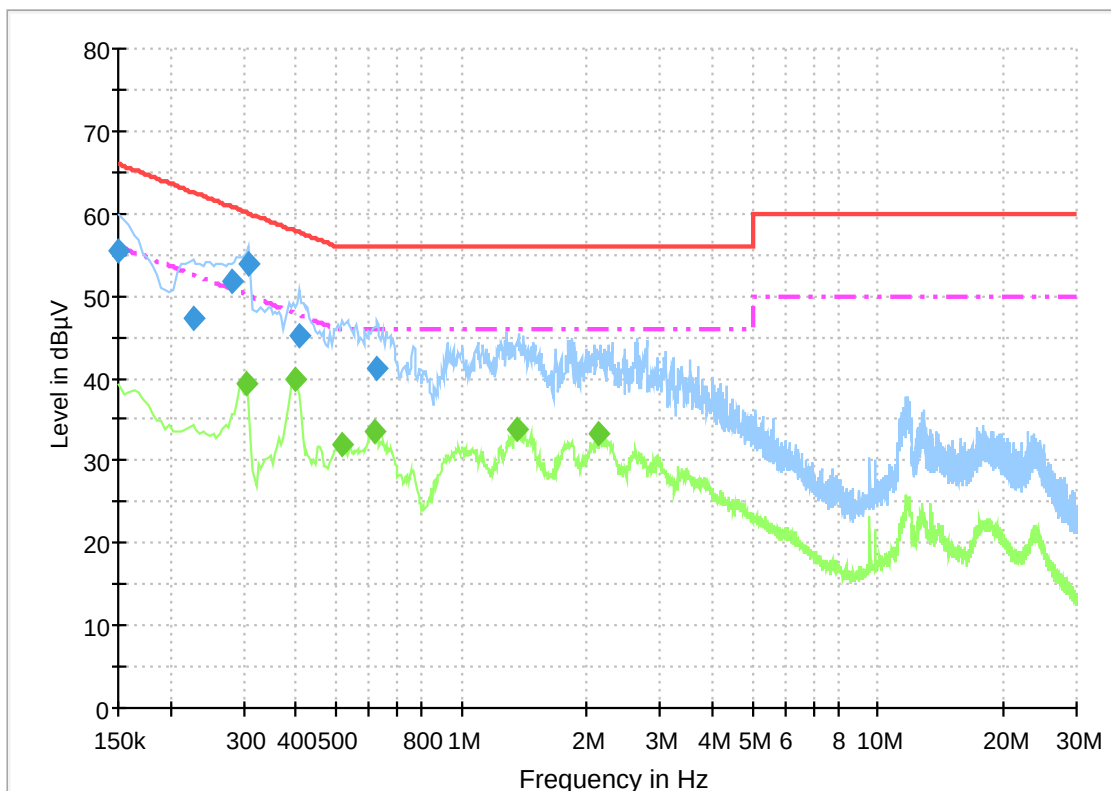

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	55.4	3000.0	9.000	On	N	9.8	10.6	66.0
0.226500	47.3	3000.0	9.000	On	N	9.8	15.2	62.6
0.280500	51.7	3000.0	9.000	On	N	9.8	9.1	60.8
0.307500	54.0	3000.0	9.000	On	N	9.8	6.1	60.0
0.406500	45.1	3000.0	9.000	On	N	10.0	12.6	57.7
0.627000	41.1	3000.0	9.000	On	N	10.0	14.9	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	39.3	3000.0	9.000	On	N	9.8	10.9	50.2
0.397500	39.8	3000.0	9.000	On	N	10.0	8.1	47.9
0.514500	32.0	3000.0	9.000	On	N	10.0	14.0	46.0
0.618000	33.4	3000.0	9.000	On	N	10.0	12.6	46.0
1.356000	33.8	3000.0	9.000	On	N	9.9	12.2	46.0
2.143500	33.2	3000.0	9.000	On	N	9.8	12.8	46.0