

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

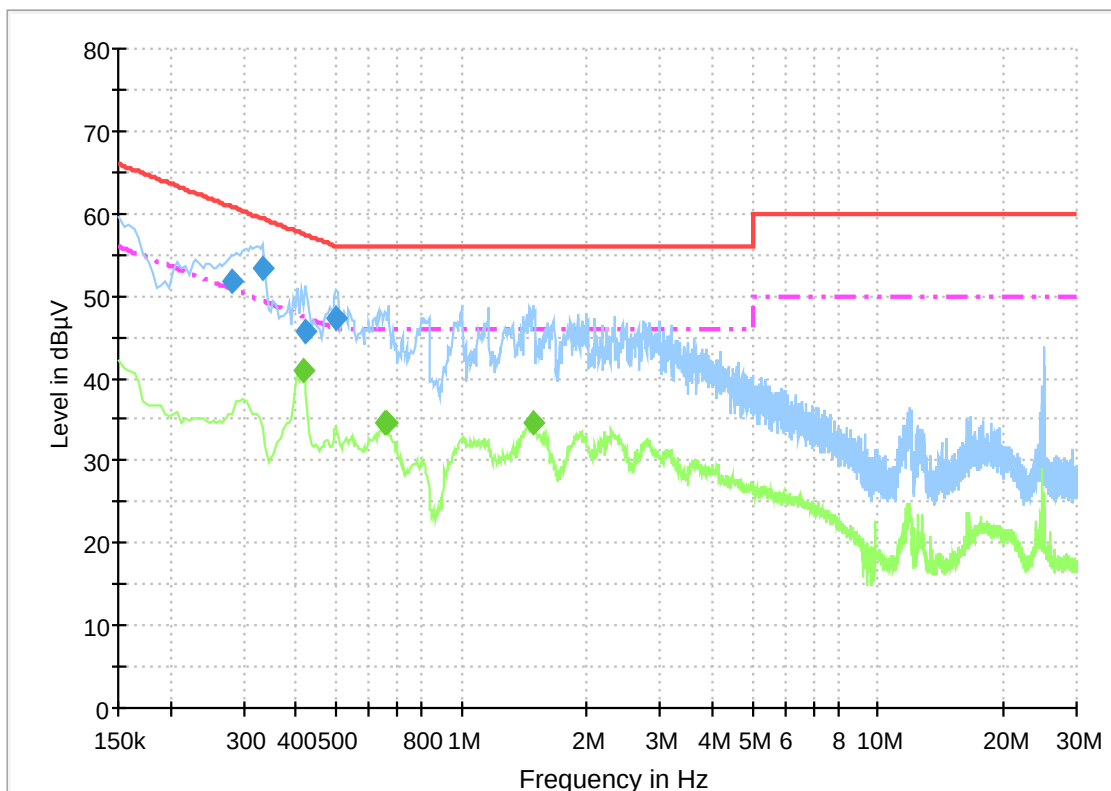

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.280500	51.8	3000.0	9.000	On	L1	9.8	9.0	60.8
0.334500	53.4	3000.0	9.000	On	L1	9.9	6.0	59.3
0.420000	45.7	3000.0	9.000	On	L1	10.0	11.7	57.4
0.501000	47.3	3000.0	9.000	On	L1	10.0	8.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.415500	40.8	3000.0	9.000	On	L1	10.0	6.7	47.5
0.654000	34.5	3000.0	9.000	On	L1	10.0	11.5	46.0
0.663000	34.5	3000.0	9.000	On	L1	10.0	11.5	46.0
1.486500	34.6	3000.0	9.000	On	L1	9.9	11.4	46.0