

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

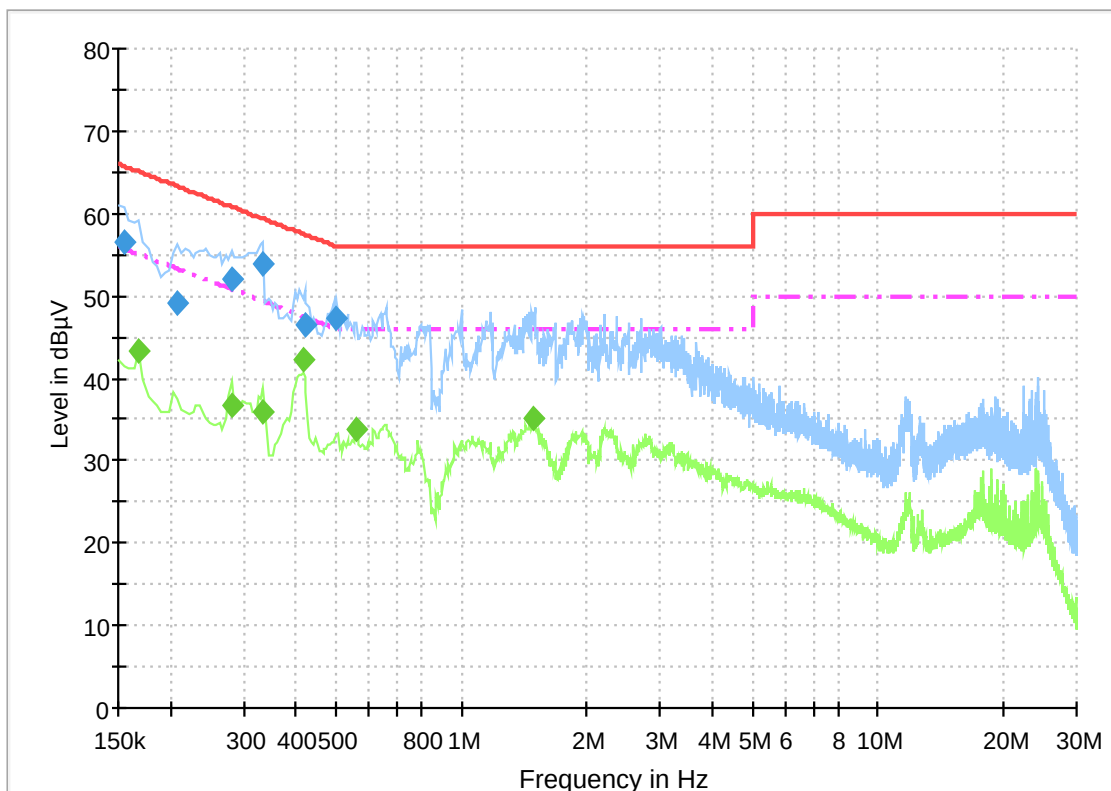

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.154500	56.4	3000.0	9.000	On	N	9.9	9.3	65.8
0.208500	49.1	3000.0	9.000	On	N	9.9	14.1	63.3
0.280500	52.0	3000.0	9.000	On	N	9.8	8.8	60.8
0.334500	53.8	3000.0	9.000	On	N	9.9	5.5	59.3
0.420000	46.4	3000.0	9.000	On	N	10.0	11.1	57.4
0.501000	47.3	3000.0	9.000	On	N	10.0	8.7	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.168000	43.3	3000.0	9.000	On	N	10.1	11.7	55.1
0.280500	36.6	3000.0	9.000	On	N	9.8	14.2	50.8
0.334500	36.0	3000.0	9.000	On	N	9.9	13.3	49.3
0.415500	42.2	3000.0	9.000	On	N	10.0	5.3	47.5
0.559500	33.8	3000.0	9.000	On	N	10.0	12.2	46.0
1.491000	35.1	3000.0	9.000	On	N	9.9	10.9	46.0