

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

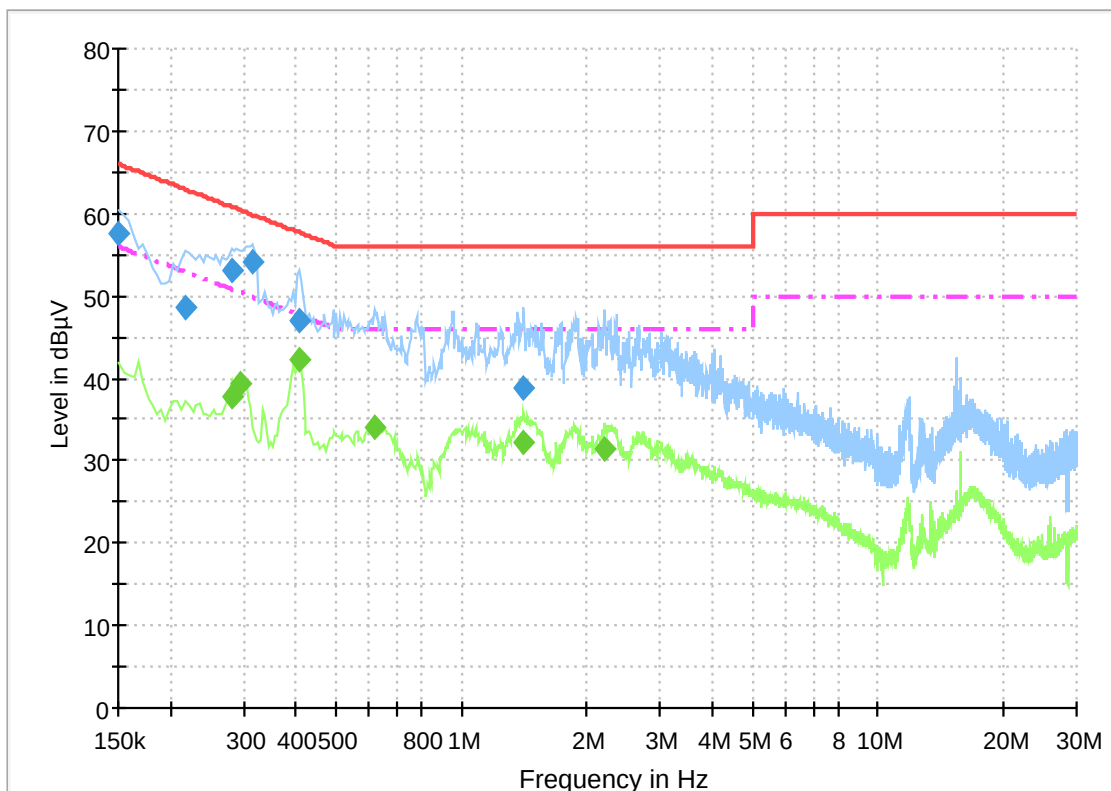

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	57.4	3000.0	9.000	On	N	9.8	8.6	66.0
0.217500	48.6	3000.0	9.000	On	N	9.9	14.3	62.9
0.280500	53.0	3000.0	9.000	On	N	9.8	7.8	60.8
0.316500	54.0	3000.0	9.000	On	N	9.9	5.8	59.8
0.406500	47.1	3000.0	9.000	On	N	10.0	10.6	57.7
1.414500	38.7	3000.0	9.000	On	N	9.9	17.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.280500	37.8	3000.0	9.000	On	N	9.8	13.0	50.8
0.294000	39.3	3000.0	9.000	On	N	9.8	11.2	50.4
0.406500	42.2	3000.0	9.000	On	N	10.0	5.6	47.7
0.618000	34.1	3000.0	9.000	On	N	10.0	11.9	46.0
1.414500	32.2	3000.0	9.000	On	N	9.9	13.8	46.0
2.211000	31.3	3000.0	9.000	On	N	9.8	14.7	46.0