

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

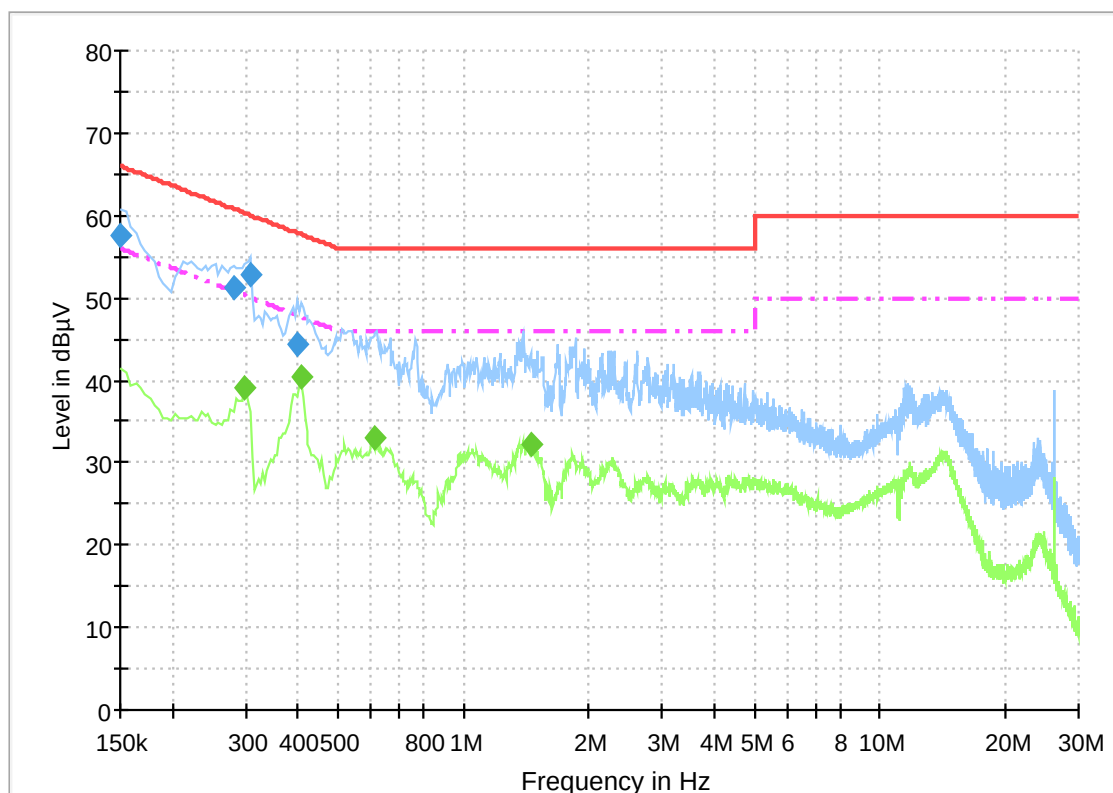

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	57.6	3000.0	9.000	On	L1	9.8	8.4	66.0
0.280500	51.3	3000.0	9.000	On	L1	9.8	9.5	60.8
0.307500	52.9	3000.0	9.000	On	L1	9.8	7.1	60.0
0.397500	44.5	3000.0	9.000	On	L1	10.0	13.4	57.9

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.298500	39.0	3000.0	9.000	On	L1	9.8	11.3	50.3
0.406500	40.5	3000.0	9.000	On	L1	10.0	7.3	47.7
0.613500	32.9	3000.0	9.000	On	L1	10.0	13.1	46.0
1.450500	32.3	3000.0	9.000	On	L1	9.9	13.7	46.0