

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

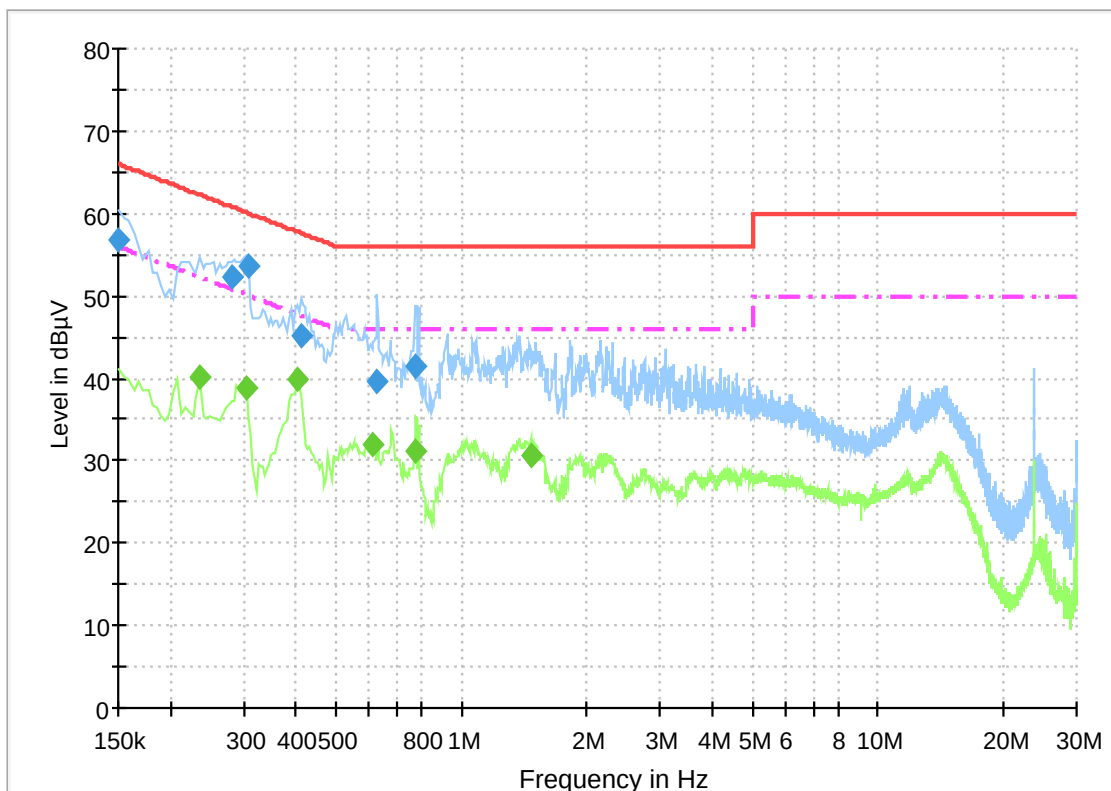

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	56.7	3000.0	9.000	On	N	9.8	9.3	66.0
0.280500	52.3	3000.0	9.000	On	N	9.8	8.5	60.8
0.307500	53.5	3000.0	9.000	On	N	9.8	6.5	60.0
0.411000	45.0	3000.0	9.000	On	N	10.0	12.6	57.6
0.627000	39.6	3000.0	9.000	On	N	10.0	16.4	56.0
0.771000	41.4	3000.0	9.000	On	N	9.9	14.6	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.235500	40.1	3000.0	9.000	On	N	9.8	12.2	52.3
0.303000	38.9	3000.0	9.000	On	N	9.8	11.3	50.2
0.402000	39.8	3000.0	9.000	On	N	10.0	8.0	47.8
0.613500	31.8	3000.0	9.000	On	N	10.0	14.2	46.0
0.775500	31.1	3000.0	9.000	On	N	9.9	14.9	46.0
1.464000	30.5	3000.0	9.000	On	N	9.9	15.5	46.0