

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

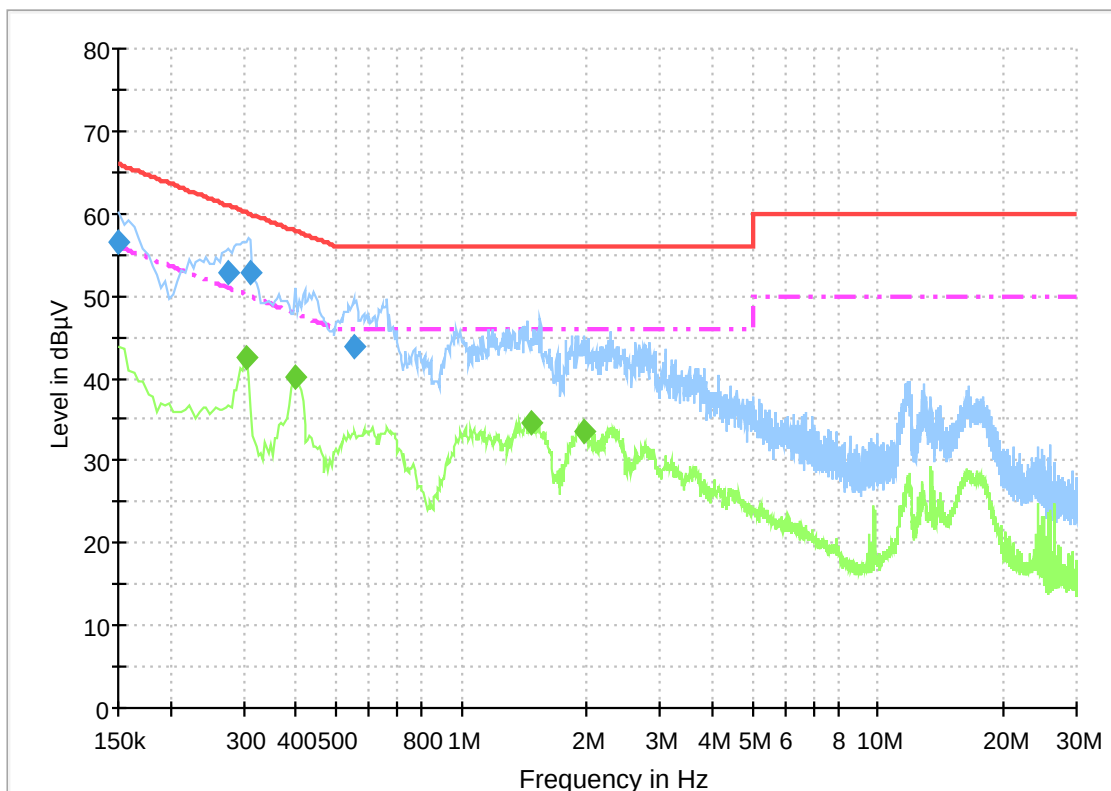

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	56.5	3000.0	9.000	On	L1	9.8	9.5	66.0
0.276000	52.7	3000.0	9.000	On	L1	9.8	8.2	60.9
0.312000	52.8	3000.0	9.000	On	L1	9.9	7.2	59.9
0.550500	43.7	3000.0	9.000	On	L1	10.0	12.3	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	42.6	3000.0	9.000	On	L1	9.8	7.6	50.2
0.397500	40.3	3000.0	9.000	On	L1	10.0	7.6	47.9
1.468500	34.7	3000.0	9.000	On	L1	9.9	11.3	46.0
1.981500	33.5	3000.0	9.000	On	L1	9.8	12.5	46.0