

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

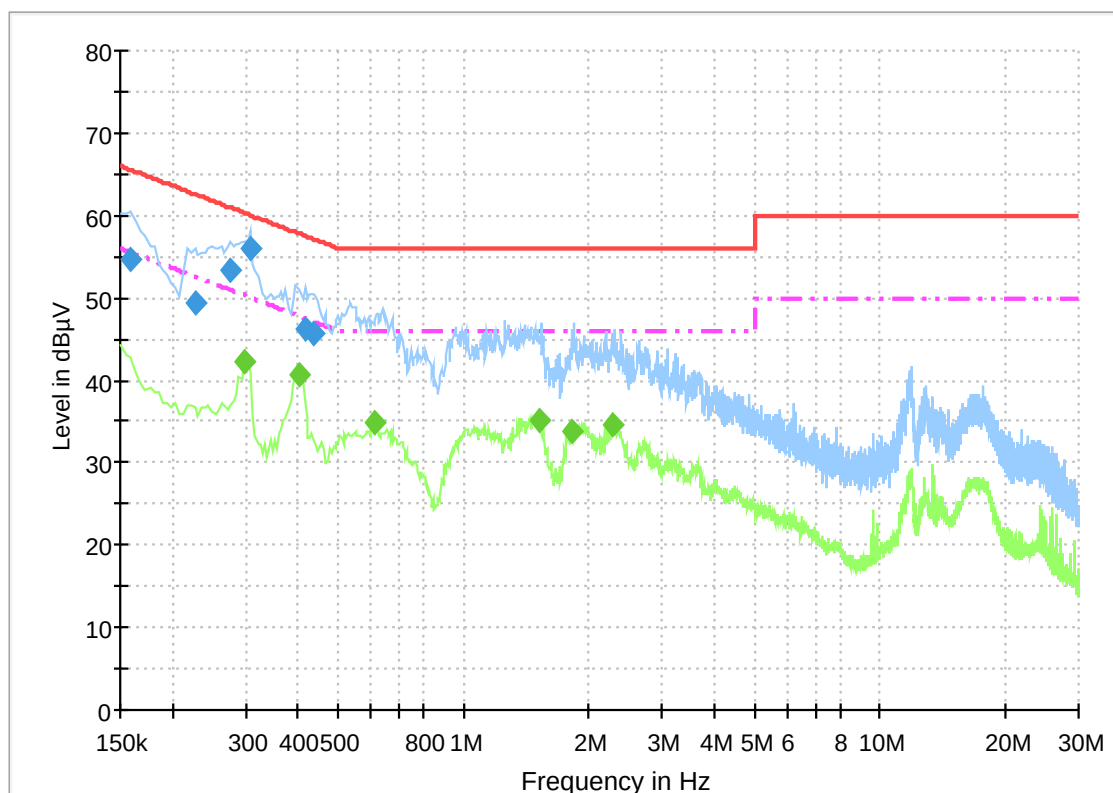

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	54.7	3000.0	9.000	On	N	10.0	10.8	65.5
0.226500	49.4	3000.0	9.000	On	N	9.8	13.2	62.6
0.276000	53.2	3000.0	9.000	On	N	9.8	7.7	60.9
0.307500	56.0	3000.0	9.000	On	N	9.8	4.0	60.0
0.415500	46.2	3000.0	9.000	On	N	10.0	11.4	57.5
0.438000	45.6	3000.0	9.000	On	N	10.0	11.5	57.1

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.298500	42.4	3000.0	9.000	On	N	9.8	7.9	50.3
0.402000	40.6	3000.0	9.000	On	N	10.0	7.2	47.8
0.613500	34.8	3000.0	9.000	On	N	10.0	11.2	46.0
1.518000	35.2	3000.0	9.000	On	N	9.9	10.8	46.0
1.819500	33.7	3000.0	9.000	On	N	9.8	12.3	46.0
2.287500	34.5	3000.0	9.000	On	N	9.8	11.5	46.0