

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

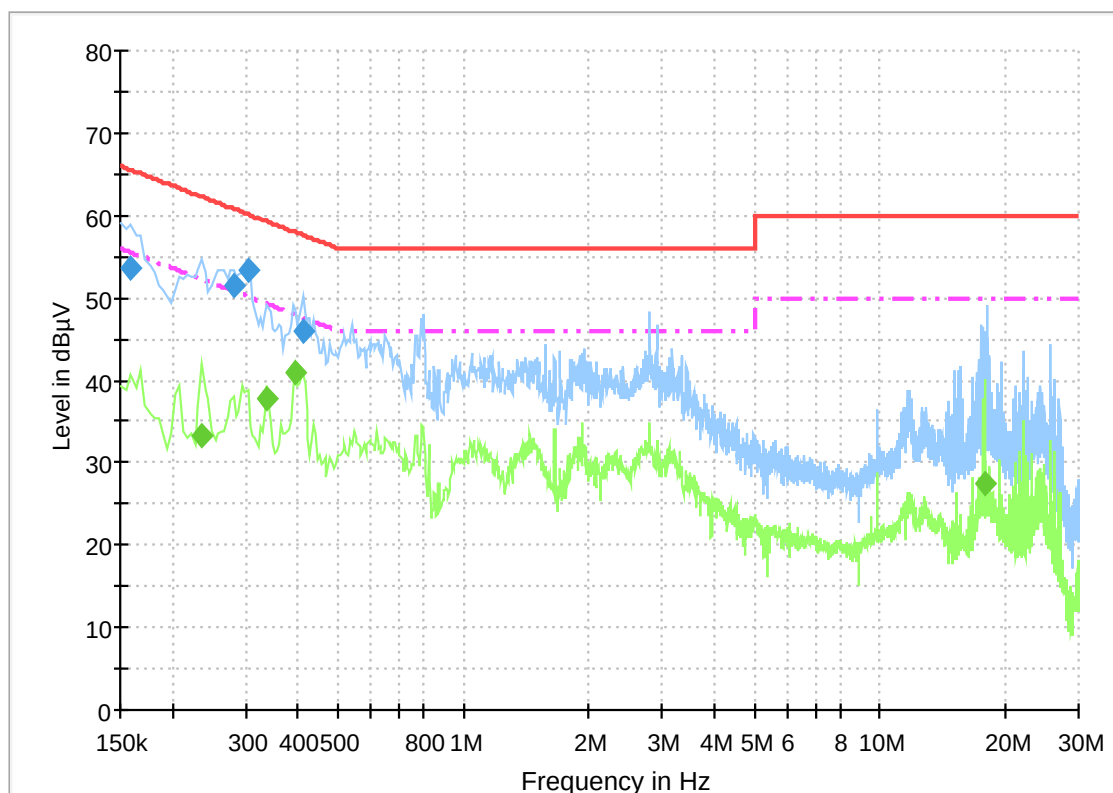

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	53.6	3000.0	9.000	On	L1	10.0	11.9	65.5
0.280500	51.4	3000.0	9.000	On	L1	9.8	9.4	60.8
0.303000	53.3	3000.0	9.000	On	L1	9.8	6.8	60.2
0.411000	45.9	3000.0	9.000	On	L1	10.0	11.7	57.6

Final Result 2

Frequency (MHz)	CAverage (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.235500	33.3	3000.0	9.000	On	L1	9.8	19.0	52.3
0.339000	37.7	3000.0	9.000	On	L1	9.9	11.5	49.2
0.393000	40.8	3000.0	9.000	On	L1	10.0	7.2	48.0
17.952000	27.4	3000.0	9.000	On	L1	10.1	22.6	50.0