

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

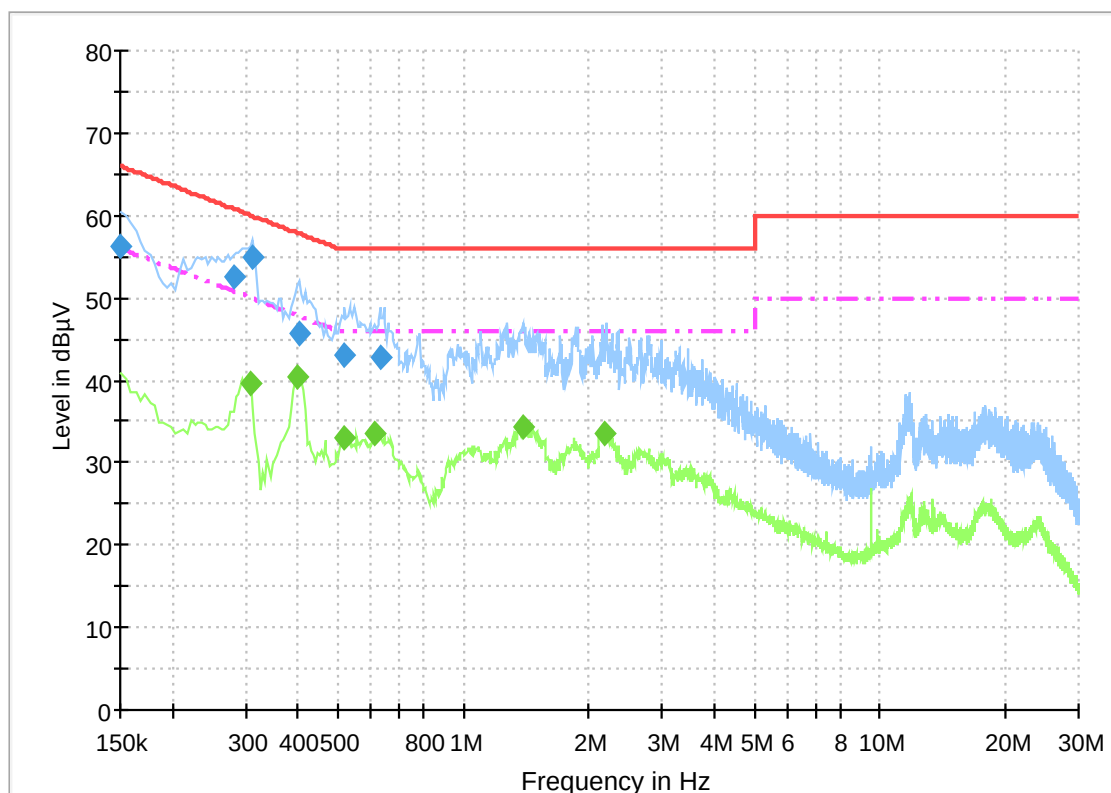

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	56.1	3000.0	9.000	On	N	9.8	9.9	66.0
0.280500	52.6	3000.0	9.000	On	N	9.8	8.2	60.8
0.312000	55.0	3000.0	9.000	On	N	9.9	4.9	59.9
0.402000	45.7	3000.0	9.000	On	N	10.0	12.1	57.8
0.519000	43.0	3000.0	9.000	On	N	10.0	13.0	56.0
0.631500	42.9	3000.0	9.000	On	N	10.0	13.1	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.307500	39.7	3000.0	9.000	On	N	9.8	10.3	50.0
0.397500	40.3	3000.0	9.000	On	N	10.0	7.6	47.9
0.519000	33.0	3000.0	9.000	On	N	10.0	13.0	46.0
0.613500	33.5	3000.0	9.000	On	N	10.0	12.5	46.0
1.387500	34.3	3000.0	9.000	On	N	9.9	11.7	46.0
2.179500	33.5	3000.0	9.000	On	N	9.8	12.5	46.0