

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0

LISN: Correction Table: 3CE Cable Loss
ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_L1

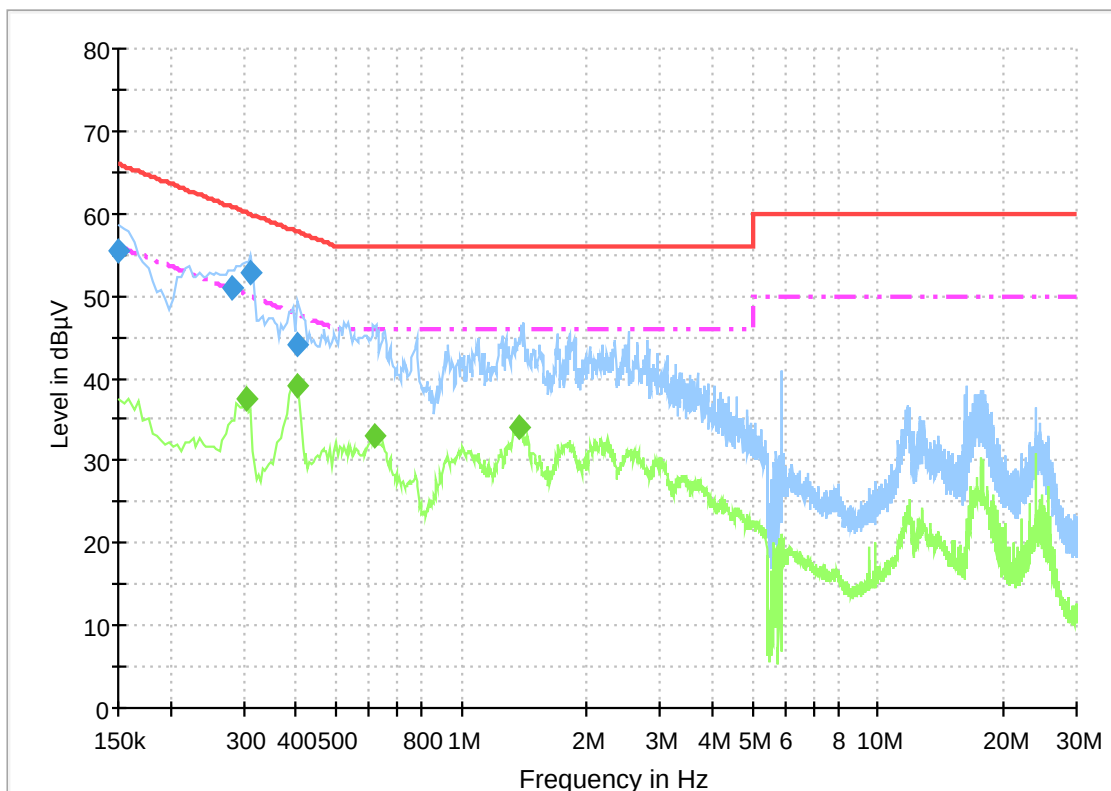

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	55.4	3000.0	9.000	On	L1	9.8	10.6	66.0
0.280500	50.9	3000.0	9.000	On	L1	9.8	9.9	60.8
0.312000	52.8	3000.0	9.000	On	L1	9.9	7.1	59.9
0.402000	44.0	3000.0	9.000	On	L1	10.0	13.8	57.8

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	37.5	3000.0	9.000	On	L1	9.8	12.7	50.2
0.402000	39.0	3000.0	9.000	On	L1	10.0	8.8	47.8
0.618000	33.1	3000.0	9.000	On	L1	10.0	12.9	46.0
1.374000	33.9	3000.0	9.000	On	L1	9.9	12.1	46.0