

Test Report

Common Information

Test Model Name:

Test Mode:

Manufacturer:

Tester:

Hardware Setup: EMI conducted\Voltage with ENV216_FO(101235) - [EMI conducted]

Subrange 1


Frequency Range: 150 kHz - 30 MHz

Receiver: ESCI 3 [ESCI 3]
@ GPIB0 (ADR 20), SN 100032/003, FW 4.42

Signal Path: ESCI 3-ENV216 FO(101235)
FW 1.0
Correction Table: 3CE Cable Loss

LISN: ENV216 FO(101235)
Correction Table (Line 0): ENV216_FO_N(101235)
Correction Table (Line 1): ENV216_FO_L1(101235)

3CE_Class B_N

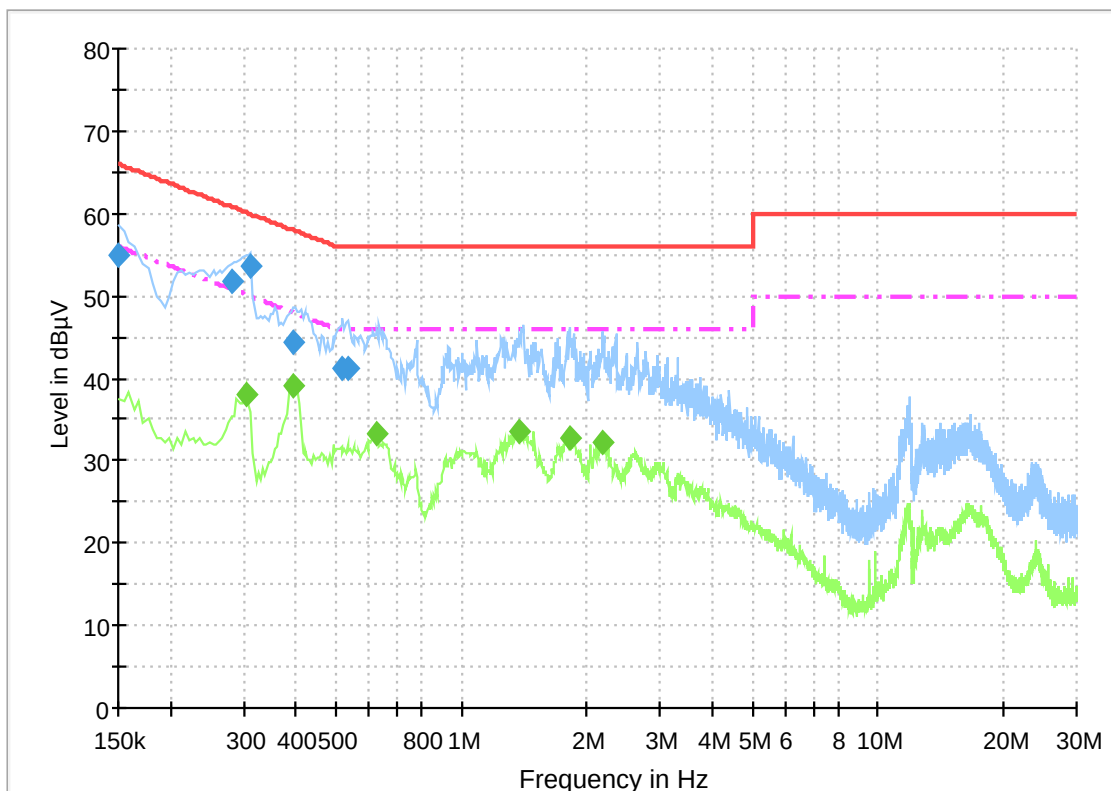

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	55.0	3000.0	9.000	On	N	9.8	11.0	66.0
0.280500	51.6	3000.0	9.000	On	N	9.8	9.2	60.8
0.312000	53.5	3000.0	9.000	On	N	9.9	6.4	59.9
0.393000	44.3	3000.0	9.000	On	N	10.0	13.7	58.0
0.519000	41.1	3000.0	9.000	On	N	10.0	14.9	56.0
0.537000	41.2	3000.0	9.000	On	N	10.0	14.8	56.0

Final Result 2

Frequency (MHz)	CAverage (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.303000	38.1	3000.0	9.000	On	N	9.8	12.0	50.2
0.393000	39.2	3000.0	9.000	On	N	10.0	8.8	48.0
0.622500	33.2	3000.0	9.000	On	N	10.0	12.8	46.0
1.374000	33.6	3000.0	9.000	On	N	9.9	12.4	46.0
1.815000	32.7	3000.0	9.000	On	N	9.8	13.3	46.0
2.175000	32.3	3000.0	9.000	On	N	9.8	13.7	46.0