
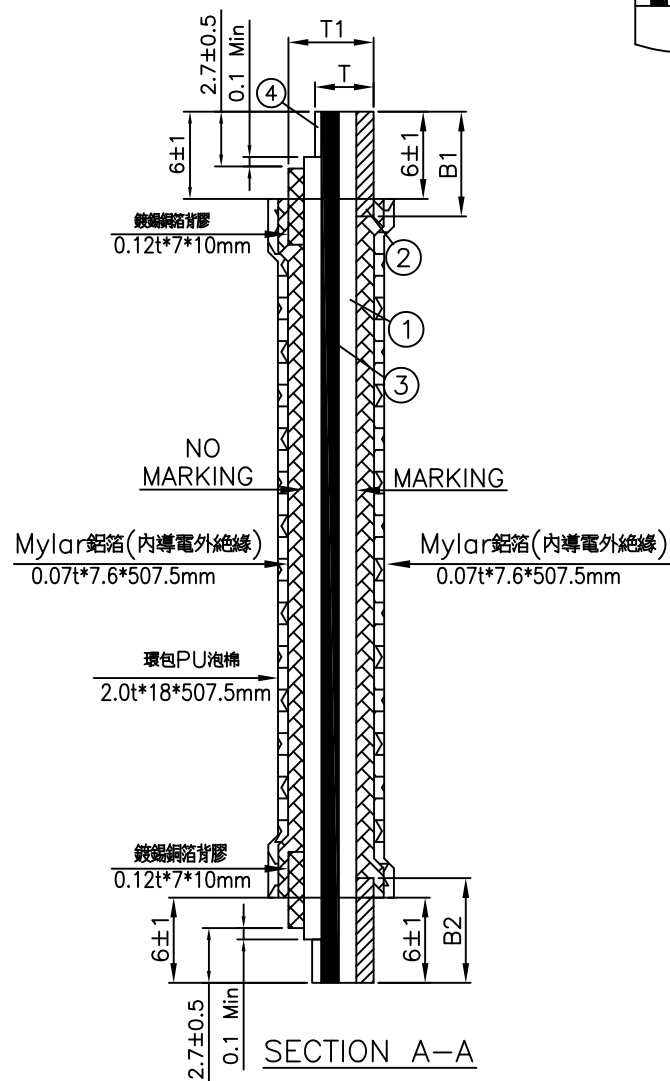
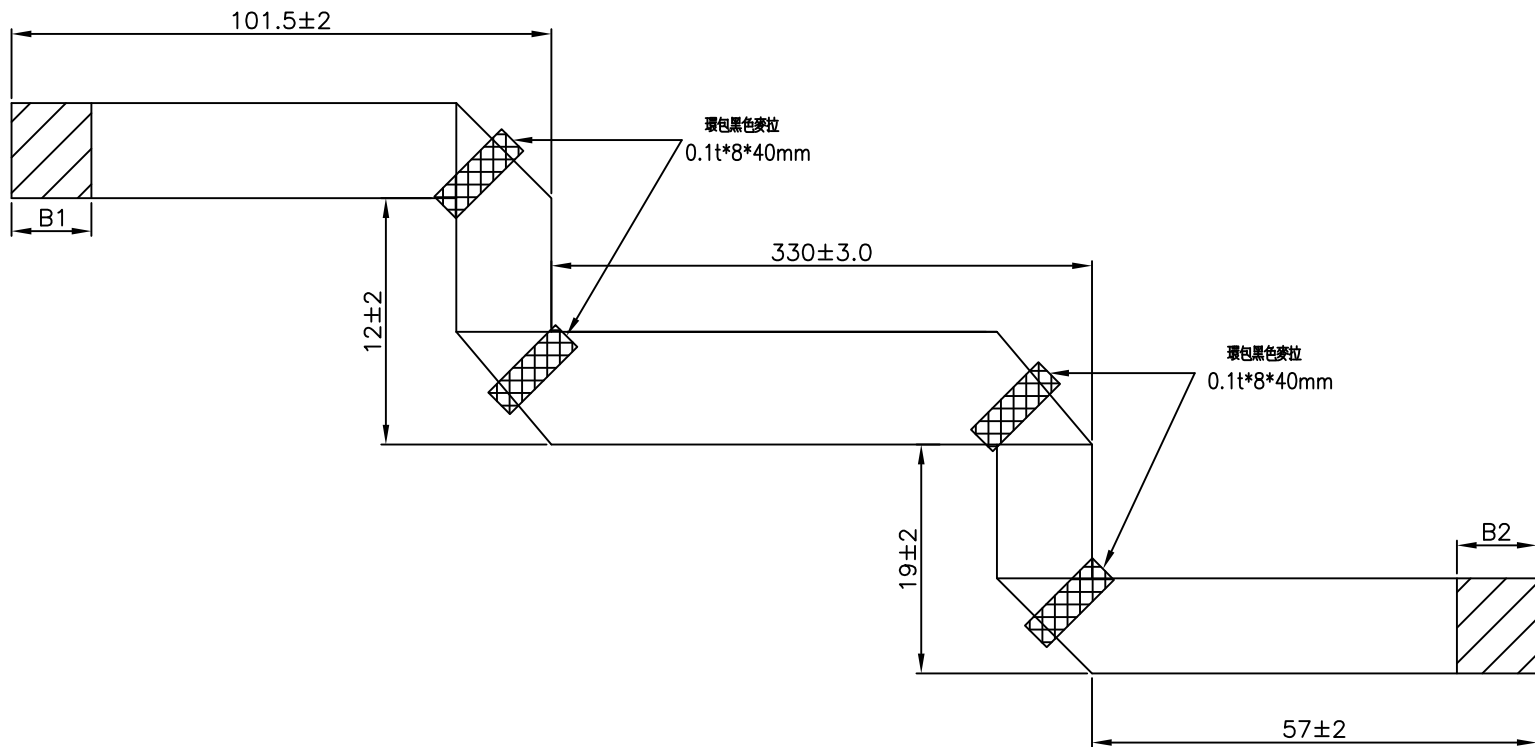


3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		

NOTES:

1. 成品S1&S2端鍍錫銅箔需導通
2. ☒為重點管控尺寸
3. Impedance Spec: $50 \pm 15 \Omega$

CUSTOMER DRAWING						P-TWO INDUSTRIES INC.						
						UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.25 X.XX ±0.15 X.XXX ANG. ±0°30'	APPROVED BY	DATE	TITLE FFC 0.5P			
							CHECKED BY	DATE				
							DRAWN BY	DATE	DOCUMENT NO	PAGE		
									JB83-01XXX	XX		
SER	AREA	DESCRIPTION	CHK	DATE	UNIT		SIZE	DRAWING NO		REV	SHEET	SCALE
6			7		mm		A4	183005-15084		X1	1/2	XX
						8	9		0			

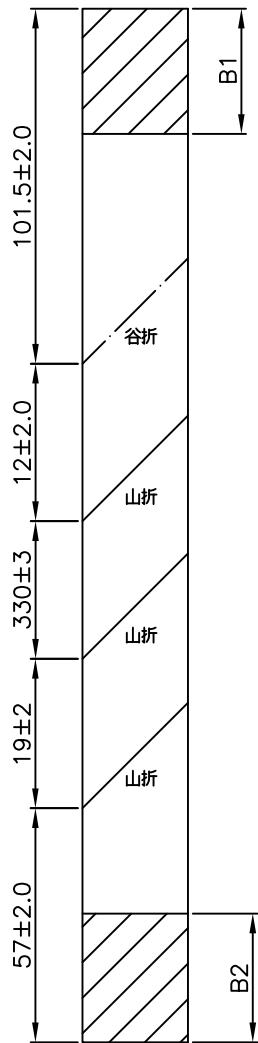

CUSTOMER DARWING



P-TWO INDUSTRIES INC.

SER	AREA	DESCRIPTION	CHK	DATE

UNLESS OTHERWISE SPECIFIED	
TOLERANCES ARE	
X.X	± 0.25
X.XX	± 0.15
X.XXX	± 0.10
ANG.	$\pm 0'30''$
UNIT	mm

APPROVED BY	DATE	TITLE	
CHECKED BY	DATE		
DRAWN BY	DATE	DOCUMENT NO	PAGE
		JB83-01XXX	XX
DRAWING NO	REV	SHEET	SCALE
183005-15084	X1	2/2	XX