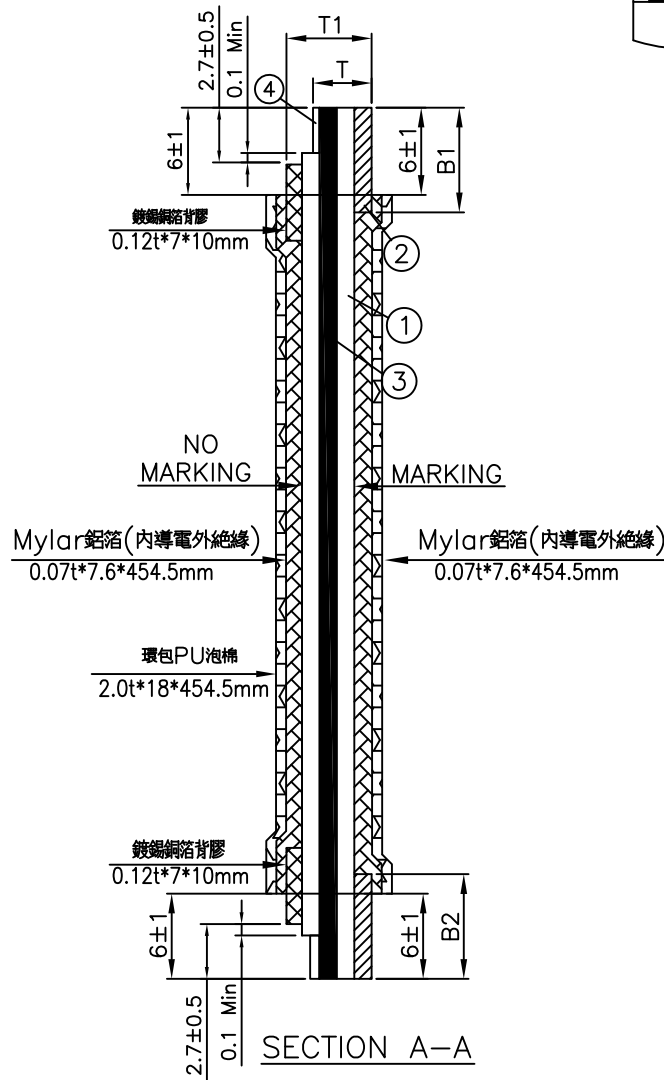
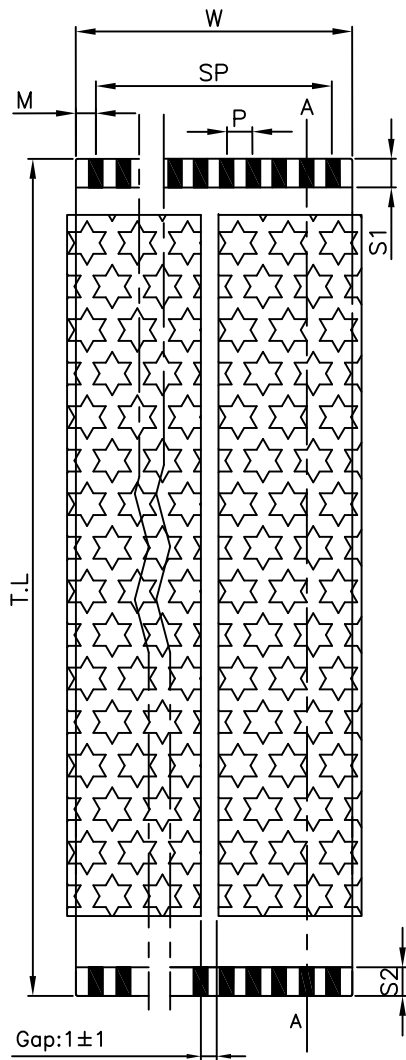


STRUCTURE			
NO	ITEM NAME	SPECIFICATION	REMARK
1	INSULATION	PET(UL20861)	105°C.60V
2	P/TAPE	PET	

3	CONDUCTOR (Bare copper)	THICKNESS	0.035	±0.01
		WIDTH	0.3	±0.03
4	CONDUCTOR	PLATED	Ni(40u")	MIN
		PLATED	GOLD(3u")	MIN
		SAND BLASTING		

DIMENSION			
PITCH	P	0.5	±0.05
SPAN	SP	7.0	±0.05
WIDTH	W	8.0	±0.1
MARGIN	☒ M	0.5	±0.1
INSERT THICKNESS	☒ T	0.3	±0.05
	☒ T1	0.5	±0.05
PROTECTOR LENGTH	☒ B1	7.0	±1.0
	☒ B2	7.0	±1.0
STRIP LENGTH	☒ S1	2.2	±0.5
	☒ S2	2.2	±0.5
TOTAL LENGTH	T.L	466.5	±3.0
NO of PIN	15P		

NOTES:

1.成品S1&S2端鍍錫銅箔需導通

2. ☒ 為重點管控尺寸

3.Impedance Spec:50±15Ω

CUSTOMER DRAWING



P-TWO INDUSTRIES INC.

					UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X.X ±0.25 X.XX ±0.15 X.XXX ANG. ±0°30'	APPROVED BY		DATE		TITLE FFC 0.5P		
						CHECKED BY		DATE				
						DRAWN BY		DATE				
										DOCUMENT NO JB83-01XXX		PAGE XX
SER	AREA	DESCRIPTION	CHK	DATE		UNIT mm		SIZE A4	DRAWING NO 183005-15085		REV X1	SHEET 1/2

