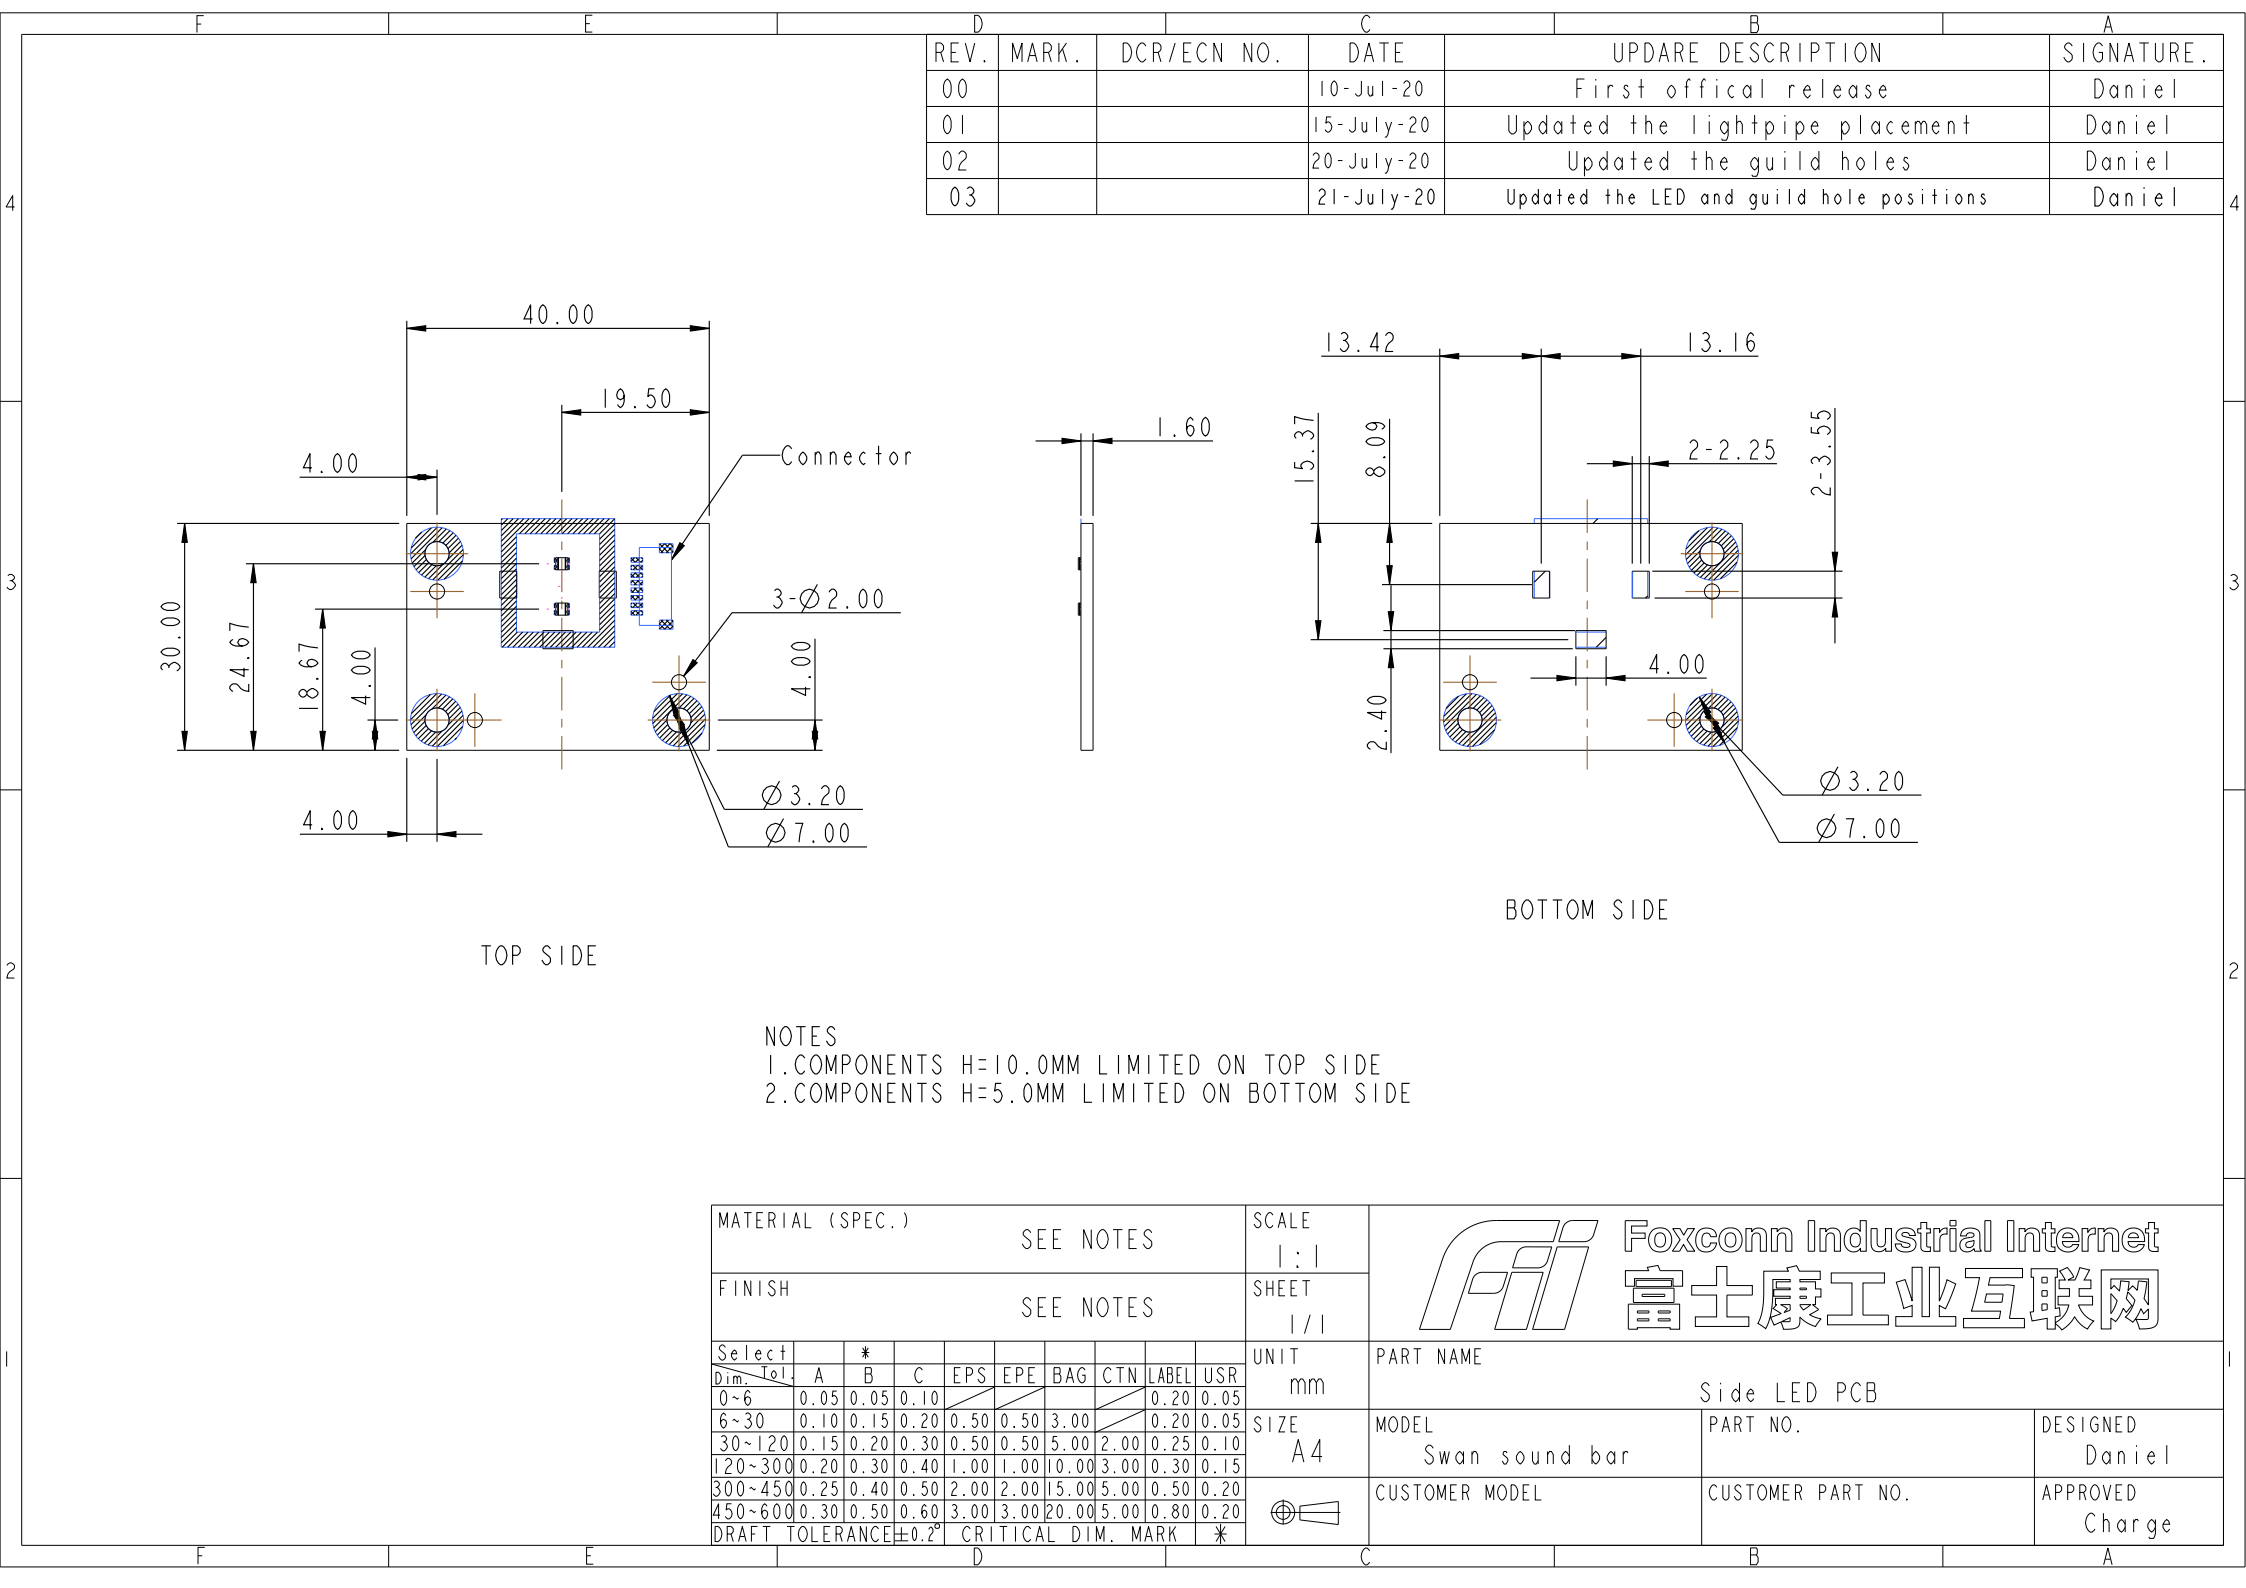
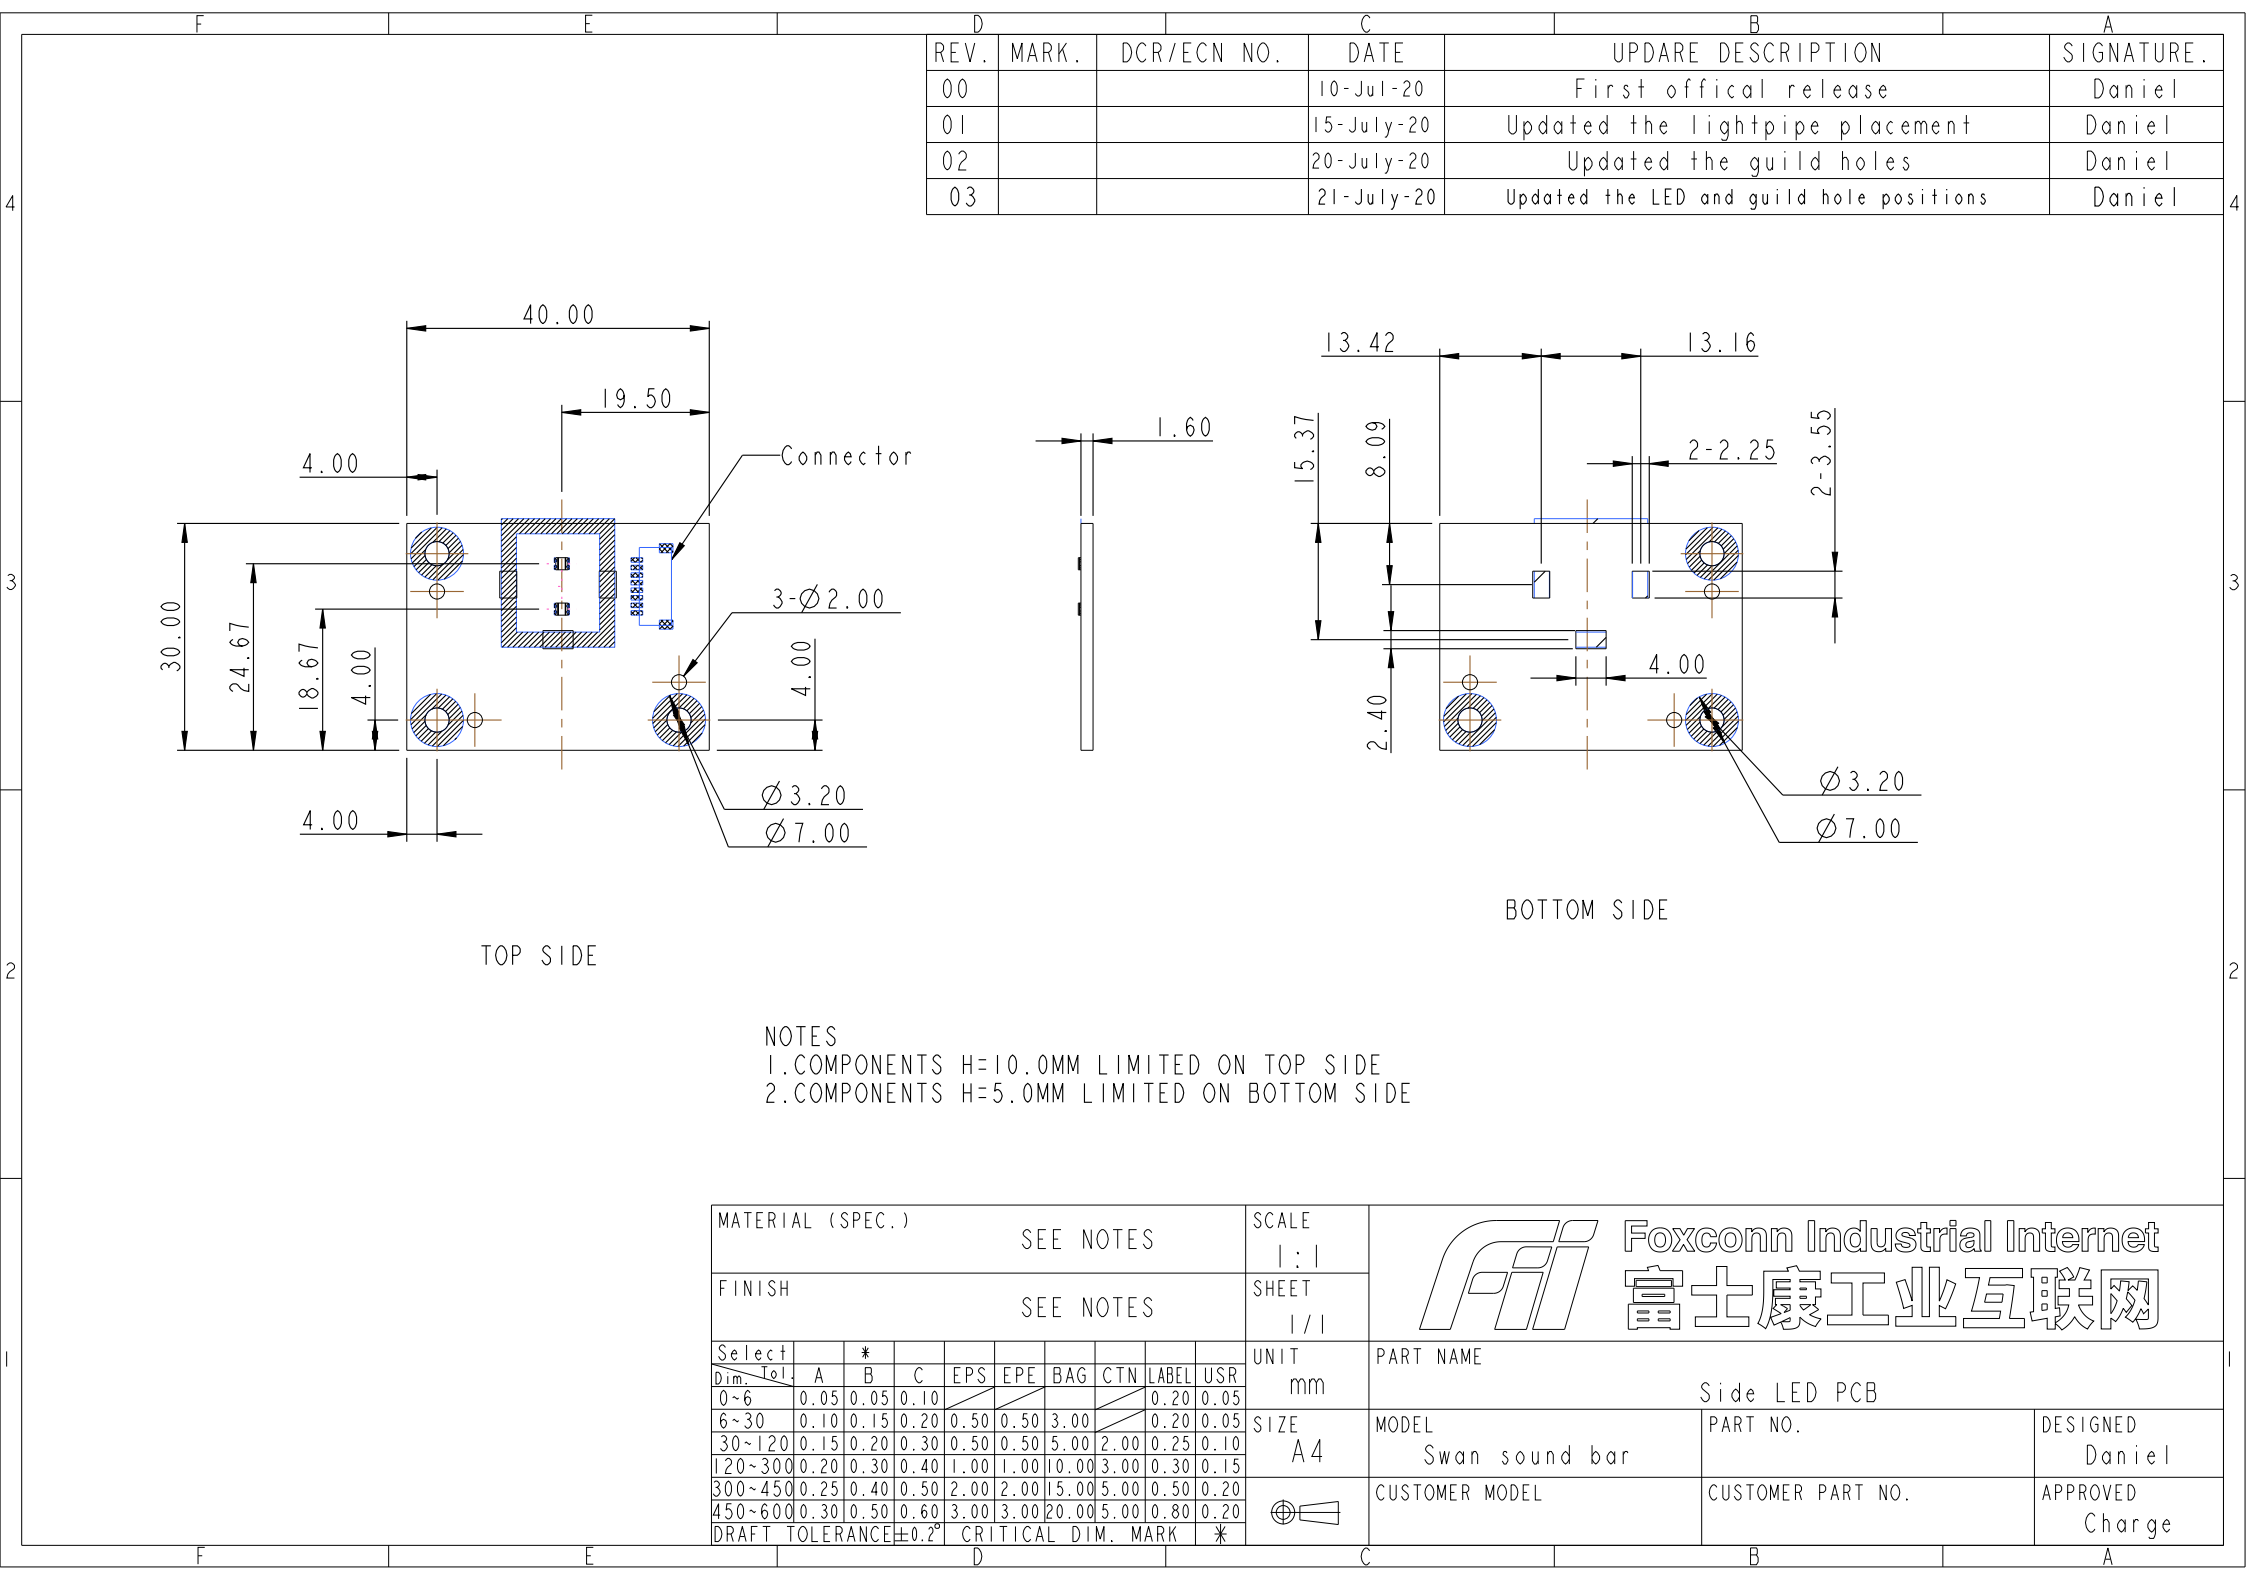


[illegible][illegible]

REV.	MARK.	DCR/ECN NO.	DATE	UPDARE DESCRIPTION	SIGNATURE.
00			10-Jul-20	First offical release	Daniel
01			15-July-20	Updated the lightpipe placement	Daniel
02			20-July-20	Updated the guild holes	Daniel
03			21-July-20	Updated the LED and guild hole positions	Daniel

TOP SIDE

BOTTOM SIDE

NOTES

- 1.COMPONENTS H=10.0MM LIMITED ON TOP SIDE
- 2.COMPONENTS H=5.0MM LIMITED ON BOTTOM SIDE

MATERIAL (SPEC.)									
SEE NOTES									
FINISH									
SEE NOTES									
Select		*							
Dim. Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR
0~6	0.05	0.05	0.10	/	/	/	/	0.20	0.05
6~30	0.10	0.15	0.20	0.50	0.50	3.00	/	0.20	0.05
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *									

SCALE
1:1

SHEET
1/1

UNIT
mm

SIZE
A4

Foxconn Industrial Internet
富士康工业互联网

PART NAME		
Side LED PCB		
MODEL Swan sound bar	PART NO.	DESIGNED Daniel
CUSTOMER MODEL	CUSTOMER PART NO.	APPROVED Charge

[illegible]

	F	E	D	C	B	A
REV.	MARK.	DCR/ECN NO.	DATE	UPDARE DESCRIPTION		SIGNATURE.
00			10-Jul-20	First offical release		Daniel
01			15-July-20	Updated the lightpipe placement		Daniel
02			20-July-20	Updated the guild holes		Daniel
03			21-July-20	Updated the LED and guild hole positions		Daniel

I
2
3
4

The technical drawing shows two views of a rectangular PCB component:

- TOP SIDE:** A rectangle measuring 40.00 by 30.00 mm. It features four circular mounting holes at the corners with diameters labeled as Ø 3.20 and Ø 7.00. In the upper-left corner, there are three small circles arranged horizontally, collectively labeled as "Connector". Other dimensions include 19.50, 4.00, 24.67, and 18.67 mm.
- BOTTOM SIDE:** Shows internal components like LEDs or resistors. Dimensions include horizontal spacings of 13.42 and 13.16 mm, vertical distances of 15.37, 8.09, and 2.40 mm, and various widths such as 2-2.25, 4.00, 2-3.55, and 1.60 mm. Circular features are also dimensioned with Ø 3.20 and Ø 7.00.

NOTES

- 1.COMPONENTS H=10.0MM LIMITED ON TOP SIDE
- 2.COMPONENTS H=5.0MM LIMITED ON BOTTOM SIDE

MATERIAL (SPEC.)	SEE NOTES										SCALE	Foxconn Industrial Internet 富士康工业互联网
FINISH	SEE NOTES										SHEET	
Select Dim Tol	*	*A	*B	*C	EPS	EPE	BAG	CTN	LABEL	USR	UNIT	
0~6	0.05	0.05	0.10	/	/	/	/	/	0.20	0.05	mm	
6~30	0.10	0.15	0.20	0.50	0.50	3.00	/	/	0.20	0.05	SIZE	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10		A4	
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15			
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20			
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20			
DRAFT TOLERANCE ±0.2° CRITICAL DIM. MARK *											⌀	

PART NAME Side LED PCB	
MODEL Swan sound bar	PART NO.
CUSTOMER MODEL	CUSTOMER PART NO.
DESIGNED Daniel	
APPROVED Charge	

I
2
3
4

[illegible]

	F	E	D	C	B	A				
				REV.	MARK.	DCR/ECN NO.	DATE	UPDARE DESCRIPTION		SIGNATURE.
				00			10-Jul-20	First offical release		Daniel
				01			15-July-20	Updated the lightpipe placement		Daniel
				02			20-July-20	Updated the guild holes		Daniel
				03			21-July-20	Updated the LED and guild hole positions		Daniel

4

3

2

I

TOP SIDE

BOTTOM SIDE

NOTES
1.COMPONENTS H=10.0MM LIMITED ON TOP SIDE
2.COMPONENTS H=5.0MM LIMITED ON BOTTOM SIDE

MATERIAL (SPEC.)		SEE NOTES		SCALE 1 : 1		 Foxconn Industrial Internet 富士康工业互联网					
FINISH		SEE NOTES		SHEET 1 / 1							
Select		*						UNIT mm		PART NAME	
Dim Tol	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	Side LED PCB	
0~6	0.05	0.05	0.10					0.20	0.05	MODEL Swan sound bar	
6~30	0.10	0.15	0.20	0.50	0.50	3.00		0.20	0.05	PART NO.	
30~120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10	DESIGNED Daniel	
120~300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15	APPROVED Charge	
300~450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20		
450~600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20		
DRAFT TOLERANCE ±0.2°				CRITICAL DIM. MARK *							

F

E

D

C

B

A