
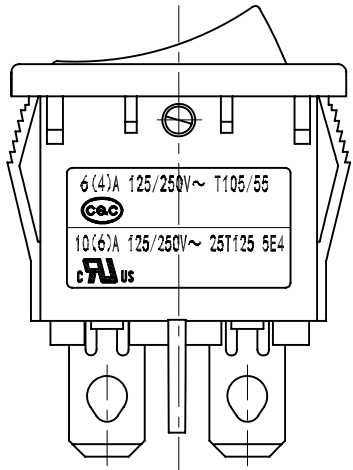
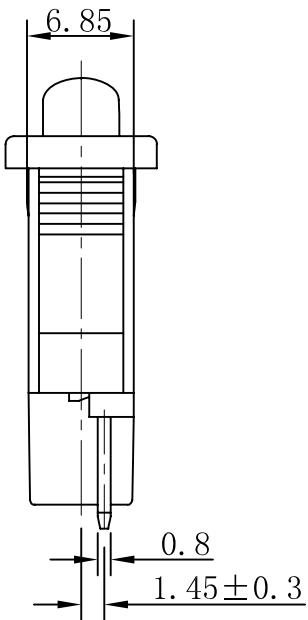
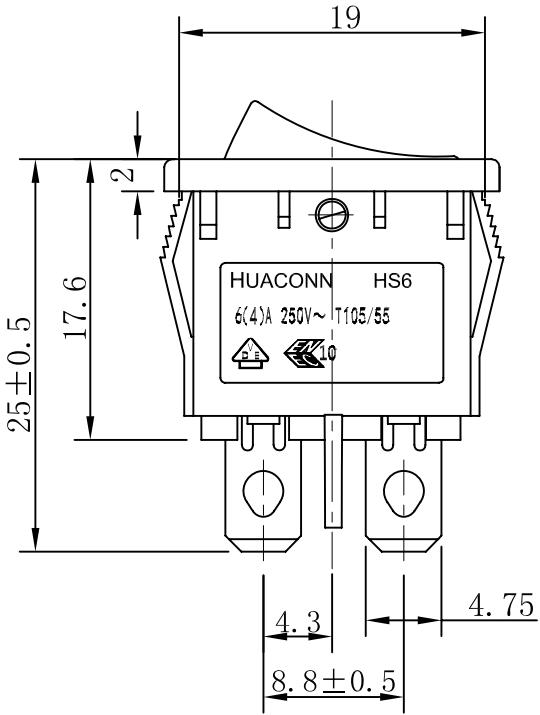




REVISED	DESCRIPTION	APPROVED	DATE
A0	First release	HUANG	2019.03.02
A1	Update the mark of switch	HUANG	2019.11.28

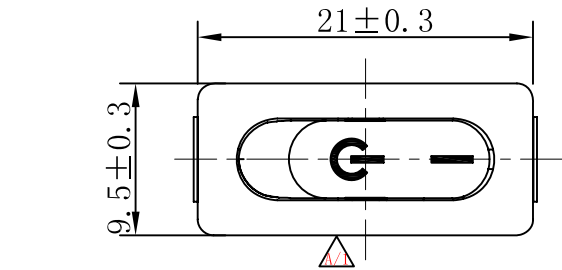

■ Technical requirements

- 1.Rating:
CQC:6(4)A 125/ 250V~
VDE ENEC:6(4)A 250V~
UL cUL: 10(6)A 125/ 250V~
2. Operating force:650±350gf
3. Contact resistance: ≤50mΩ min
4. Electrical life :≥10000cycles
5. Withstanding Voltage:between all terminals:
1500V AC(50-60Hz)5s
Terminals to Button:
3000V AC(50-60Hz)5s
Leakage Current:5mA
Insulation resistance:≥100MΩ 500V DC
6.Environmental temperature:-25℃~+85℃

PANEL OUT-OUT

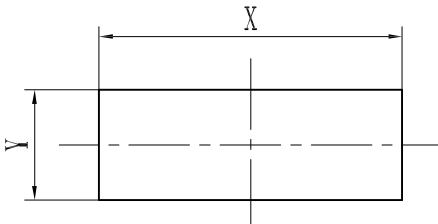

PANEL THICKNESS	DIM.X	DIM.Y
0.75~1.25	19.0~19.2	6.95
1.25~2.0	19.3~19.5	6.95
2.0~3.0	19.6~19.8	6.95

APPROVED	JACK	2019.03.02	CUSTOMER NUMBER:	HS66	BAOYUANDA ELECTRONICS CO., LTD
EXAMINE	DRUN	2019.03.02	TOLERANCE	TITLE:	Baoyuanda
CHECKED	XIONG	2019.03.02	Length Angle	SWITCH	
DRAWING	HUANG	2019.03.02	PAGE	1/1	UNIT: mm
			ITEM NUMBER	4-HT0-710-XXX-XXX	REV A/1