



A2dpDeviceService Scenario for BFX-UA300

by ALT (20211019)

1. First booting procedure

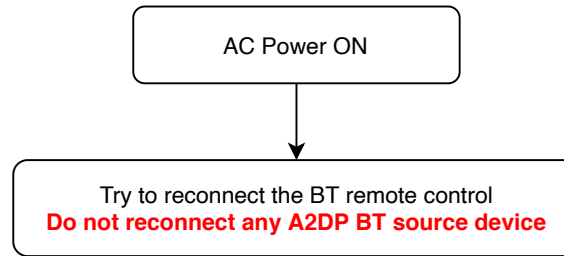


2. Press Front BT Button

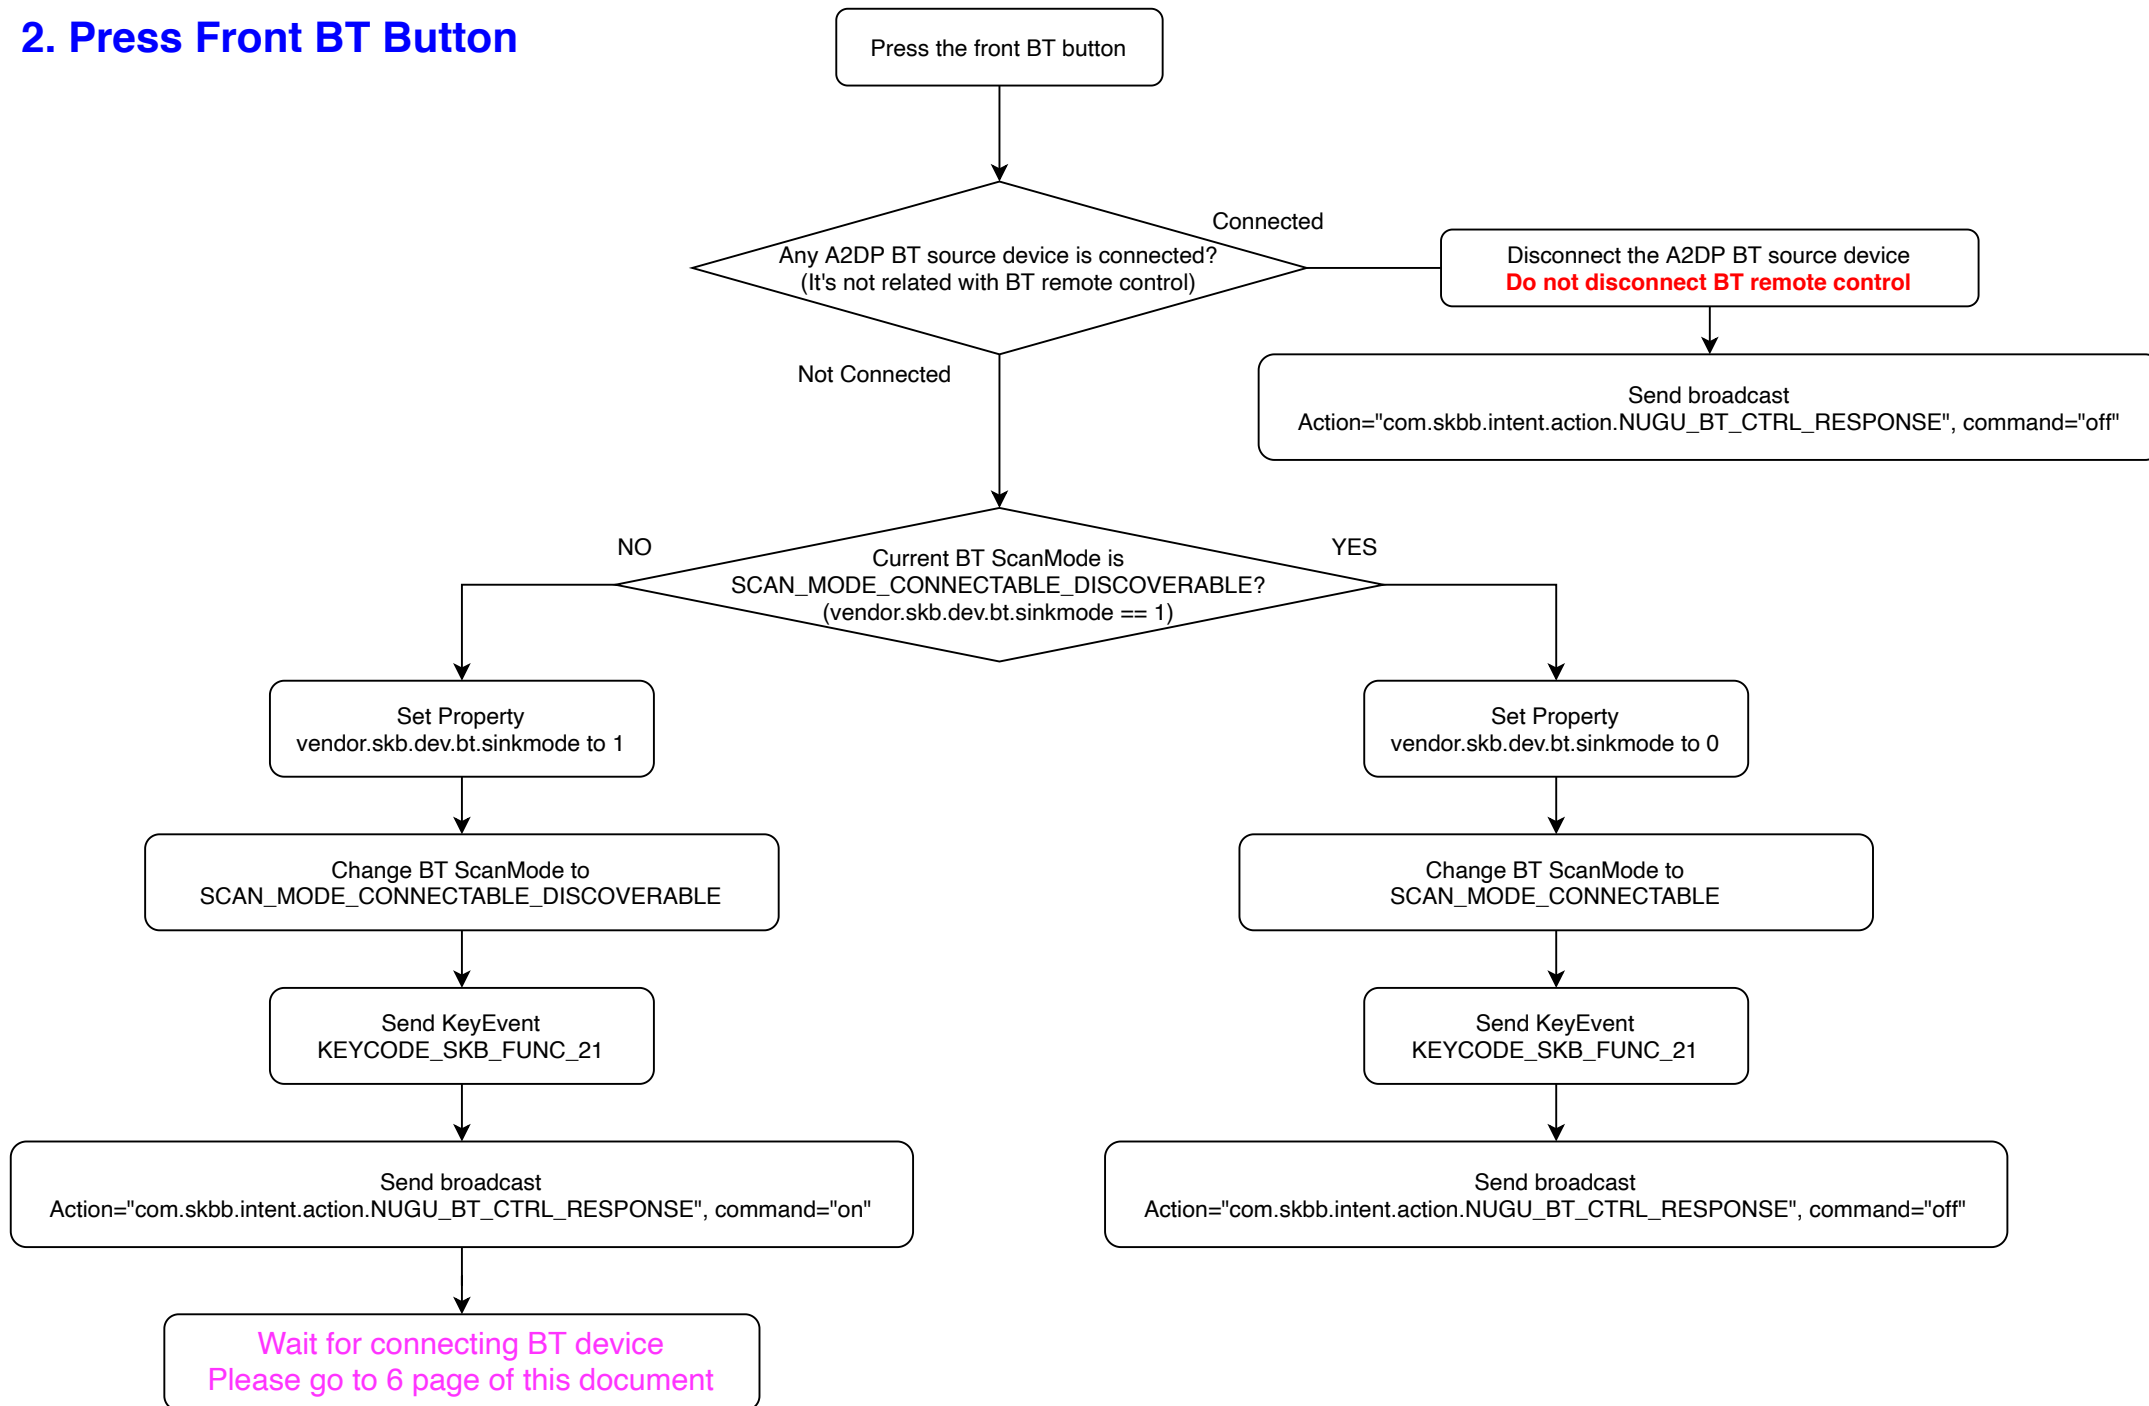


3. Receive Broadcast Action="com.skbb.intent.action.NUGU_BT_CTRL_RESPONSE"

3.1 If the command of Broadcast is "off"

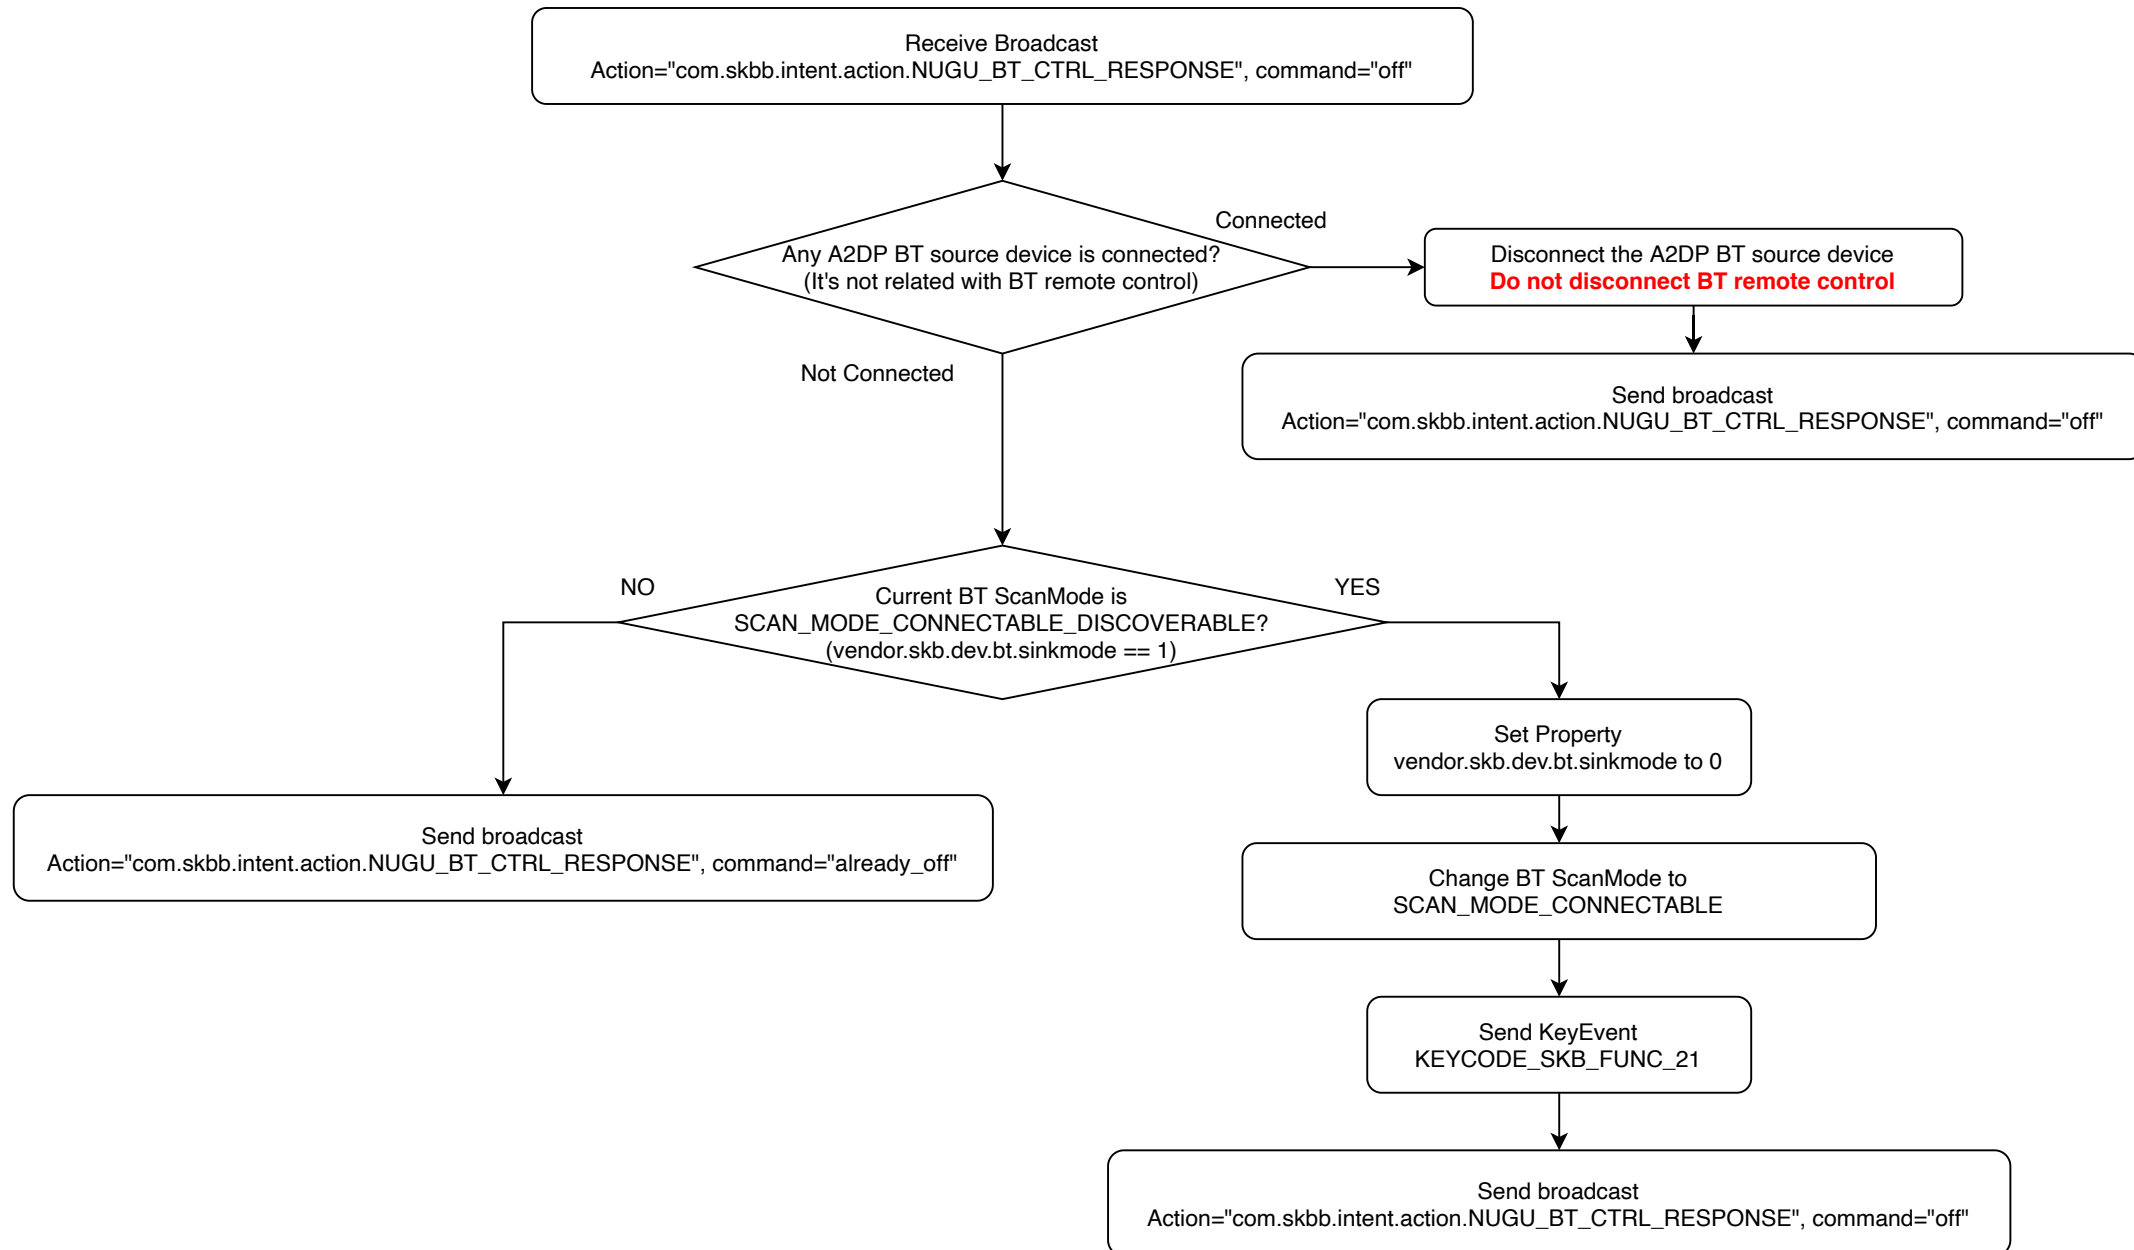

3. Receive Broadcast Action="com.skbb.intent.action.NUGU_BT_CTRL_RESPONSE"

3.2 If the command of Broadcast is "on"

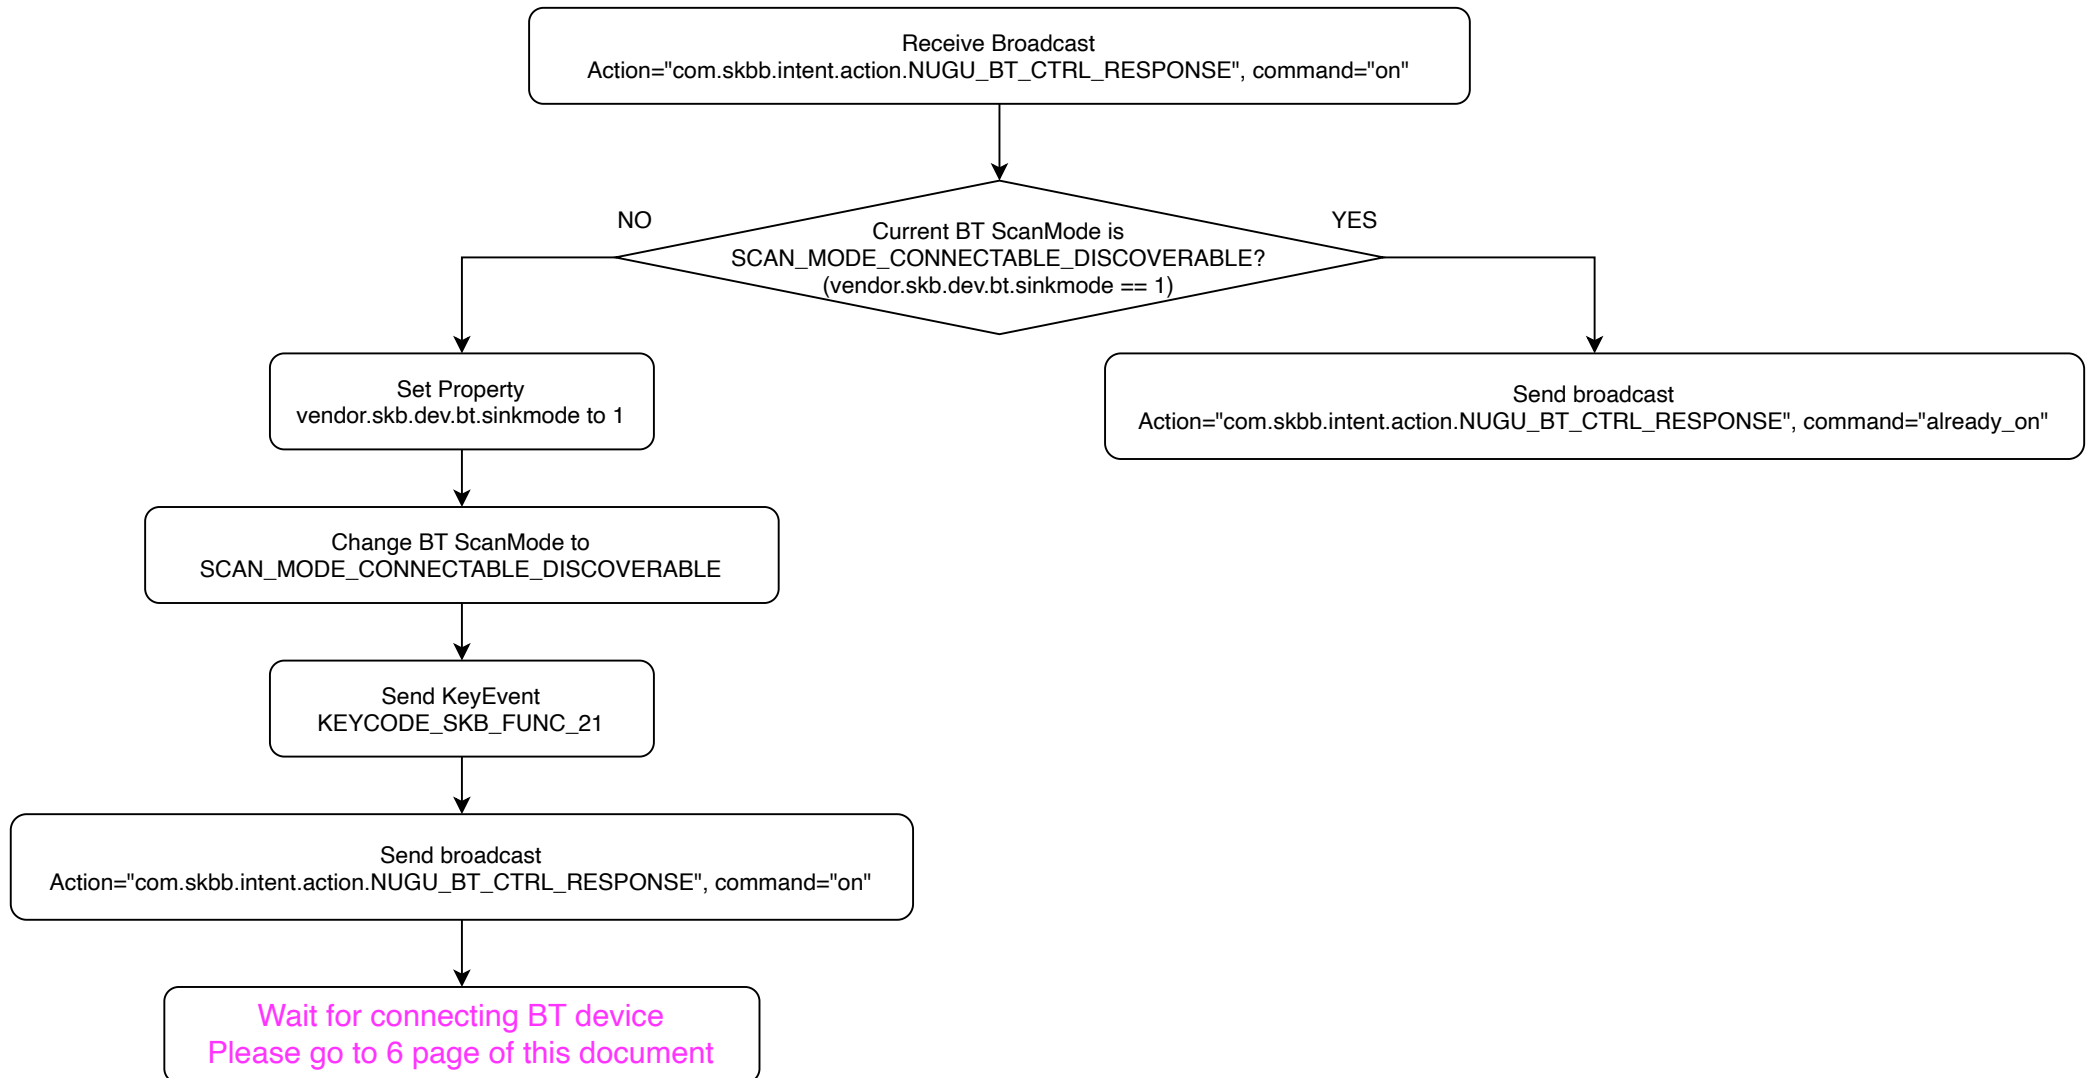


4. When the STB connect with other Speaker(Source mode)

I don't think there is any special process when the STB connect with other Speaker.

When the 1,2,3,5 scenario complete to implement, I will test when the STB connect with other Speaker, and there is any problem or not.

5. Waiting for connecting BT device

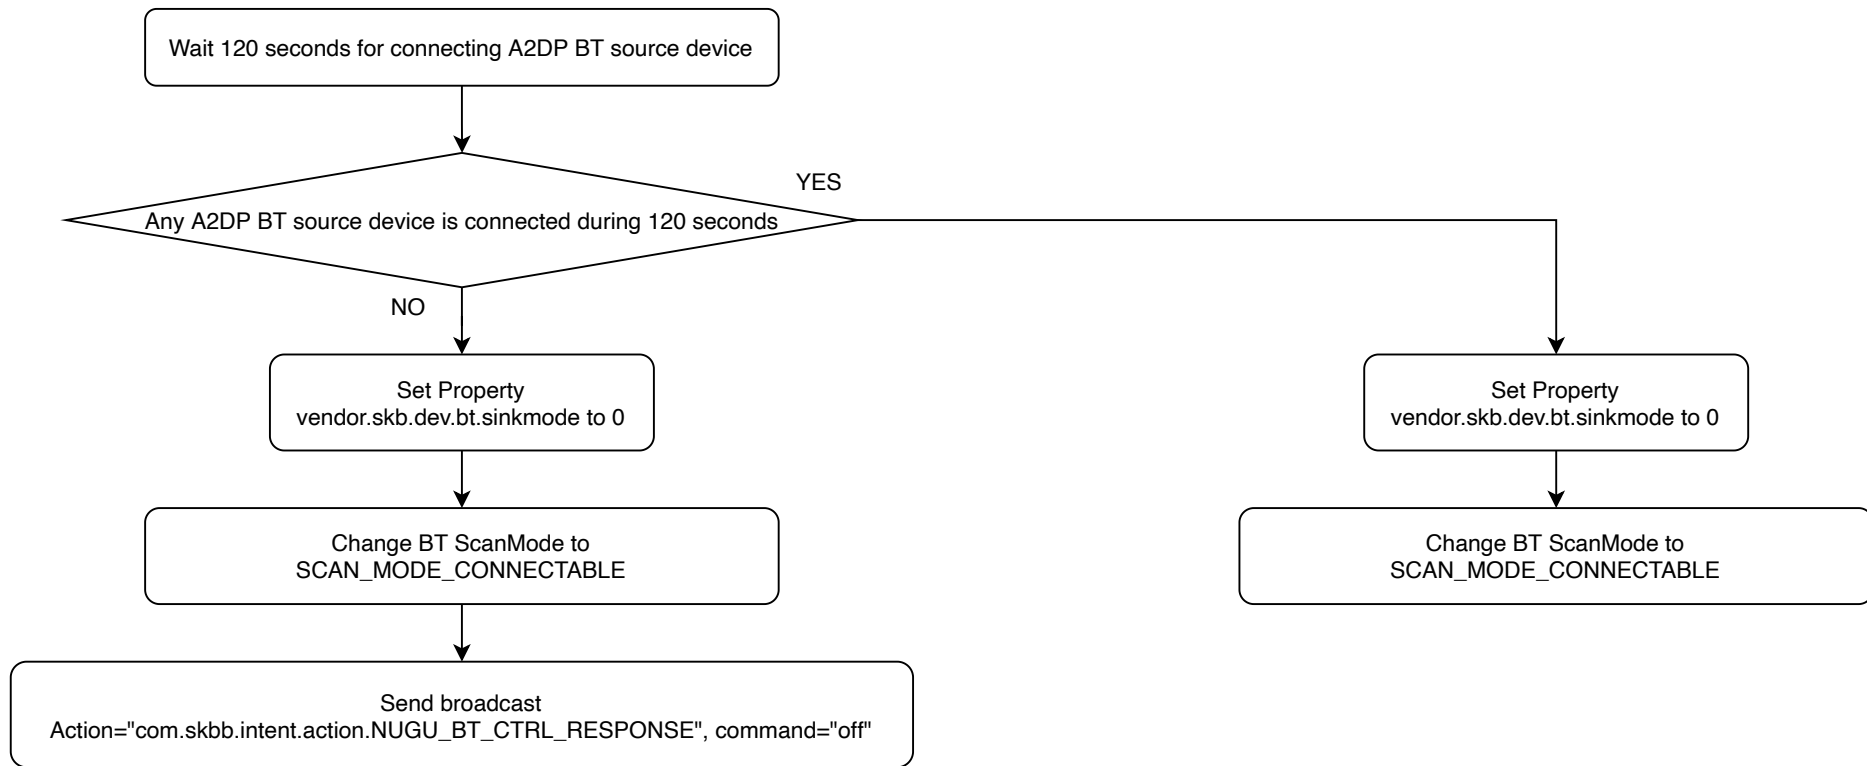

6. Connect/Disconnect from A2DP source device

