


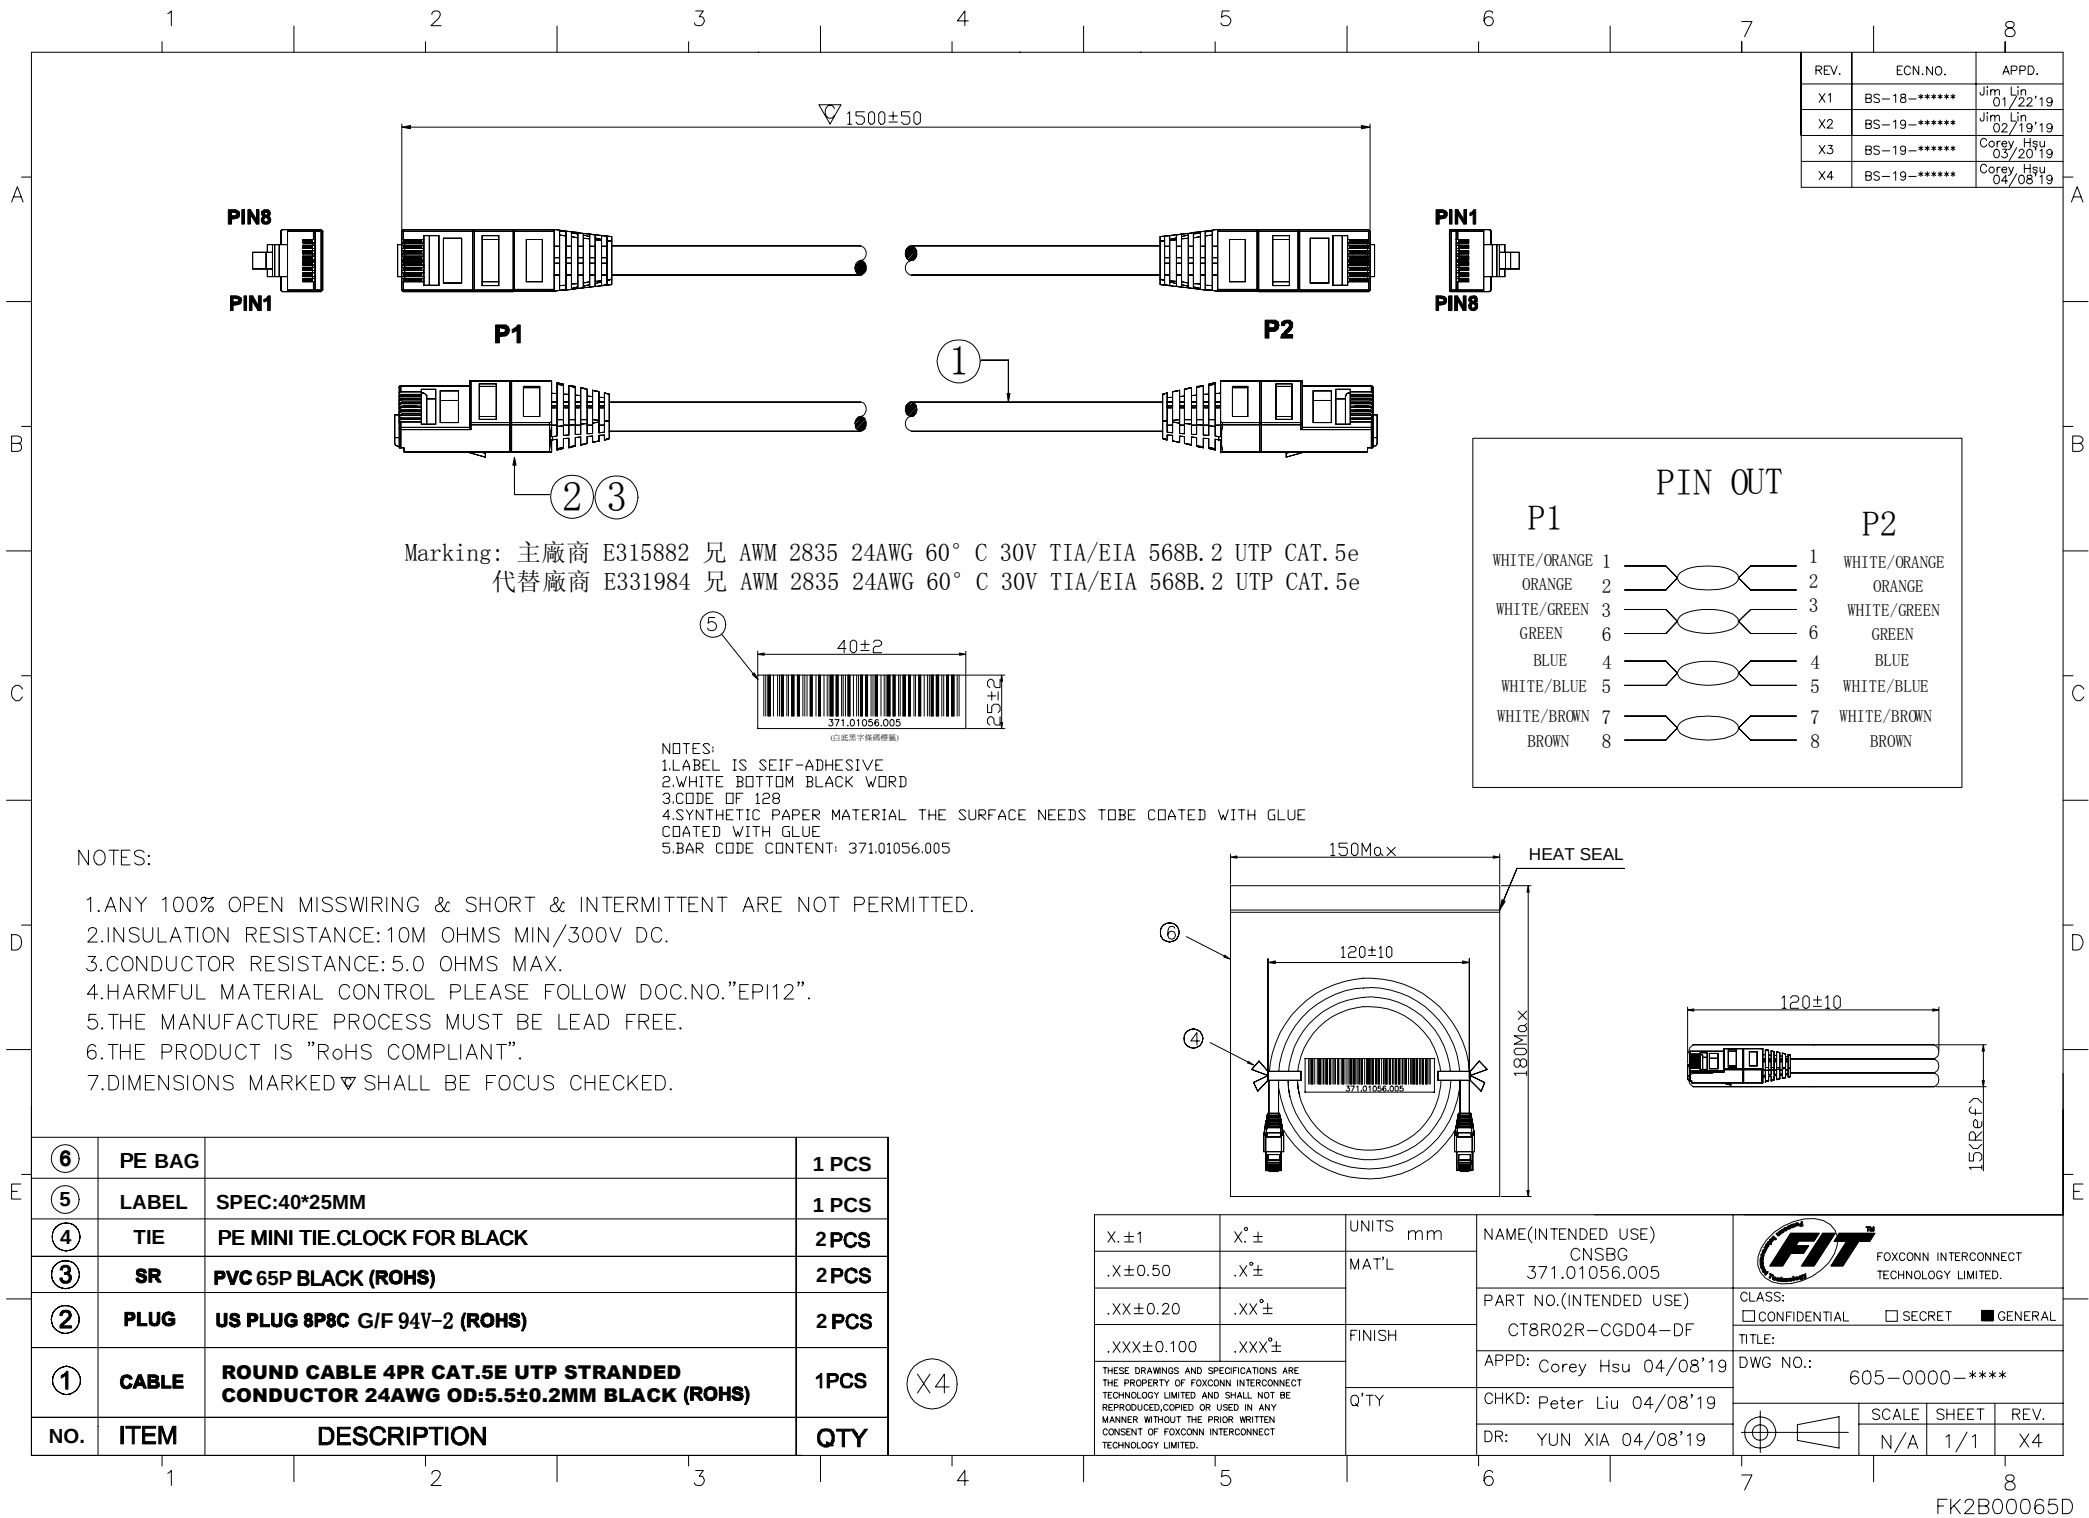

REV.	ECN.NO.	APPD.
X1	BS-18-*****	Jim Lin 01/22'19
X2	BS-19-*****	Jim Lin 02/19'19
X3	BS-19-*****	Corey Hsu 03/20'19
X4	BS-19-*****	Corey Hsu 04/08'19

PIN OUT			
P1		P2	
WHITE/ORANGE	1	WHITE/ORANGE	1
ORANGE	2	ORANGE	2
WHITE/GREEN	3	WHITE/GREEN	3
GREEN	6	GREEN	6
BLUE	4	BLUE	4
WHITE/BLUE	5	WHITE/BLUE	5
WHITE/BROWN	7	WHITE/BROWN	7
BROWN	8	BROWN	8

NOTES:
1.LABEL IS SELF-ADHESIVE
2.WHITE BOTTOM BLACK WORD
3.CODE OF 128
4.SYNTHETIC PAPER MATERIAL THE SURFACE NEEDS TOBE COATED WITH GLUE
5.BAR CODE CONTENT: 371.01056.005

NOTES:

- ANY 100% OPEN MISSWIRING & SHORT & INTERMITTENT ARE NOT PERMITTED.
- INSULATION RESISTANCE:10M OHMS MIN/300V DC.
- CONDUCTOR RESISTANCE:5.0 OHMS MAX.
- HARMFUL MATERIAL CONTROL PLEASE FOLLOW DOC.NO."EPI12".
- THE MANUFACTURE PROCESS MUST BE LEAD FREE.
- THE PRODUCT IS "RoHS COMPLIANT".
- DIMENSIONS MARKED ▽ SHALL BE FOCUS CHECKED.

⑥	PE BAG		1 PCS
⑤	LABEL	SPEC:40*25MM	1 PCS
④	TIE	PE MINI TIE.CLOCK FOR BLACK	2 PCS
③	SR	PVC 65P BLACK (ROHS)	2 PCS
②	PLUG	US PLUG 8P8C G/F 94V-2 (ROHS)	2 PCS
①	CABLE	ROUND CABLE 4PR CAT.5E UTP STRANDED CONDUCTOR 24AWG OD:5.5±0.2MM BLACK (ROHS)	1PCS
NO.	ITEM	DESCRIPTION	QTY

(X4)

X.±1	X°.±	UNITS	mm	NAME(INTENDED USE) CNSBG 371.01056.005	 FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				
.X±0.50	.X°.±	MAT'L							
.XX±0.20	.XX°.±	FINISH		PART NO.(INTENDED USE) CT8R02R-CGD04-DF	CLASS: ☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL				
.XXX±0.100	.XXX°.±			APPD: Corey Hsu 04/08'19	TITLE: DWG NO.: 605-0000-****				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED AND SHALL NOT BE REPRODUCED,COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF FOXCONN INTERCONNECT TECHNOLOGY LIMITED.				CHKD: Peter Liu 04/08'19		SCALE N/A	SHEET 1/1	REV. X4	
				DR: YUN XIA 04/08'19					