


VER.	MARK.	DCR/ECN NO.	DATE	UPDARE DESCRIPTION	SIGNATURE.
00			20220816	First Release	Amy

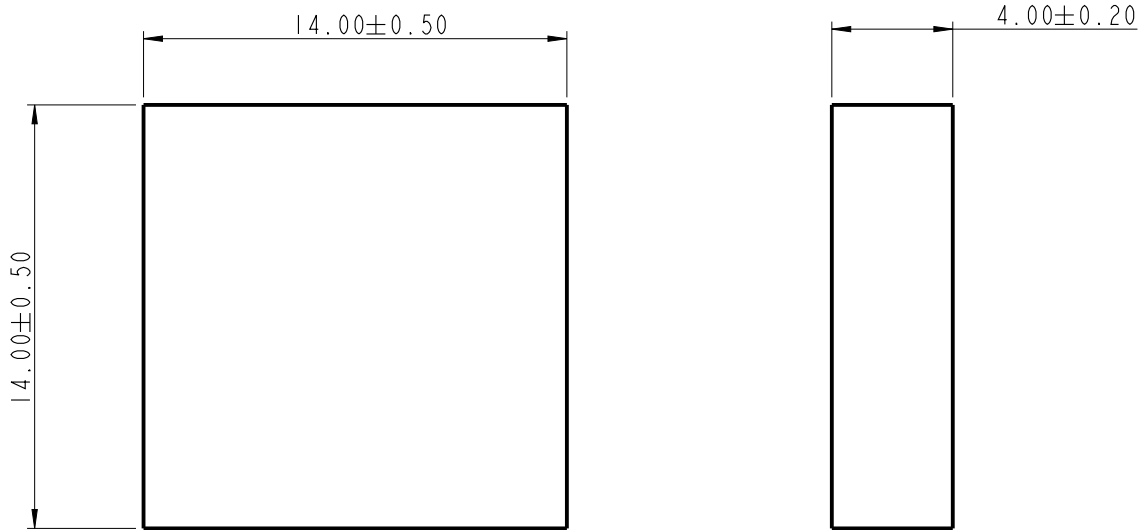

1	Thermal conductivity k (W/mk)	1.5W/m.K (ASTM D5470)
2	Thermal resistance R (°C/W)	@20psi 1.0mm Th=60°C (ASTM 5470 1x1 inch ² test area)
3	Hardness (Shore 00)	35 ASTM 2240
4	Color	TBD
5	With Boron nitride filler	No
6	EMI attenuation	None
7	ESD release film(10 ⁷ -10 ¹¹ Ω)	No
8	UL flammability rating	UL94 V0
9	Supplier PN	TBD
10	Supplier Product Name(series)	TBD

MATERIAL (SPEC.)											SEE NOTES		SCALE 4.000		 Foxconn Industrial Internet 富士康工业互联网																																																																																		
FINISH											SEE NOTES		SHEET 1/1																																																																																				
<table><tr><th>Select Dim.</th><th>Tol.</th><th>A</th><th>B</th><th>C</th><th>EPS</th><th>EPE</th><th>BAG</th><th>CTN</th><th>LABEL</th><th>USR</th></tr><tr><td>0-6</td><td>0.05</td><td>0.05</td><td>0.10</td><td></td><td></td><td></td><td></td><td></td><td>0.20</td><td>0.05</td></tr><tr><td>6-30</td><td>0.10</td><td>0.15</td><td>0.20</td><td>0.50</td><td>0.50</td><td>3.00</td><td></td><td></td><td>0.20</td><td>0.05</td></tr><tr><td>30-120</td><td>0.15</td><td>0.20</td><td>0.30</td><td>0.50</td><td>0.50</td><td>5.00</td><td>2.00</td><td>0.25</td><td>0.10</td><td></td></tr><tr><td>120-300</td><td>0.20</td><td>0.30</td><td>0.40</td><td>1.00</td><td>1.00</td><td>10.00</td><td>3.00</td><td>0.30</td><td>0.15</td><td></td></tr><tr><td>300-450</td><td>0.25</td><td>0.40</td><td>0.50</td><td>2.00</td><td>2.00</td><td>15.00</td><td>5.00</td><td>0.50</td><td>0.20</td><td></td></tr><tr><td>450-600</td><td>0.30</td><td>0.50</td><td>0.60</td><td>3.00</td><td>3.00</td><td>20.00</td><td>5.00</td><td>0.80</td><td>0.20</td><td></td></tr></table>											Select Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR	0-6	0.05	0.05	0.10						0.20	0.05	6-30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05	30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10		120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15		300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20		450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20		UNIT mm		PART NAME IC_THERMAL_PAD							
Select Dim.	Tol.	A	B	C	EPS	EPE	BAG	CTN	LABEL	USR																																																																																							
0-6	0.05	0.05	0.10						0.20	0.05																																																																																							
6-30	0.10	0.15	0.20	0.50	0.50	3.00			0.20	0.05																																																																																							
30-120	0.15	0.20	0.30	0.50	0.50	5.00	2.00	0.25	0.10																																																																																								
120-300	0.20	0.30	0.40	1.00	1.00	10.00	3.00	0.30	0.15																																																																																								
300-450	0.25	0.40	0.50	2.00	2.00	15.00	5.00	0.50	0.20																																																																																								
450-600	0.30	0.50	0.60	3.00	3.00	20.00	5.00	0.80	0.20																																																																																								
<table><tr><td rowspan="2">SIZE A3</td><td colspan="4">MODEL T99X171.00</td><td colspan="4">PART NO. 480.03093.005</td><td colspan="2">DESIGNED Amy</td></tr><tr><td colspan="4">CUSTOMER MODEL Eagle 4K OTT</td><td colspan="4">CUSTOMER PART NO. N/A</td><td colspan="2">APPROVED Henry</td></tr></table>											SIZE A3	MODEL T99X171.00				PART NO. 480.03093.005				DESIGNED Amy		CUSTOMER MODEL Eagle 4K OTT				CUSTOMER PART NO. N/A				APPROVED Henry																																																																			
SIZE A3	MODEL T99X171.00				PART NO. 480.03093.005				DESIGNED Amy																																																																																								
	CUSTOMER MODEL Eagle 4K OTT				CUSTOMER PART NO. N/A				APPROVED Henry																																																																																								