

Inspection Criteria for BFX-AT100

Document revision:0.1

Effectivity

- BFX-AT100 and BFX-UH00
- Mass production.

Prepared by	SH, SON
	Manager, Development Lab #2
Approved by	SY, Yoon
	Head of Development, Development Lab #2

Revision History

Revision	Description of Change	Date
0.1	Draft release	2019.07.24

Table of contents

1.	Purpose of this document	3
1.1	Document scope	3
2.	Definition.....	4
2.1	Inspection condition	4
2.2	Lighting	4
2.3	Inspection angle	4
2.4	Inspection distance	4
2.5	Class Definition	4
3.	Scratch	6
3.1	Define,.....	6
3.2	Scratch Criteria	6
4.	Logo / Label.....	8
4.1	Appearance of Logo / Label.....	8
4.2	Inspection Criteria.....	8
4.2.1	logo & label:	8
4.2.2	Printing incomplete	8
5.	Text printed on the housing.....	9
5.1	CH	9
5.2	Text.....	9
6.	Housing assembly	10
6.1	Housing assembly.....	10
6.1.1	Visual inspection	10
6.2	Gap spec.....	10
6.3	Bottom rubber attached gap spec.....	11
6.4	Label attached gap spec	11
6.5	LED lighting.....	12
7.	Packing	13
7.1	Gift packing.....	13
7.2	Packages.....	13

1. Purpose of this document

This specification establishes the requirements and procedures for BFX-AT100 detail parts and assemblies and product.

This specification is for manufacturing BFX-AT100. This spec is forced on mass production process, HW component functionality check and validation.

1.1 Document scope.

Factory production inspection, Customer inspection.

To improve field issues, some of specifications may be changed upon request by the customer.

Confidential

2. Definition.

2.1 Inspection condition

2.2 Lighting

As follow IPC-A-610G standard. "1.10 Lighting"

Illumination at the surface of workstations should be at least 1000 lm/m² [approximately 93 foot candles]. Light sources should be selected to prevent shadows.

Note: In selecting a light source, the color temperature of the light is an important consideration. Light ranges from 3000-5000°K enable users to distinguish various printed circuit assembly features and contaminates with increased clarity.

2.3 Inspection angle



10~90 degree view and check every angle as user view of each surface

2.4 Inspection distance

Hold the product away from inspector 40cm

2.5 Class Definition

Class	Definition	Part & Location
AA	Customer special requirements.	Items: Logo, Label barcode.
A	Primary surface exposed to direct close-up view in ordinary use.	Items: Printed text, Label, Top and front side of housing, plastic part of key, LED light pipe.
B	Secondary surface exposed but not in direct view in ordinary use.	Items: Rear and each side of housing, bottom cover, I/O connector.
C	Surface not visible in ordinary use.	Items: inside housing, not visible area after assembly, other accessories.

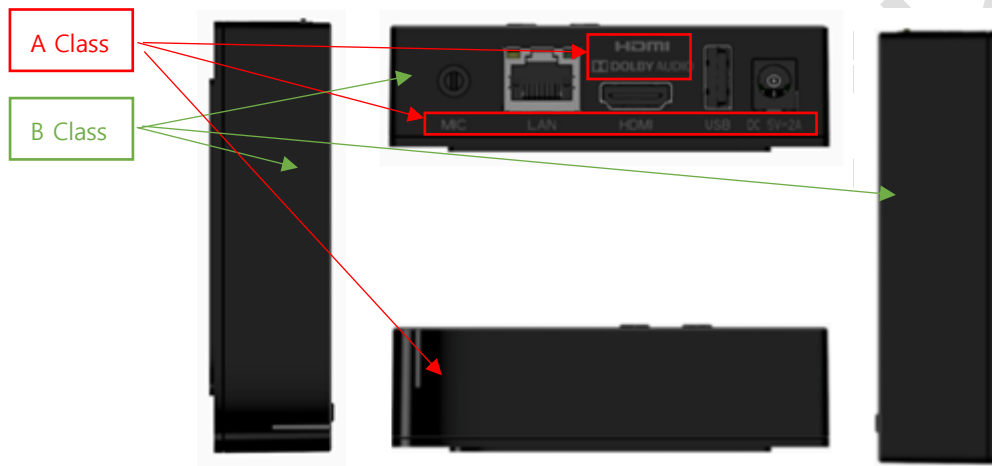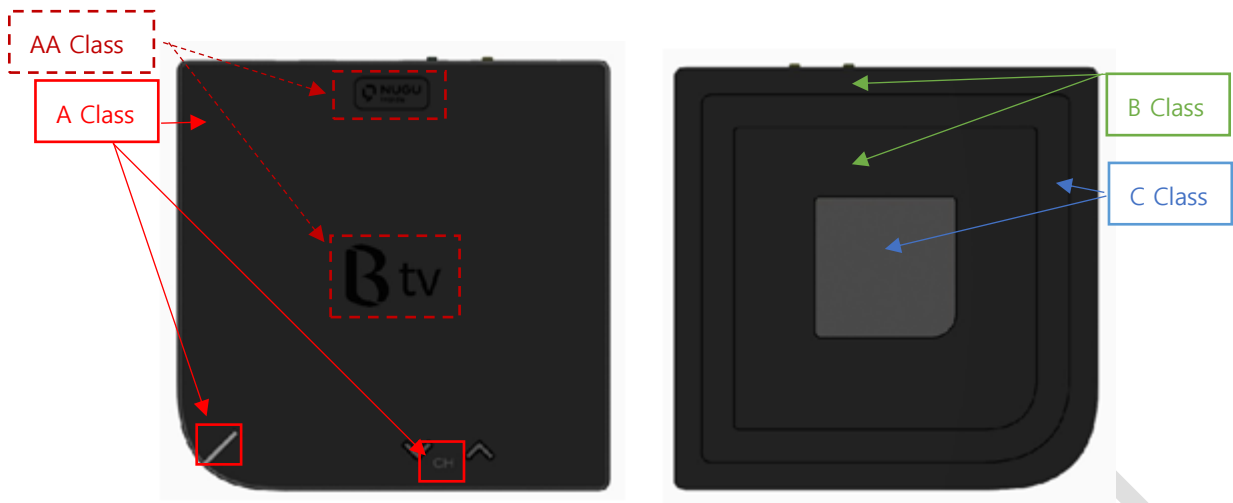

3. Scratch

3.1 Define,

3.1.1 Class AA

Logo, Label barcode

3.1.2 Class A

Printed text, Label, Top side of housing, plastic part of key, LED light pipe.

3.1.3 Class B

Front, Rear and each side of housing, bottom cover, I/O connector

3.1.4 Class C

inside housing, not visible area after assembly, other accessories.

3.2 Scratch Criteria

3.2.1 Class A

Defect Sort	High gloss	Low gloss or Matte
Dot defect	$d \leq 0.1\text{mm}$, excluding $0.1\text{mm} < d < 0.25\text{mm}$ Allowed quantity 1 Or $S \leq 0.05 \text{ mm}^2$ permissible number	$d \leq 0.1\text{mm}$, excluding $0.1\text{mm} < d < 0.25\text{mm}$ Allowed quantity 2, $DS \geq 15\text{mm}$ Or $S \leq 0.05 \text{ mm}^2$ Allowable quantity 2, $DS \geq 15\text{mm}$
Linear Scratch	Within the range of $30\text{mm} \times 30\text{mm}$ Max $w \leq 0.05\text{mm}$, $L \leq 3 \text{ mm}$ Allowable number 2; A total of 6" is allowed for the entire level	Acceptable conditions Max $w \leq 0.05\text{mm}$, $L \leq 12\text{mm}$ Allowed quantity 1

3.2.2 Class B


Defect Sort	High gloss	Low gloss or Matte
Dot defect	$D \leq 0.1\text{mm}$, excluding $0.1\text{mm} < d < 0.35\text{mm}$ Allowable quantity 2, $DS \geq 15\text{mm}$ or $S \leq 0.1\text{mm}^2$ Allowable quantity 2, $DS \geq 15\text{mm}$	$D \leq 0.1\text{mm}$, excluding; $0.1\text{mm} < d < 0.35\text{mm}$ Allowable quantity 2, $DS \geq 15\text{mm}$ or $S \leq 0.1\text{mm}^2$ Allowable quantity 2, $DS \geq 15\text{mm}$
Linear Scratch	Acceptable conditions: Within the range of $30\text{mm} \times 30\text{mm}$ Max $w \leq 0.05\text{mm}$, $L \leq 3 \text{ mm}$ Allowable number 2; A total of 6 allowed for the entire level	Acceptable conditions Max $w \leq 0.05\text{mm}$, $L \leq 15\text{mm}$ Allowed quantity 1

3.2.3 Class C


Defect Sort	High gloss	Low gloss or Matte
Dot defect	Appearance defects such as spots and scratches are not controlled, but the dimensions cannot be abnormal and cannot affect the assembly of the mechanism.	
Linear Scratch	Acceptable conditions Within the range of 30mm*30mm Max $w \leq 0.05\text{mm}$, $L \leq 3\text{ mm}$ Allowable number 2; A total of 6 allowed for the entire level	

3.2.4 Remark

3.2.4.1 Scratch



3.2.4.2 Dot



$$D = (W + L) / 2$$

3.2.4.3 Can easy clean within 5 sec for dirty.

3.2.4.4 Not above list, signature limited sample.

3.2.4.5 Crack is Not allowed

3.2.4.6 DS = Distance

4. Logo / Label

4.1 Appearance of Logo / Label

Class: AA

4.1.1 Reference location



4.2 Inspection Criteria

Printing on label should be clear

4.2.1 logo & label:

not acceptable for illegible defect.

4.2.2 Printing incomplete

a. In logo, not acceptable for discrepancy in color, notch, incomplete painting, sawtooth etc.

b. In label, not acceptable for incomplete painting, maximum 1 notch or sawtooth (0.25mm) is acceptable.

c.


Not allowed: broken, dirty, wrong direction, wrong location

5. Text printed on the housing

5.1 CH

5.1.1 Criteria:

Should be printed center between $\wedge$, $\vee$ Key

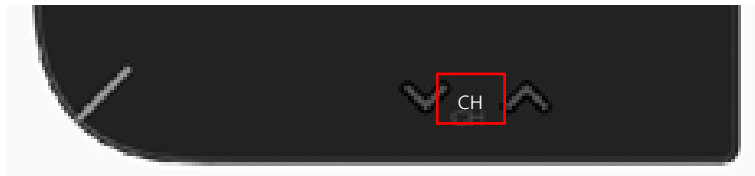

Please refer to the production spec document for technical data.

5.2 Text

5.2.1 Criteria:

Should be printed as a design.



Please refer to the production spec document for technical data.

6. Housing assembly

6.1 Housing assembly

6.1.1 Visual inspection

All parts must be assembled according to the drawings.

6.1.1.1 Housing

Not allowed conditions.

any dirty, rough surface, bending, broken, damage, Broken, bending, crack, open housing

6.1.1.2 Connectors.

Not allowed conditions

oxidation / dirty on connector, pin bending & damage, foreign bodies inside.

6.2 Gap spec

Define the gap spec between top housing assembly parts.

No	Item	Gap Spec	Remark
1	KEY knob gap	MAX 0.3mm	
2	LED Light pipe gap	MAX 0.2mm	
3	Bottom case assembly gap	MAX 0.2mm	
4	Rear connector assembly gap	MAX 0.5mm	



6.3 Bottom rubber attached gap spec

6.3.1 Target condition:

attachment center line.

6.3.2 Criteria:

Should be attached according to the attachment inside line
over the attachment line is not allowed



6.4 Label attached gap spec


6.4.1 KC label

6.4.1.1 Target condition:

KC label should be attached from the edge 2.5mm

6.4.1.2 Criteria:

Acceptable level $\pm 0.5\text{mm}$, Angle ± 2.5 degree

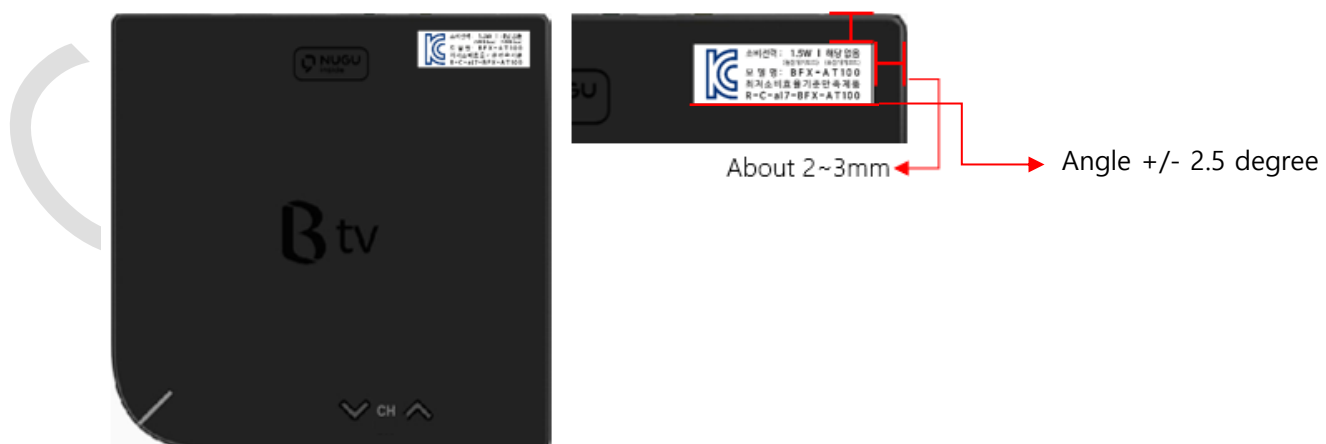

6.4.2 SET label

6.4.2.1 Target condition:

STB label should be attached the center

6.4.2.2 Criteria:

Should be attached according to the attachment inside line
over the attachment line is not allowed



6.5 LED lighting

6.5.1 Criteria:

The LED light should be turn on the only LED pipe.

Not allowed that the LED light should not be visible on the other area(Top plate, each side and rear site)

- Light condition: TBD.

7. Packing

7.1 Gift packing

7.1.1 Criteria:

The packing accessory (in-box items) should be not missing.

Please refer to the [Eagle_BFX-AT100] SKB Android TV_UADS in details - In-Box items

- reference.

a. Adapter



Classification	Description
Spec	5V / 2A
Color	Black
Certification	KC / RoHS

b. RCU



Classification	Description
Spec	IR/Bluetooth type remote control unit
Color	Black
Certification	RoHS

c. HDMI Cable



Classification	Description
Spec	Bandwidth 18Gbps, 1.8M
Color	Black
Certification	RoHS

d. LAN Cable



Classification	Description
Spec	Cat. 5e UTP LAN cable, 1.5M
Color	Gray
Certification	RoHS

7.2 Packages

7.2.1 Criteria:

Package damage is not allowed.

E.O.D