

ITEM NUMBER	B123L188

Engineering Drawing

REVISED	DESCRIPTION	APPROVED	DATE
A0	First release	Huang	2020.07.06

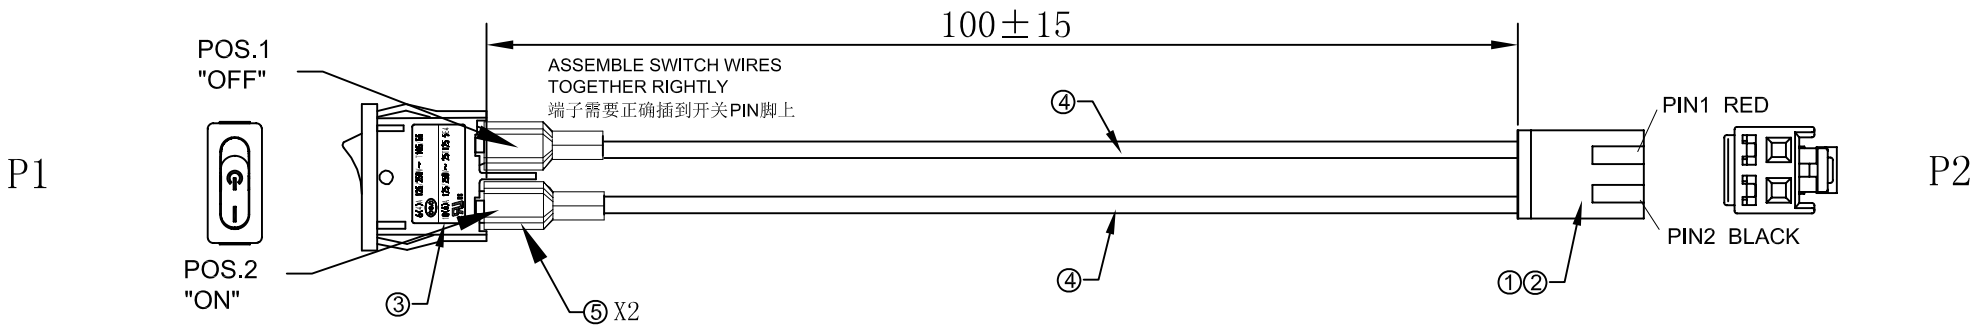



P1 SWITCHING CIRCUIT

P1-POS.1=OPEN CIRCUIT

P1-POS.2=2-1

Pin Assignments

P1	P2	WIRE	REMARKS	COLOR
1	1	18AWG	UL1007	RED
2	2			BLACK

ELECTRICAL PROPERTIES:

1. 100% Short & Open Test
2. Conductor resistance:2Ω Max
3. Insulation reistance:10M Ohm Min/300V DC/0.1S
4. Hi-Pot:300V AC/0.1S

CABLE MARKING: E148000 兄 AWM STYLE 1007 18AWG 80°C 300V VW-1 - - -c 兄
AWM I A/B 80°C 300V FT1 -F- -LF- PCXX LTK

NO.	SPECIFICATION	QTY	UNIT
5	Terminal type-187 and red shell	2	SET
4	UL1007 18AWG VW-1 , RED AND BLACK	A/R	M
3	Rocker Switch:HS6	1	PCS
2	CRIMP TERMINAL:3.96MM PITCH;JVT P/N:JVT1121TP-SNX; CRIMP TERMINAL:3.96MM PITCH;JCTC P/N:13962TOB-2E;	2	PC
1	HOUSING, 3.96PITCH,COLOR:WHITE,JVT P/N:JVT1121HNO-02 HOUSING, 3.96PITCH,COLOR:WHITE,JCTC P/N:13962H00-2P-HF	1	PC

APPROVED	R. S. ZHANG	2020.07.06
EXAMINE	Y. K. YAO	2020.07.06
CHECKED	P. ZHANG	2020.07.06
DRAWING	W. Y. HUANG	2020.07.06

CUSTOMER NUMBER:

TOLERANCE	Length	Angle
.X	±0.3	±1°
.XX	±0.2	±0.5
.XXX	±0.1	±0.2

TITLE: SWITCH TO HSG-2P

BAOYUANDA ELECTRONICS CO., LTD

BAOYUANDA

UNIT: mm

PAGE 1/1 | ITEM NUMBER B123L188 | REV A/0