




Sporton International INC.  
No. 52, Hwa Ya 1st Rd,  
Hwa Ya Technology Park,  
Guishan Dist., Taoyuan City,  
Taiwan, R.O.C.  
tel: +886-3-3273456  
fax: +886-3-3138005  
www.sporton.com.tw

Data: 1 File: D:\ANDY\EMIData\ICC\Eagle(2022.08.03).EM6 (4)

Date: 2022-08-03

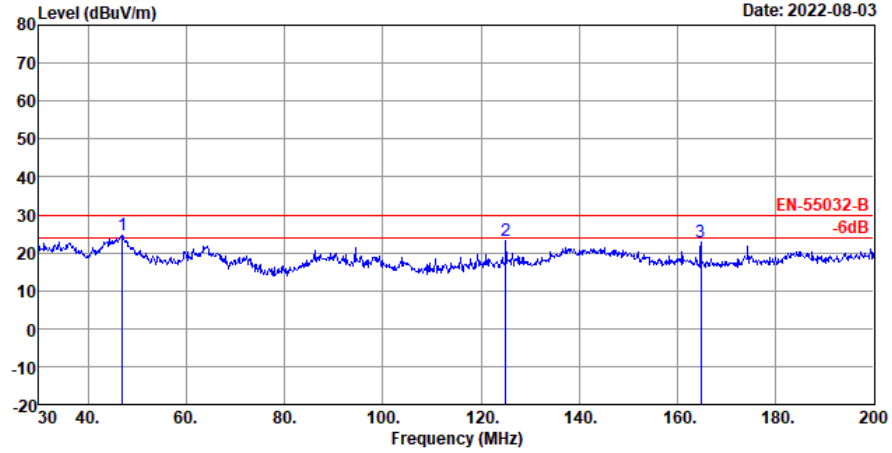

Site : 10CH01-HY  
Condition: EN-55032-B 10m BICONICAL-1110317 VERTICAL  
EUT : Eagle  
Power : 230V/50Hz  
Model :  
mode : Ipef  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :


|       | Freq   | Level  | Over Limit | Limit Line | Read Level | CableAntenna Loss | Factor | Preamp Factor | Remark | A/Pos | T/Pos |
|-------|--------|--------|------------|------------|------------|-------------------|--------|---------------|--------|-------|-------|
|       | MHz    | dBuV/m | dB         | dBuV/m     | dBuV       | dB                | dB/m   | dB            |        | cm    | deg   |
| 1 MAX | 47.00  | 24.47  | -5.53      | 30.00      | 40.76      | 1.76              | 10.60  | 28.65         | Peak   | ---   | ---   |
| 2     | 125.03 | 23.21  | -6.79      | 30.00      | 37.53      | 2.92              | 11.20  | 28.44         | Peak   | ---   | ---   |
| 3     | 164.81 | 22.70  | -7.30      | 30.00      | 35.22      | 3.38              | 12.38  | 28.28         | Peak   | ---   | ---   |



Sporton International INC.  
No. 52, Hwa Ya 1st Rd,  
Hwa Ya Technology Park,  
Guishan Dist., Taoyuan City,  
Taiwan, R.O.C.  
tel: +886-3-3273456  
fax: +886-3-3138005  
www.sporton.com.tw

Data: 2 File: D:\ANDY\EMIData\ICC\Eagle(2022.08.03).EM6 (4)

Date: 2022-08-03

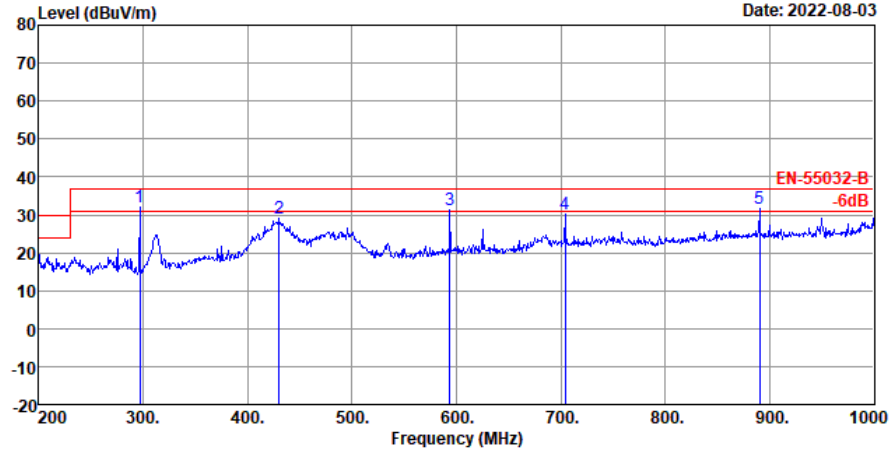

Site : 10CH01-HY  
Condition: EN-55032-B 10m LOG-1110317 VERTICAL  
EUT : Eagle  
Power : 230V/50Hz  
Model :  
mode : Ipef  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :


|       | Freq   | Level  | Over Limit | Limit Line | Read Level | Cable Loss | Antenna Factor | Preamp Factor | Remark | A/Pos | T/Pos |
|-------|--------|--------|------------|------------|------------|------------|----------------|---------------|--------|-------|-------|
|       | MHz    | dBuV/m | dB         | dBuV/m     | dBuV       | dB         | dB/m           | dB            |        | cm    | deg   |
| 1 MAX | 296.80 | 32.19  | -4.81      | 37.00      | 55.09      | 4.28       | 13.24          | 40.42         | Peak   | ---   | ---   |
| 2     | 430.40 | 29.26  | -7.74      | 37.00      | 47.81      | 5.20       | 16.50          | 40.25         | Peak   | ---   | ---   |
| 3     | 593.60 | 31.25  | -5.75      | 37.00      | 45.88      | 6.17       | 19.27          | 40.07         | Peak   | ---   | ---   |
| 4     | 704.00 | 30.30  | -6.70      | 37.00      | 43.19      | 6.85       | 20.36          | 40.10         | Peak   | ---   | ---   |
| 5     | 890.40 | 31.69  | -5.31      | 37.00      | 42.22      | 7.55       | 21.71          | 39.79         | Peak   | ---   | ---   |



Sporton International INC.  
No. 52, Hwa Ya 1st Rd,  
Hwa Ya Technology Park,  
Guishan Dist., Taoyuan City,  
Taiwan, R.O.C.  
tel: +886-3-3273456  
fax: +886-3-3138005  
www.sporton.com.tw

Data: 3 File: D:\ANDY\EMIData\ICC\Eagle(2022.08.03).EM6 (4)

Date: 2022-08-03

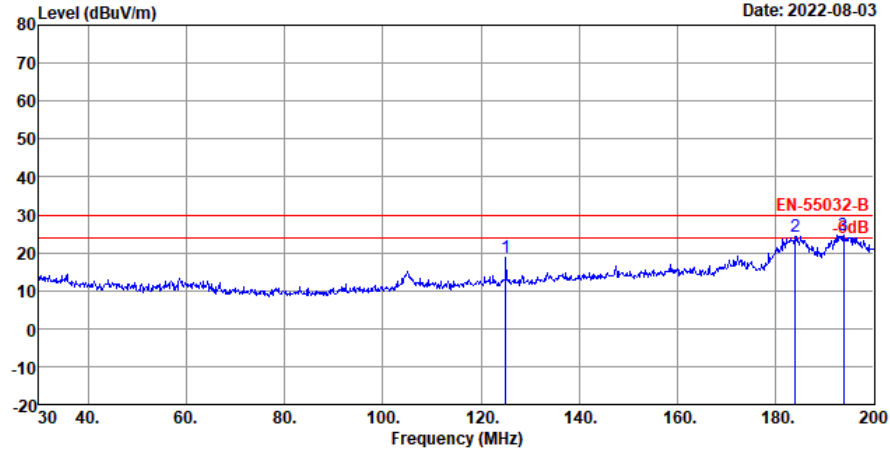

Site : 10CH01-HY  
Condition: EN-55032-B 10m BICONICAL-1110317 HORIZONTAL  
EUT : Eagle  
Power : 230V/50Hz  
Model :  
mode : Ipef  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :


|       | Freq   | Level  | Over Limit | Limit Line | Read Level | CableAntenna Loss | Factor | Preamp Factor | Remark | A/Pos | T/Pos |
|-------|--------|--------|------------|------------|------------|-------------------|--------|---------------|--------|-------|-------|
|       | MHz    | dBuV/m | dB         | dBuV/m     | dBuV       | dB                | dB/m   | dB            |        | cm    | deg   |
| 1     | 125.03 | 18.60  | -11.40     | 30.00      | 32.92      | 2.92              | 11.20  | 28.44         | Peak   | ---   | ---   |
| 2     | 184.02 | 24.37  | -5.63      | 30.00      | 35.57      | 3.58              | 13.40  | 28.18         | Peak   | ---   | ---   |
| 3 MAX | 193.88 | 24.57  | -5.43      | 30.00      | 34.58      | 3.69              | 14.39  | 28.09         | Peak   | ---   | ---   |



Sporton International INC.  
No. 52, Hwa Ya 1st Rd,  
Hwa Ya Technology Park,  
Guishan Dist., Taoyuan City,  
Taiwan, R.O.C.  
tel: +886-3-3273456  
fax: +886-3-3138005  
www.sporton.com.tw

Data: 4 File: D:\ANDY\EMIData\ICC\Eagle(2022.08.03).EM6 (4)

Date: 2022-08-03

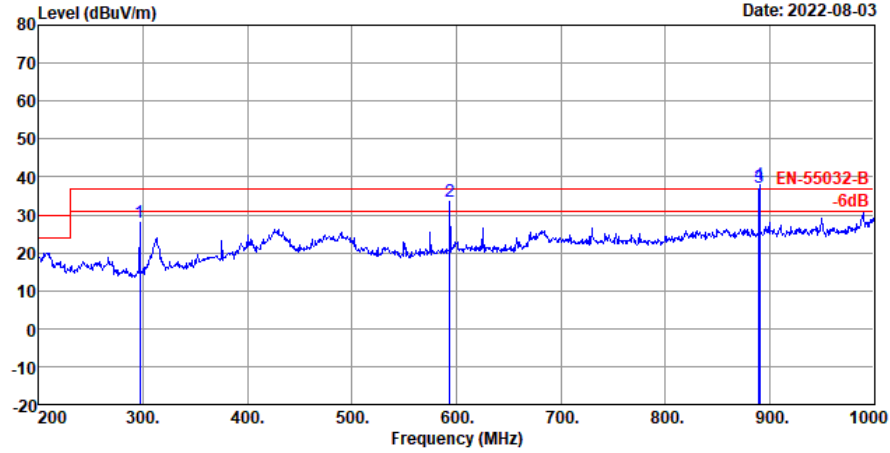

Site : 10CH01-HY  
Condition: EN-55032-B 10m LOG-1110317 HORIZONTAL  
EUT : Eagle  
Power : 230V/50Hz  
Model :  
mode : Ipef  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :  
memo :

|        | Freq   | Level  | Over Limit | Limit Line | Read Level | CableAntenna Loss | Preamp Factor | Remark     | A/Pos | T/Pos |
|--------|--------|--------|------------|------------|------------|-------------------|---------------|------------|-------|-------|
|        | MHz    | dBuV/m | dB         | dBuV/m     | dBuV       | dB                | dB/m          | dB         | cm    | deg   |
| 1      | 296.80 | 27.95  | -9.05      | 37.00      | 50.85      | 4.28              | 13.24         | 40.42 Peak | ---   | ---   |
| 2      | 593.60 | 33.41  | -3.59      | 37.00      | 48.04      | 6.17              | 19.27         | 40.07 Peak | ---   | ---   |
| 3 FAIL | 890.11 | 37.21  | 0.21       | 37.00      | 47.74      | 7.55              | 21.71         | 39.79 QP   | 100   | 165   |
| 4 MAX  | 890.40 | 38.09  | 1.09       | 37.00      | 48.62      | 7.55              | 21.71         | 39.79 Peak | ---   | ---   |